

L454 / 454L

Closed Front Four-Post Lift Rack

SPECIFICATIONS []



L454 Closed Front 4-Post Lift


Power Requirements	208-230 VAC, single phase power, 26 Amp	
Air Supply Requirements (Lift)	90 - 150 psi (6.2 - 10.3 bar)	
Air Supply Requirements (Jacks)	125 psi min (8.6 bar)	
Minimum Concrete Spec.	4 in. (102 mm) thick, 3000 psi (20,700 kPA) rating	
Maximum Floor Variation	3 in. (76 mm) between any two posts	
Max Vehicle Weight	18,000 lbs. (8164 kg)	
Alignment Height	Any of 16 lock positions	
Min. Four-Wheel Alignment	88 in. (2235 mm)	
Lifting Speed	64 seconds	
Lowering Speed	40 seconds	
Max Wheelbase	L454	L454L
General Service	193 in. (4902 mm)	227 in. (5766 mm)
Two-Wheel Alignment	177 in.* (4496 mm)	211 in.* (5360 mm)
Four-Wheel Alignment	158 in. (4013 mm)	

* Jacking compensation may be required to align some long wheelbase vehicles.

Feature	JT	T-PS	T-IS
9000-lb Swing Air Jacks (2)	✓	✓	✓
		✓	✓
			✓
			✓

Dimension	
Outside Width (W1)	139.5 in. (3537 mm)
Inside Width (W2)	40 in. (1016 mm)
L451 Length (L)	255 in. (6477 mm)
L451L Length (L)	287.5 in. (7303 mm)
Runway Width (R)	26 in. (660 mm)
Runway Height (H1)	75 in. (1905 mm)
Stack Height (H2)	8.75 in. (222 mm)
Post Height (H3)	98 in. (2489 mm)

Options	Add. Length	Kit #
Approach Ramp Extensions	17.5 in. (445 mm)	20-3145-1
Extended Approach Ramp Extensions	40 in. (1016 mm)	20-3146-1
Drive Thru Kit	38 in. (965 mm)	20-3135-1
Front Mount Power Unit Bracket	-	20-3072-1
Rack Lighting	-	20-2993-1

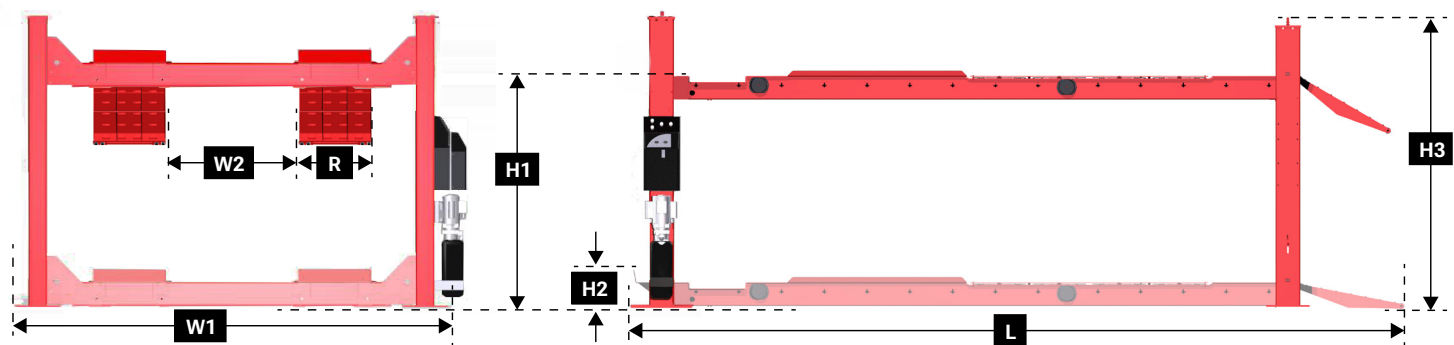

For lift rack information visit:
hunter.com/alignment-racks

For local contact visit:
hunter.com/contact


For general inquiries visit:
www.hunter.com or call 800-448-6848

L454 / 454L

Closed Front Four-Post Lift Rack

LAYOUT DIAGRAM

L454 AND L454L DIMENSIONS / L454L ILLUSTRATED

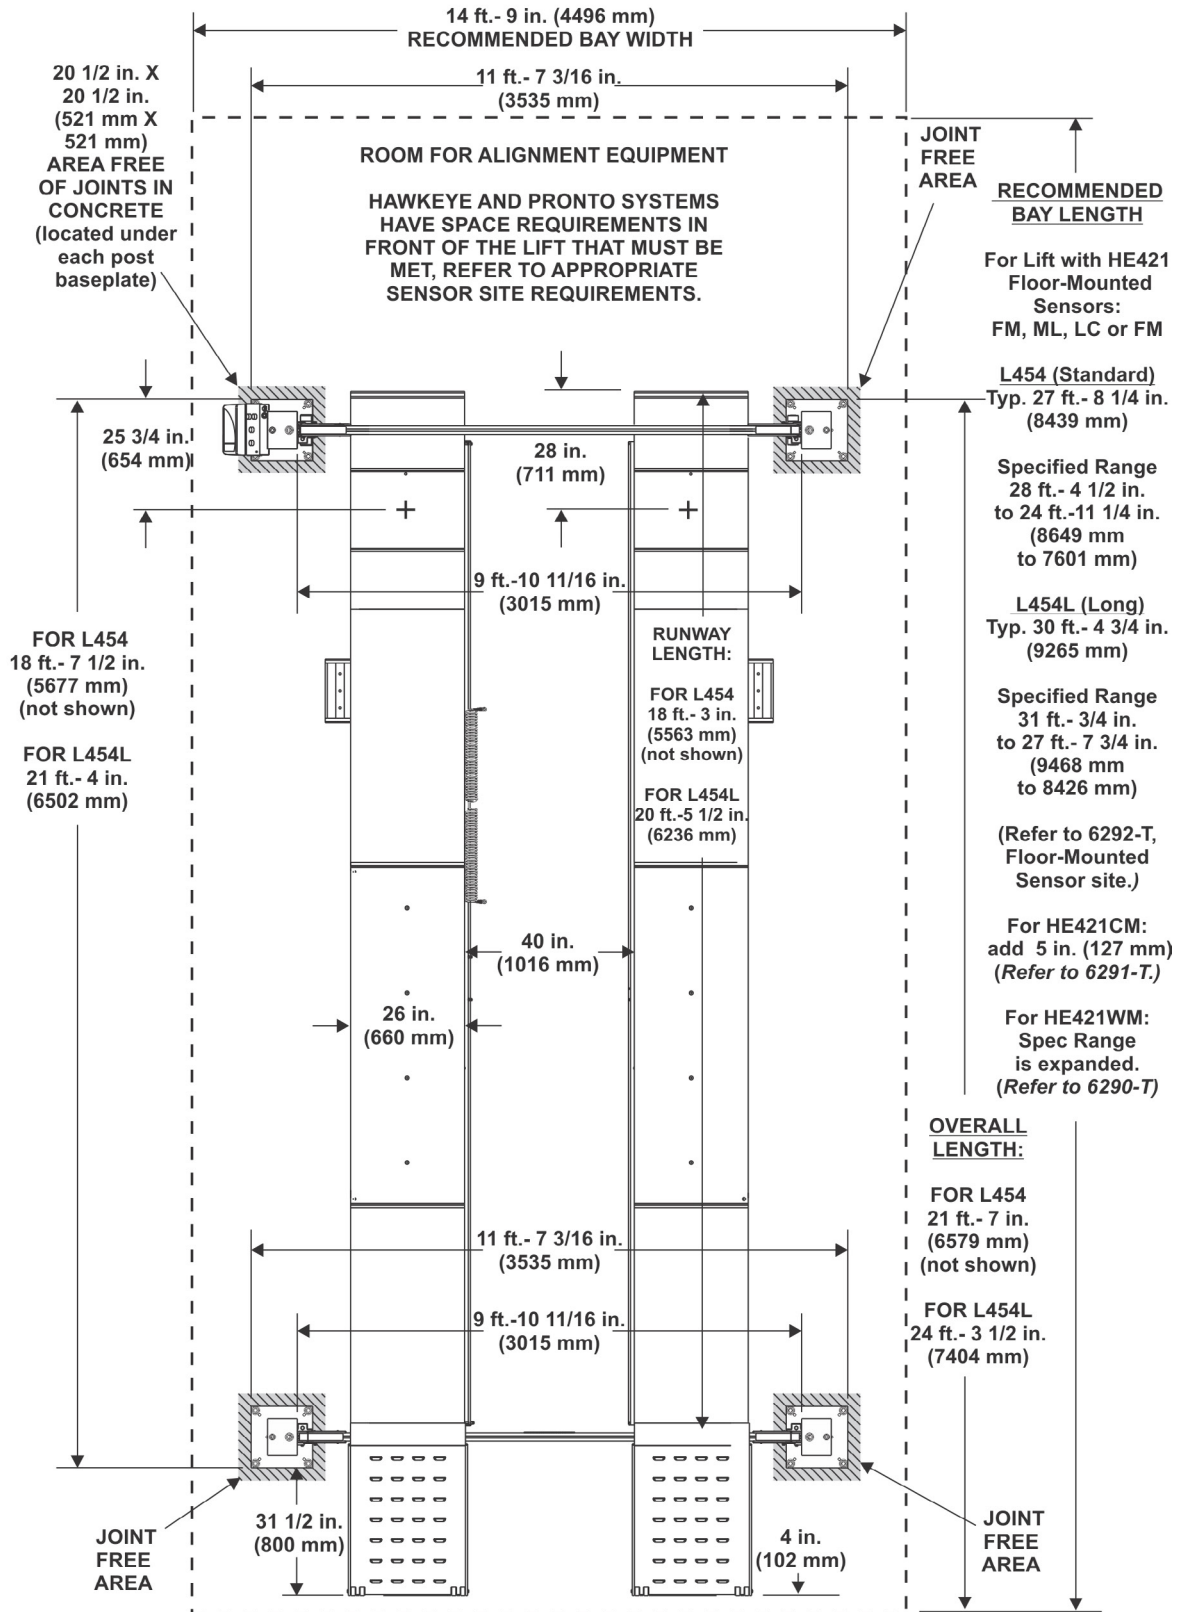

*If installing over basement or near seams and cracks, refer to Form 4963-T. For exact placement of lag bolts, refer to Form 6530-T.