

# REVOLUTION SERIES™

Fully-Automatic Tire Changer

**HUNTER**  
Engineering Company

## SPECIFICATIONS [ ]




**TCRH**



**TCR1X**

TCRH / TCR1X / TCR1S	
Power Requirements	208-230V, 1 ph, 60Hz, 24A, NEMA 30 amp plug, L6-30P, 5,520 watts
Air Supply Requirements	125 ± 25 psi (8.6 ± 1.7 bar)
Internet Requirements	Hardwire, 10+mbps up and down
Air Consumption	1 SCFM (27 L/Min)
Shipping Weight	1,856 lbs (842 kg)
Width (W)	52 in. (1,321 mm)
Height (H1)	TCR1S: 78.5 in. (1,994 mm)   TCRH / TCR1X: 86 in. (2,184 mm)
Height (H2)	75.5 in. (1,918 mm)
Depth (D)	Wheel Lift Up: 67 in. (1,702 mm) Wheel Lift Down: 78 in. (1,981 mm)

TCR1X / TCR1S	
Mount / Demount Tool	Polymer Self Inserting Leverless
Clamping Type	Center w/ Quick Clamp
Bead Loosening Type	Upper / Lower Roller
Match Mounting Capable	Yes
Rim Diameter Range	12 in. - 30 in. (305 mm - 762 mm)
Maximum Tire Diameter	50 in. (1,270 mm)
Maximum Wheel Width	15 in. (381 mm)
Drive	Variable up to 15 rpm CW / CCW   Torque: 875 ft-lbs (1186 Nm)

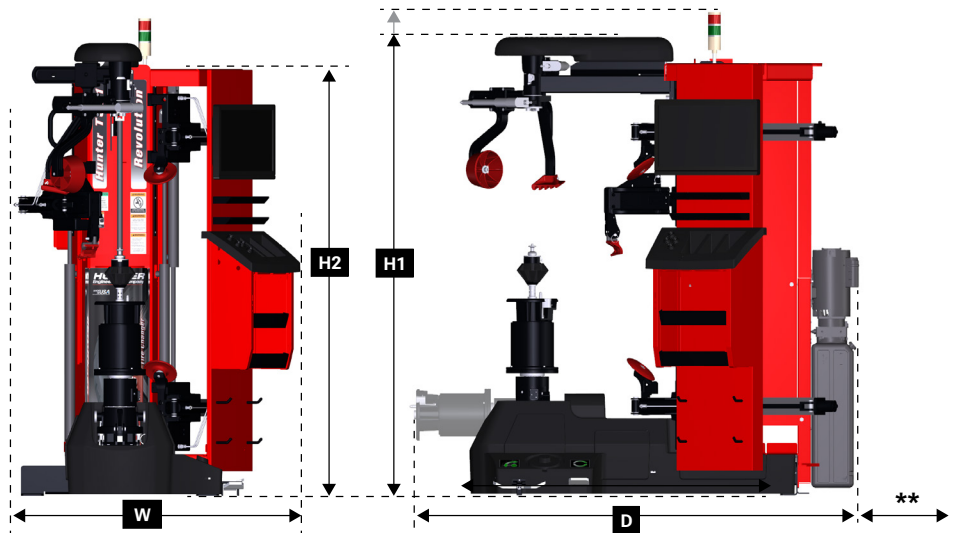

\*\* Recommended Distance to Wall: 12 in. (305 mm)

For tire changer information visit:  
[hunter.com/tire-changers](http://hunter.com/tire-changers)

For local contact visit:  
[hunter.com/contact](http://hunter.com/contact)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form 7082-T, 05-24  
Supersedes Form 7082-T, 07-20a  
Copyright ©2024, Hunter Engineering Company