

RX10 & RX12 Scissor Lifts

Maximum productivity, minimum space

UPDATED



RX10/12 Scissor Lift

Large capacity with a small footprint

EXCLUSIVE


Best-in-class drive-on height



STANDARD

Wide runways

- ✓ 24 in. runways accept wide vehicles

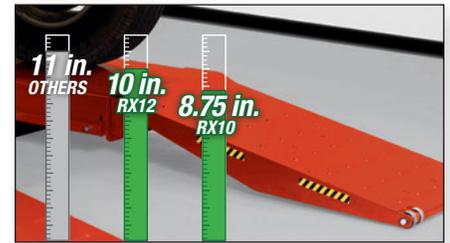

- ✓ Minimize clearance issues

Stainless steel turnplates



- ✓ Maximum corrosion resistance for long life
- ✓ Optional PowerSlide® turnplates (shown) lock/unlock automatically

STANDARD

Integrated air line



- ✓ Convenient air source for tools at front and rear

PATENTED

Sensor feedback system*



- ✓ Sensors keep runway level
- ✓ Safely stops if obstructed

STANDARD

Velocity safety fuses




- ✓ Instantaneous shutdown in event of hydraulic failure

* Shown with protective cover removed

STANDARD


Two Swing Air Jacks

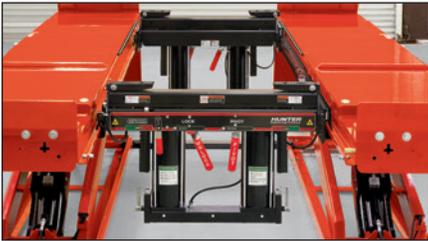

- ✓ 6,000-lb. capacity
- ✓ Technicians' favorite

EXCLUSIVE

Louvered ramps

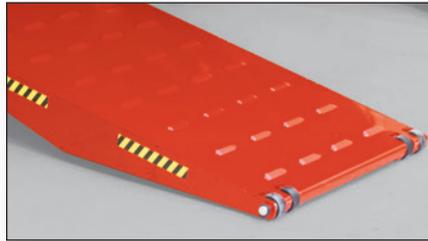

- ✓ Prevent wheel spin in wet conditions
- ✓ More effective than diamond tread or abrasive strips

PATENTED

Control panel



- ✓ Complete operation from the console
- ✓ Optional PowerSlide® Inflation Station and FIA control



RX10KLIS shown with optional light kit

STANDARD

Safety locks



- ✓ Precision-fit teeth lock runways at 16 level height positions

EXCLUSIVE

Movable work steps




- ✓ 10 secure positions
- ✓ Lightweight design

PATENTED

OPTIONAL

Inflation Station

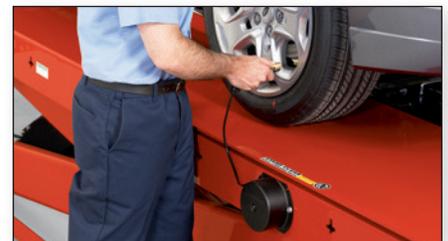

- ✓ Automatically fills or bleeds each tire
- ✓ No dangling air lines

Exclusive features, enhanced capabilities

EXCLUSIVE

Fast descent speed

- ✓ 50% faster lowering times
- ✓ Ensures a soft landing by automatically slowing the last several inches

FAST
Descent

0:25

0:50

Others



STANDARD

Swing Air Jacks

- ✓ Lift vehicles off the runways during alignment procedures and other multi-service operations
- ✓ 6,000-lb. (2722-kg) capacity
- ✓ Folding design provides lowest-profile

133-85-1 — 6,000-lb. Capacity Swing Air Jack

EXCLUSIVE OPTIONAL

Flush-mount installation

- ✓ Accommodate lowered vehicles or expensive spoilers
- ✓ Ideal for “showcase” shops
- ✓ Drive-thru capability

Add **F** to any RX10/12 model number



EXCLUSIVE **OPTIONAL**

AlignLights system

- ✓ Bright and efficient LED light source underneath the vehicle
- ✓ Automatically turns on when the lift is raised and turns off when the lift is lowered to the floor
- ✓ AlignLights is an ALI-listed accessory

20-3438-1 — *AlignLights system*



Standard equipment

- ✓ Stainless steel turnplates
- ✓ Flush-mounted, full-floating slipplates (PowerSlide® slipplates on PS and IS models)
- ✓ Two movable work steps (not included with flush-mount installations)
- ✓ Louvered ramps with built-in wheel stops
- ✓ Front wheel stops
- ✓ Two wheel chocks
- ✓ Built-in, full-length jack rails
- ✓ Built-in air line kit



Standard **stainless steel turnplate** shown.

PS and IS models are equipped with PowerSlide® turnplates.

OPTIONAL


Extension kits

Approach ramp extensions



12 in. kit – 20-3112-1
Standard with RX12K


17 in. kit – 20-3113-1
Adds approximately 5 in. to RX12K when substituted for 20-3112-1



40 in. kit* – 20-2169-1
Adds approximately 28 in. to RX12K

50 in. kit* – 20-2189-1
Adds approximately 38 in. to RX12K

Drive-thru conversion kits*

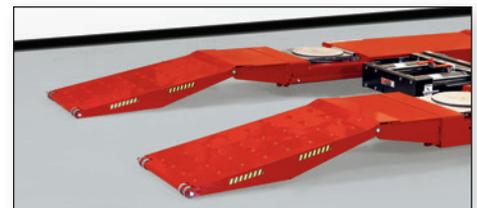

52 in. kit – 20-2498-1
For camera sensors

63 in. kit – 20-2501-1
For conventional sensors

* Quick-release pins included.

Hunter offers two fully integrated options to enhance productivity



FIA Fully Integrated Alignment

FIA allows WinAlign® aligners to control the lift features for ultimate productivity. Two patented designs offer greater flexibility and time-saving capabilities.



Shown with optional aligner console, sensors, bar code reader, target support brackets, and lights




PATENTED

PowerSlide® edition


- ✓ Locks slipplates and turnplates with the touch of a button or automatically through an FIA-equipped aligner*
- ✓ No more struggles with lock pins
- ✓ Avoid wear and tear and extend the life of your turnplates



STANDARD

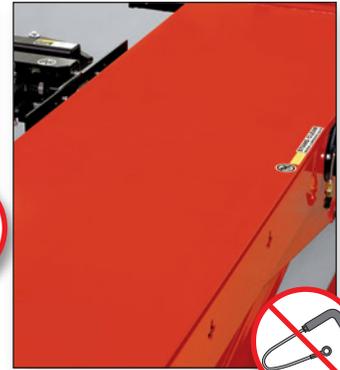


STANDARD

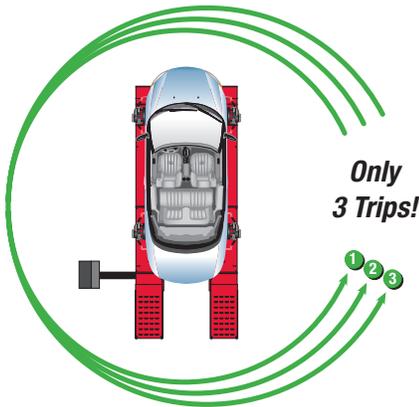

Minimize trips around the car

- 1 Mount targets
- 2 Make adjustments
- 3 Remove targets
- 4 Jack vehicle and compensate sensors
- 5 Lower leveling legs (if equipped)
- 6 Remove slipplate and turnplate pins
- 7 Replace slipplate and turnplate pins
- 8 Raise leveling legs (if equipped)

Yesterday's Technology

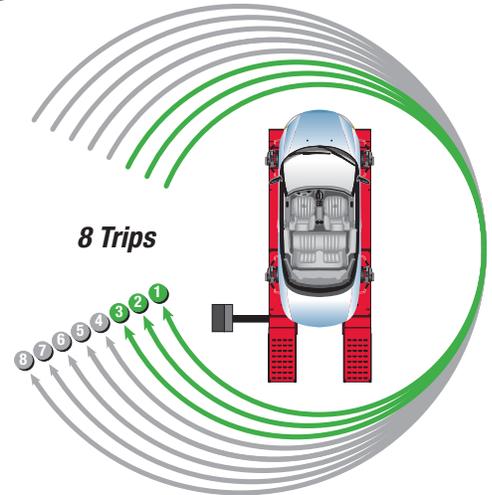

PATENTED

Inflation Station edition

- ✓ Includes PowerSlide® slipplates and turnplates
- ✓ Automatically inflate all four tires simultaneously
- ✓ Record starting and final pressure*
- ✓ Hose recoils to keep work area clear



Printouts show starting and final tire pressures.*

* Requires FIA equipped aligner with WinAlign® 10.x software or greater

Specifications

	RX12K	RX10KL	RX10K
Max. vehicle weight	12,000 lbs. (5443 kg)	10,000 lbs. (4536 kg)	10,000 lbs. (4536 kg)
Max. wheelbase	surface/flush		
General service	184/180 in. (4673/4572 mm)	184/180 in. (4673/4572 mm)	171/167 in. (4343/4241 mm)
Two-wheel alignment	179/175 in. (4547/4445 mm)	179/175 in. (4547/4445 mm)	166/162 in. (4216/4115 mm)
Four-wheel alignment	158 in. (4013 mm)	158 in. (4013 mm)	158 in. (4013 mm)
Min. four-wheel alignment	88 in. (2235 mm)	88 in. (2235 mm)	88 in. (2235 mm)
Lowered height	10 in. (254 mm)	8.75 in. (222 mm)	8.75 in. (222 mm)
Max. lifting height	71 in. (1803 mm)	72 in. (1829 mm)	72 in. (1829 mm)
Alignment height	All lock positions		
Runway width	24 in. (609 mm)		
Tread width			
Min. inside	40 in. (1016 mm)		
Max. outside	88 in. (2235 mm)		
Air pressure	90-150 psi (6.2-10.3 bar)*		
Speed	55 seconds (raise), 25 seconds (descent)		

* 125 psi required for full jack capacity

Models

	RX12KIS RX10KIS	RX12KPS RX10KPS	RX12K RX10K
Fully Integrated Alignment	✓	✓	
Inflation Station	✓		
PowerSlide® slipplates & turnplates	✓	✓	
Stainless steel turnplates			✓
Two 6,000-lb. Swing Air Jacks	✓	✓	✓
Flush-mount	Add F to any RX model number (ex. RX10KF)		
Long-deck (RX10 models only)	Add L to any RX10 model number (ex. RX10KLIS)		



The Hunter RX10K and RX12K Series Scissor Lifts have been certified under the program conducted by Automotive Lift Institute (ALI) to comply with Safety Standard ANSI/ALI ALCTV and Electrical Standard UL 201.


Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and WinAlign are registered trademarks of Hunter Engineering Company. The PowerSlide logo is a trademark of Hunter Engineering Company.

0418BH

Copyright © 2018, Hunter Engineering Company

RX10K Plan View

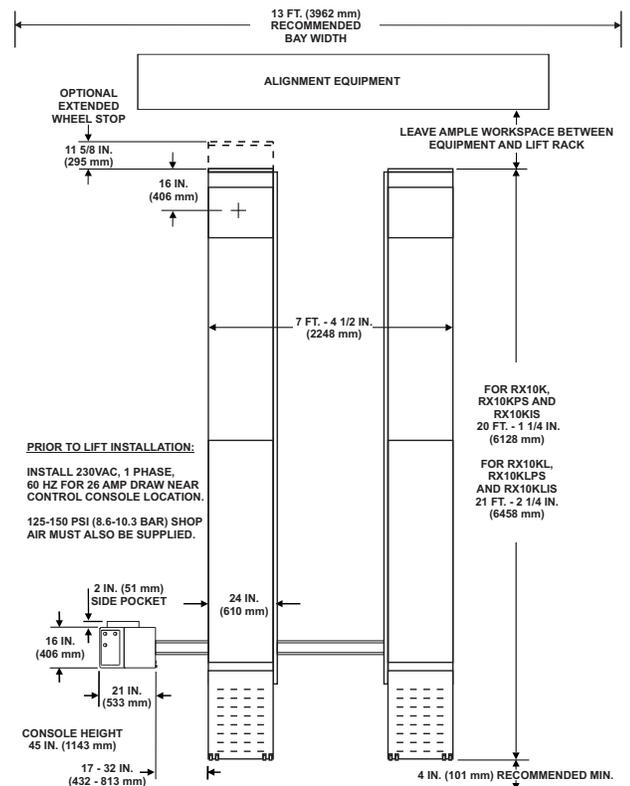

See your Hunter Sales Representative for details on site requirement.



Be sure to check out other Hunter literature for more quality products from Hunter Engineering.

HUNTER

Engineering Company

www.hunter.com

Form 7472-T, 04/18
Supersedes form 7472-T, 03/18