

RX10 K & KL (STD, PS & IS)

Surface Mount Lift Rack



SPECIFICATIONS []




RX10KLIS

Power Requirements	208-230 VAC, single phase power, 26 Amp	
Air Supply Requirements	130 - 150 psi (9 - 10.3 bar)	
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 psi (20,700 kPa) rating	
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)	
Max Vehicle Weight	10,000 lbs. (4500 kg)	
Alignment Height	All lock positions	
Min. Four-Wheel Alignment	88 in. (2235 mm)	
Lifting Speed	1 speed, 55 seconds	
Lowering Speed	2 speed, 25 seconds	
Max Wheelbase	RX10K	RX10KL
General Service	171 in. (4343 mm)	184 in. (4673 mm)
Two-Wheel Alignment	166 in. (4216 mm)	179 in. (4547 mm)
Four-Wheel Alignment	158 in. (4013 mm)	158 in. (4013 mm)

Feature	std	PS	IS
6000-lb Swing Air Jacks (2)	✓	✓	✓
Two-Speed Lowering	✓	✓	✓
FIA Fully Integrated Alignment		✓	✓
POWER SLIDE		✓	✓
INFLATION STATION			✓

Dimension	
Length (L)	
All RX10K Models	241.25 in. (6128 mm)
All RX10KL Models	254.25 in. (6458 mm)
Elevated Length (L2)	
All RX10K Models	217.25 in. (5518 mm)
All RX10KL Models	230.25 in. (5848 mm)
Outside Width (W1)	88.5 in. (2248 mm)
Inside Width (W2)	40 in. (1016 mm)
Runway Width (R)	24 in. (610 mm)
Raised Height (H1)	72 in. (1829 mm)
Depth (H2)	8.75 in. (222 mm)

Options	Add Length	Kit #
Approach Ramp Extensions (Back)	17.75 in. (451 mm)	20-3113-1
Approach Ramp Extensions (Back)	50 in. (1270 mm)	20-2189-1
Conventional Sensor Extensions (Front)	12 in. (305 mm)	20-2497-1
Drive-Thru Kit (Front)	53 in. (1346 mm)	20-2498-1

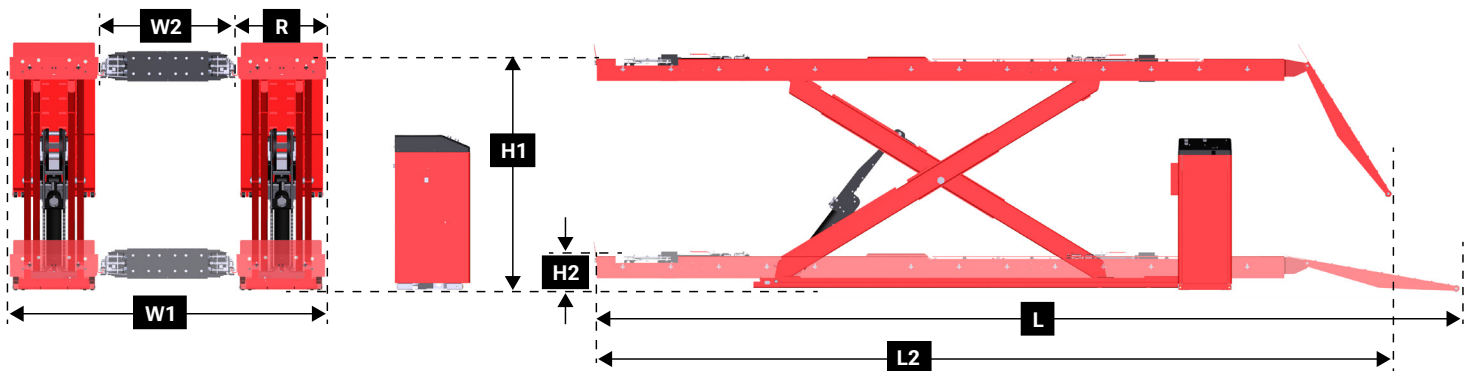

For lift rack information visit:
hunter.com/alignment-racks

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.


Form RS07481-00, 08-24
Supersedes Form 7481-T, 03-18b
Copyright ©2024, Hunter Engineering Company

RX10 K & KL (STD, PS & IS)

Surface Mount Lift Rack



LAYOUT DIAGRAM

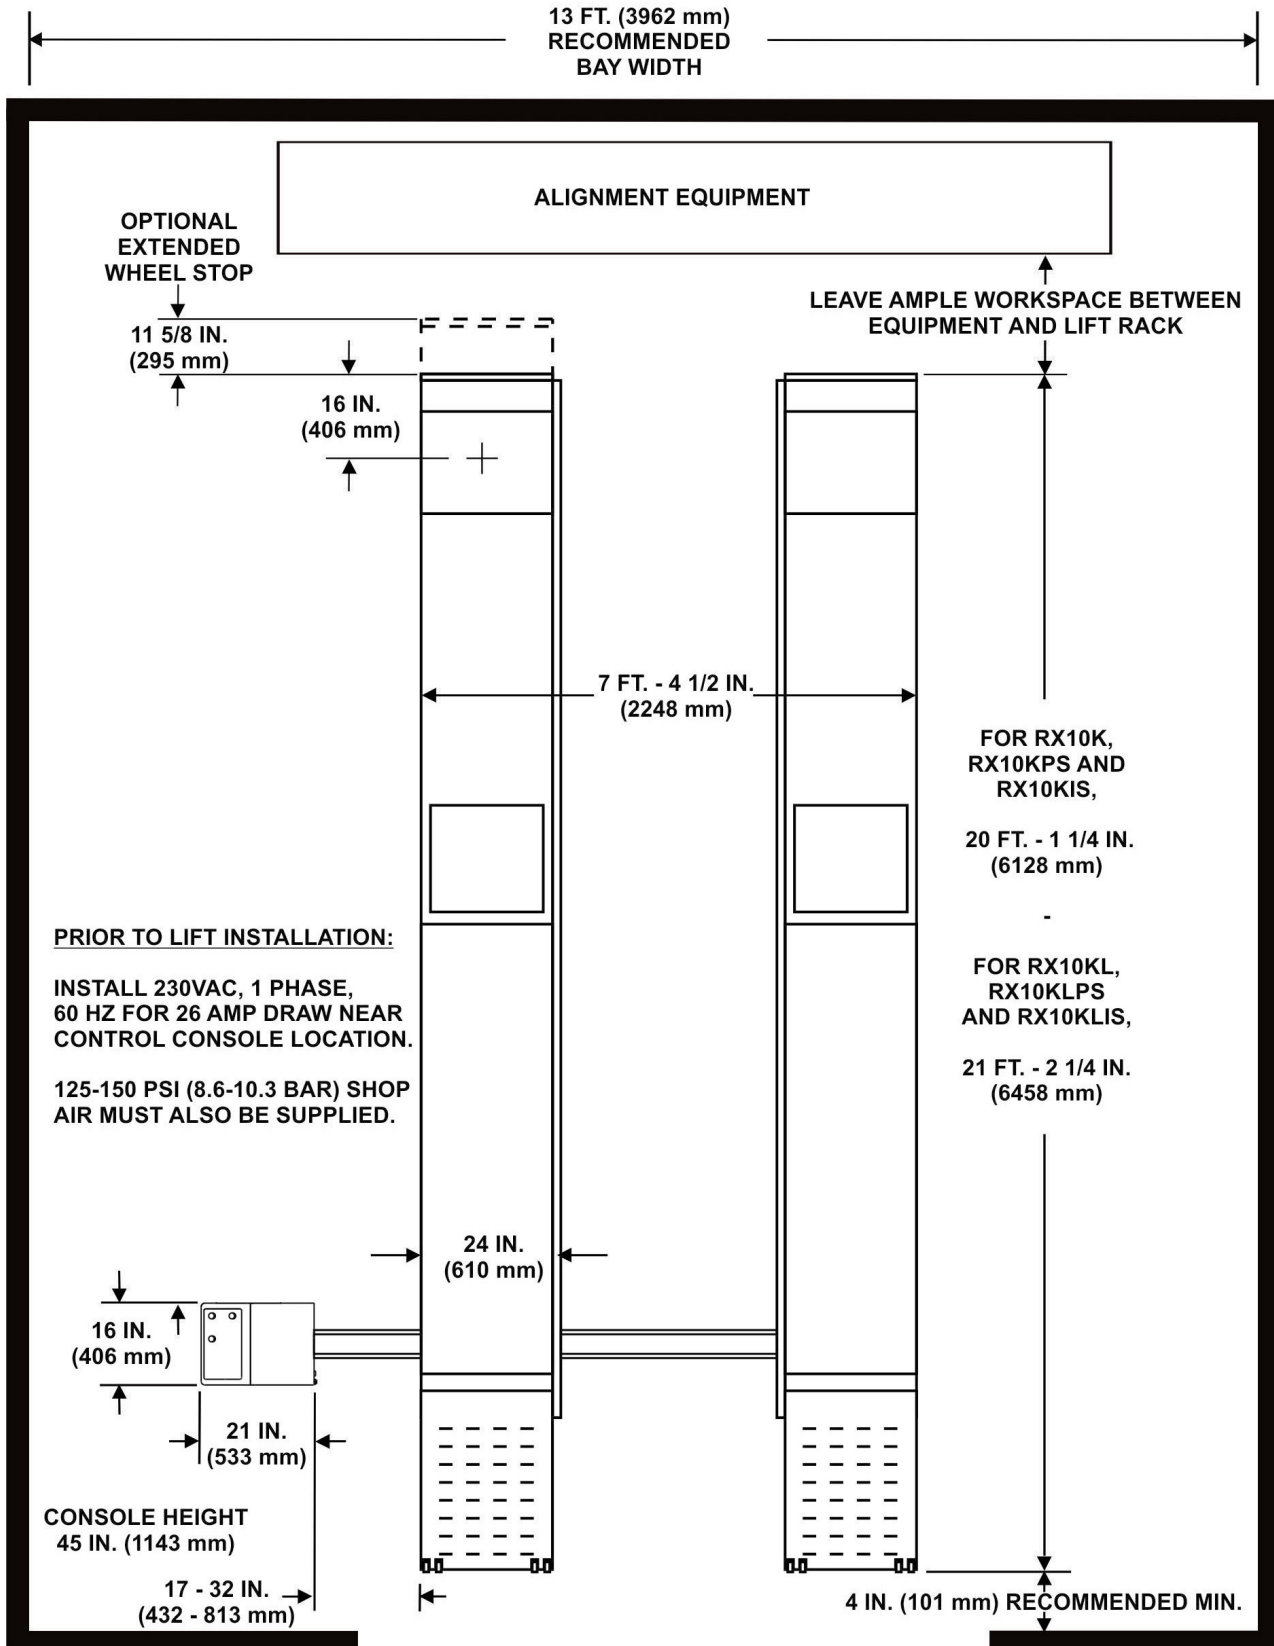

* Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 16 1/2 feet (5029 mm) at the turnplate end. Additional threshold will be required (refer to Installation Instruction for details).