


# RX10 KF & KFPS

Flush Mount Lift Rack

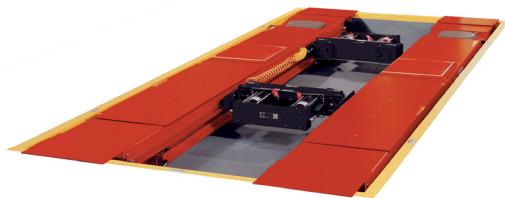


**HUNTER**  
Engineering Company

## SPECIFICATIONS [ ]




**RX10KFPS**

Floor Pocket Requirements	Refer to 7477-T for details
Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	130 - 150 psi (9 - 10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 psi (20,700 kPa) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)
Max Vehicle Weight	10,000 lbs. (4500 kg)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed, 55 seconds
Lowering Speed	2 speed, 25 seconds
Max. Wheelbase	
General Service	167 in. (4241 mm)
Two-Wheel Alignment	162 in. (4115 mm)
Four-Wheel Alignment	158 in. (4013 mm)

Feature	KF	KFPS
6000-lb Swing Air Jacks (2)	✓	✓
Two-Speed Lowering	✓	✓
		✓
		✓
		

	Dimension
Outside Width (W1)	88.5 in. (2248 mm)
Inside Width (W2)	40 in. (1016 mm)
Length (L)	215.375 in. (5471 mm)
Runway Width (R)	24 in. (610 mm)
Raised Height (H1)	72 in. (1829 mm)
Depth (H2)	9.25 - 10.25 in. (235 - 260 mm)

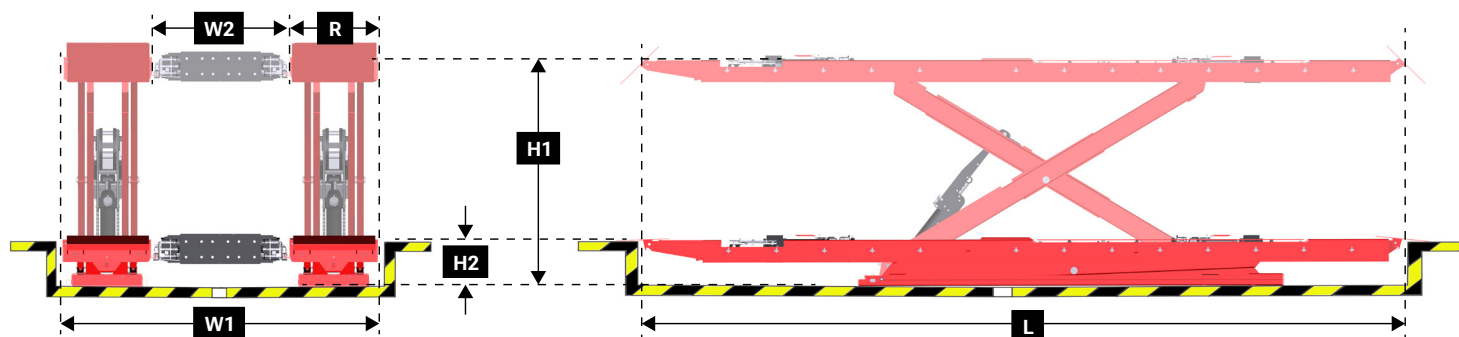

For lift rack information visit:  
[hunter.com/alignment-racks](http://hunter.com/alignment-racks)

For local contact visit:  
[hunter.com/contact](http://hunter.com/contact)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.


Form RS07482-00, 08-24  
Supersedes Form 7482-T, 03-18b  
Copyright ©2024, Hunter Engineering Company

# RX10 KF & KFPS

Flush Mount Lift Rack



## LAYOUT DIAGRAM (refer to 7477-T for construction drawings)

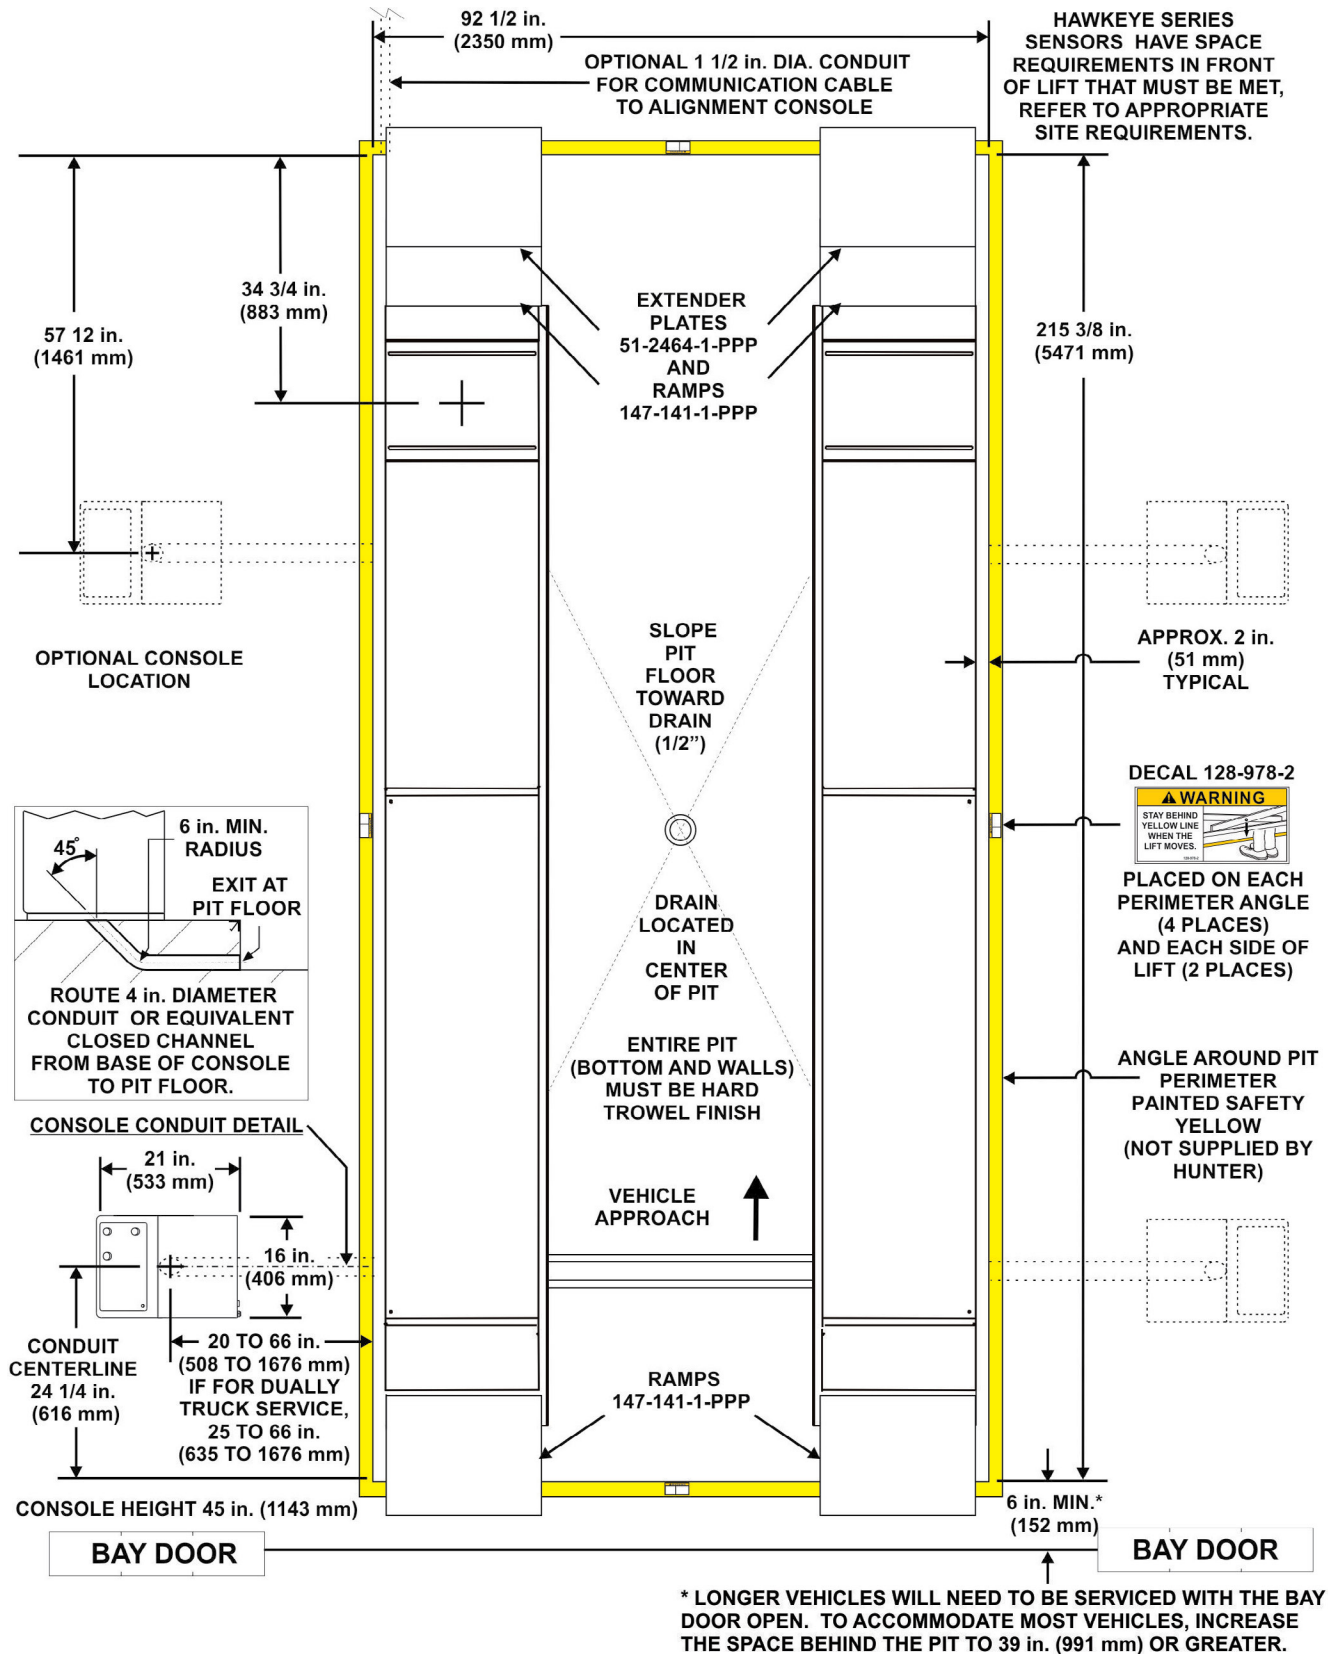

Dimensions shown are for end result. Tile thickness (if applicable) must be considered before pouring concrete. Positioning of control console is limited to a maximum space between console and rack of 5 1/2 feet (1676 mm) at the approach ramp end and 16 feet (4877 mm) at the turnplate end.