

RX45 K & KL (STD, PS & IS)

Surface Mount Lift Rack



SPECIFICATIONS []




RX45KIS-215E (Jacks Optional)

| Power Requirements | | |
|---------------------------|--|-------------------|
| 215E | 200/208/230 VAC, 1 phase, 50Hz, 26 Amp | |
| 216E | 200/208/230 VAC, 1 phase, 60Hz, 26 Amp | |
| 435E | 208/230/400/460 VAC, 3 phase, 50Hz, 18 Amp (208/230) / 9 Amp (400/460) | |
| Air Supply Requirements | | |
| Air Supply Requirements | 130 - 150 psi (9 - 10.3 bar) | |
| Minimum Concrete Spec. | 3 in. (76 mm) thick, 3000 psi (20,700 kPa) rating | |
| Maximum Floor Slope | 2 in. (51 mm) over 126 in. (3200 mm) | |
| Max Vehicle Weight | 10,000 lbs. (4500 kg) | |
| Alignment Height | All lock positions | |
| Min. Four-Wheel Alignment | 88 in. (2235 mm) | |
| Lifting Speed | 1 speed, 55 seconds | |
| Lowering Speed | 2 speed, 25 seconds | |
| Max Wheelbase | RX45K | RX45KL |
| General Service | 171 in. (4343 mm) | 184 in. (4673 mm) |
| Two-Wheel Alignment | 166 in. (4216 mm) | 179 in. (4547 mm) |
| Four-Wheel Alignment | 158 in. (4013 mm) | 158 in. (4013 mm) |

| Feature | PS | IS |
|---------------------------------------|------|------|
| 6000-lb Swing Air Jacks (2) | opt. | opt. |
| Two-Speed Lowering | ✓ | ✓ |
| FIA Fully Integrated Alignment | ✓ | ✓ |
| POWER SLIDE | ✓ | ✓ |
| INFLATION STATION | | ✓ |

| Dimension | |
|--------------------|----------------------|
| Length (L) | |
| All RX45K Models | 241.25 in. (6128 mm) |
| All RX45KL Models | 254.25 in. (6458 mm) |
| Deck Length (DL) | |
| All RX45K Models | 191.5 in. (4864 mm) |
| All RX45KL Models | 204.5 in. (5194 mm) |
| Outside Width (W1) | 88.5 in. (2248 mm) |
| Inside Width (W2) | 40 in. (1016 mm) |
| Runway Width (R) | 24 in. (610 mm) |
| Raised Height (H1) | 72 in. (1829 mm) |
| Depth (H2) | 8.75 in. (222 mm) |

| Options | Add Length | Kit # |
|--|--------------------|-----------|
| Approach Ramp Extensions (Back) | 17.75 in. (451 mm) | 20-3113-1 |
| Approach Ramp Extensions (Back) | 50 in. (1270 mm) | 20-2189-1 |
| Conventional Sensor Extensions (Front) | 12 in. (305 mm) | 20-2497-1 |
| Drive-Thru Kit (Front) | 53 in. (1346 mm) | 20-2498-1 |

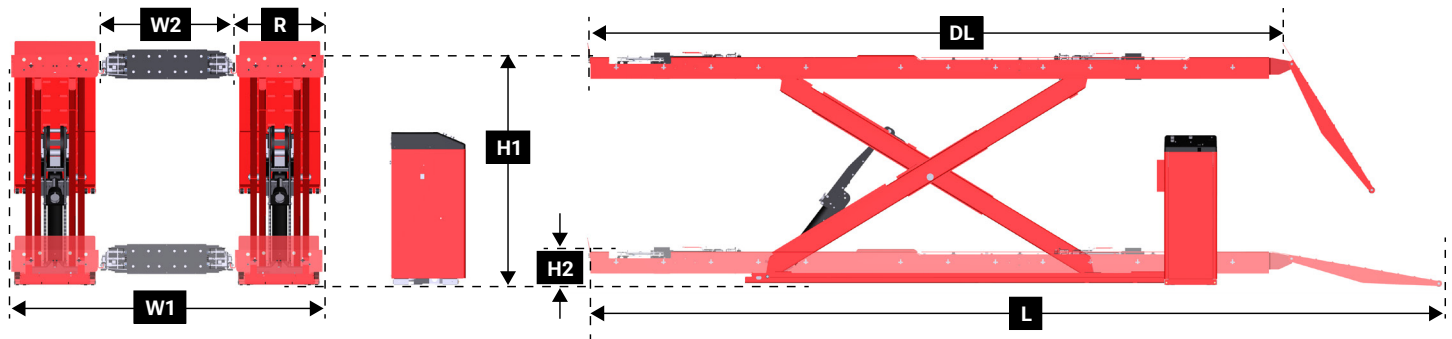

For lift rack information visit:
hunter.com/alignment-racks

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.


Form RS07516-05, 08-24
Supersedes Form 7516-TE, 04-18b
Copyright ©2024, Hunter Engineering Company

RX45 K & KL (STD, PS & IS)

Surface Mount Lift Rack



LAYOUT DIAGRAM

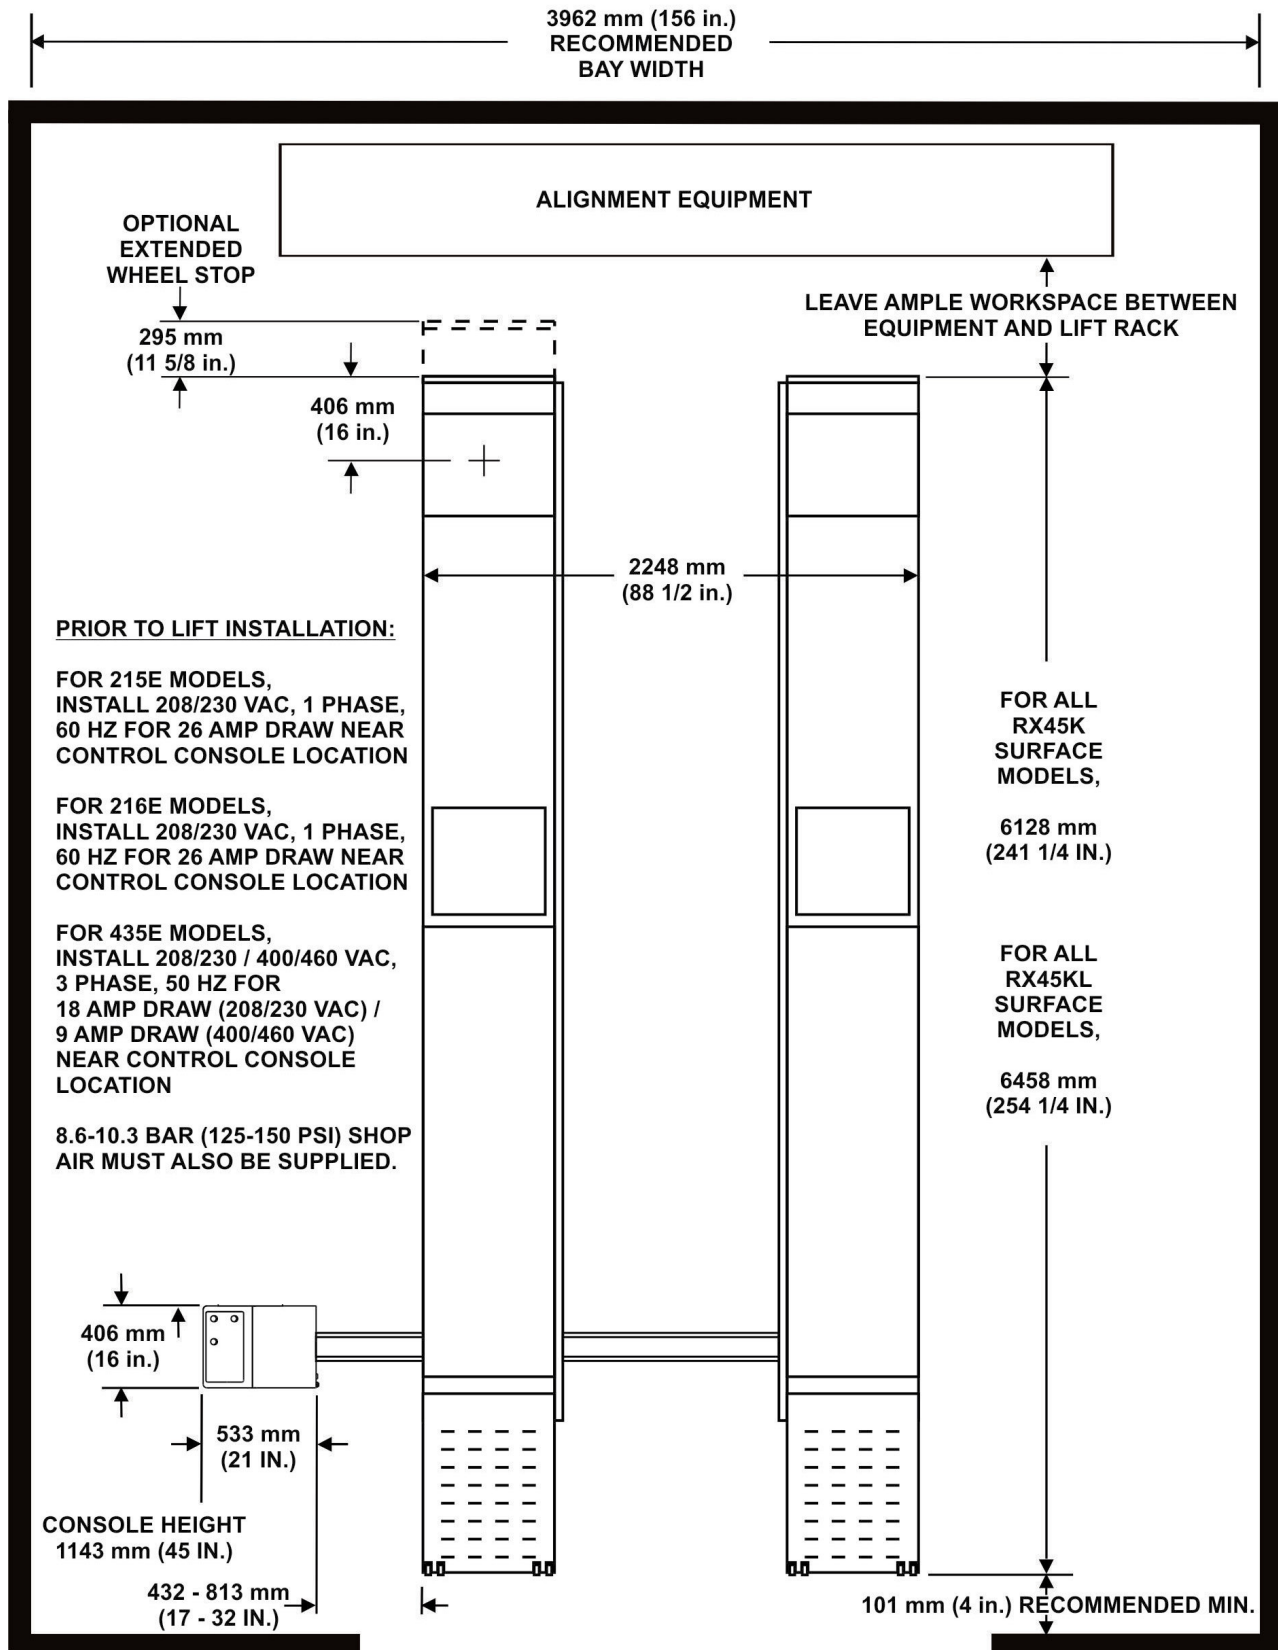

* Non-standard positioning of control console is limited to a maximum space between console and rack of 72 in. (1829 mm) at the approach ramp end and 198 in. (5029 mm) at the turnplate end. Additional threshold will be required (refer to Installation Instruction for details).