

# RX45 K & KL (STD, PS & IS)

Surface Mount Lift Rack



## SPECIFICATIONS [ ]




RX45KIS-215E (Jacks Optional)

Power Requirements		
215E	200/208/230 VAC, 1 phase, 50Hz, 26 Amp	
216E	200/208/230 VAC, 1 phase, 60Hz, 26 Amp	
435E	208/230/400/460 VAC, 3 phase, 50Hz, 18 Amp (208/230) / 9 Amp (400/460)	
Air Supply Requirements		
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 psi (20,700 kPa) rating	
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)	
Max Vehicle Weight	10,000 lbs. (4500 kg)	
Alignment Height	All lock positions	
Min. Four-Wheel Alignment	88 in. (2235 mm)	
Lifting Speed	1 speed, 55 seconds	
Lowering Speed	2 speed, 25 seconds	
Max Wheelbase	RX45K	RX45KL
General Service	171 in. (4343 mm)	184 in. (4673 mm)
Two-Wheel Alignment	166 in. (4216 mm)	179 in. (4547 mm)
Four-Wheel Alignment	158 in. (4013 mm)	158 in. (4013 mm)

Feature	PS	IS
6000-lb Swing Air Jacks (2)	opt.	opt.
Two-Speed Lowering	✓	✓
<b>FIA</b> Fully Integrated Alignment	✓	✓
<b>POWER SLIDE</b>	✓	✓
<b>INFLATION STATION</b>		✓

Dimension	
Length (L)	
All RX45K Models	241.25 in. (6128 mm)
All RX45KL Models	254.25 in. (6458 mm)
Deck Length (DL)	
All RX45K Models	191.5 in. (4864 mm)
All RX45KL Models	204.5 in. (5194 mm)
Outside Width (W1)	88.5 in. (2248 mm)
Inside Width (W2)	40 in. (1016 mm)
Runway Width (R)	24 in. (610 mm)
Raised Height (H1)	72 in. (1829 mm)
Depth (H2)	8.75 in. (222 mm)

Options	Add Length	Kit #
Approach Ramp Extensions (Back)	17.75 in. (451 mm)	20-3113-1
Approach Ramp Extensions (Back)	50 in. (1270 mm)	20-2189-1
Conventional Sensor Extensions (Front)	12 in. (305 mm)	20-2497-1
Drive-Thru Kit (Front)	53 in. (1346 mm)	20-2498-1

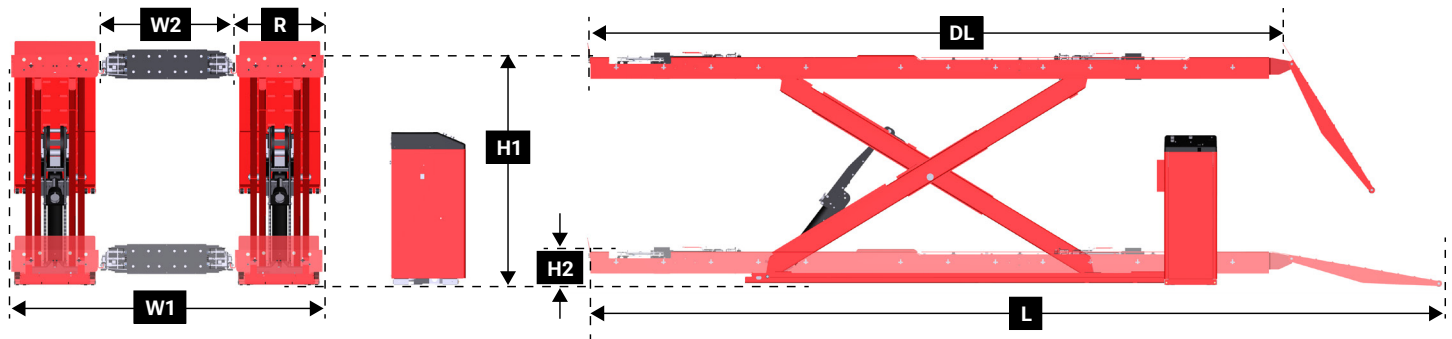

For lift rack information visit:  
[hunter.com/alignment-racks](http://hunter.com/alignment-racks)

For local contact visit:  
[hunter.com/contact](http://hunter.com/contact)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call **800-448-6848**

Because of continuing technological advancements, specifications, models and options are subject to change without notice.


Form RS07516-05, 08-24  
Supersedes Form 7516-TE, 04-18b  
Copyright ©2024, Hunter Engineering Company

# RX45 K & KL (STD, PS & IS)

Surface Mount Lift Rack



## LAYOUT DIAGRAM

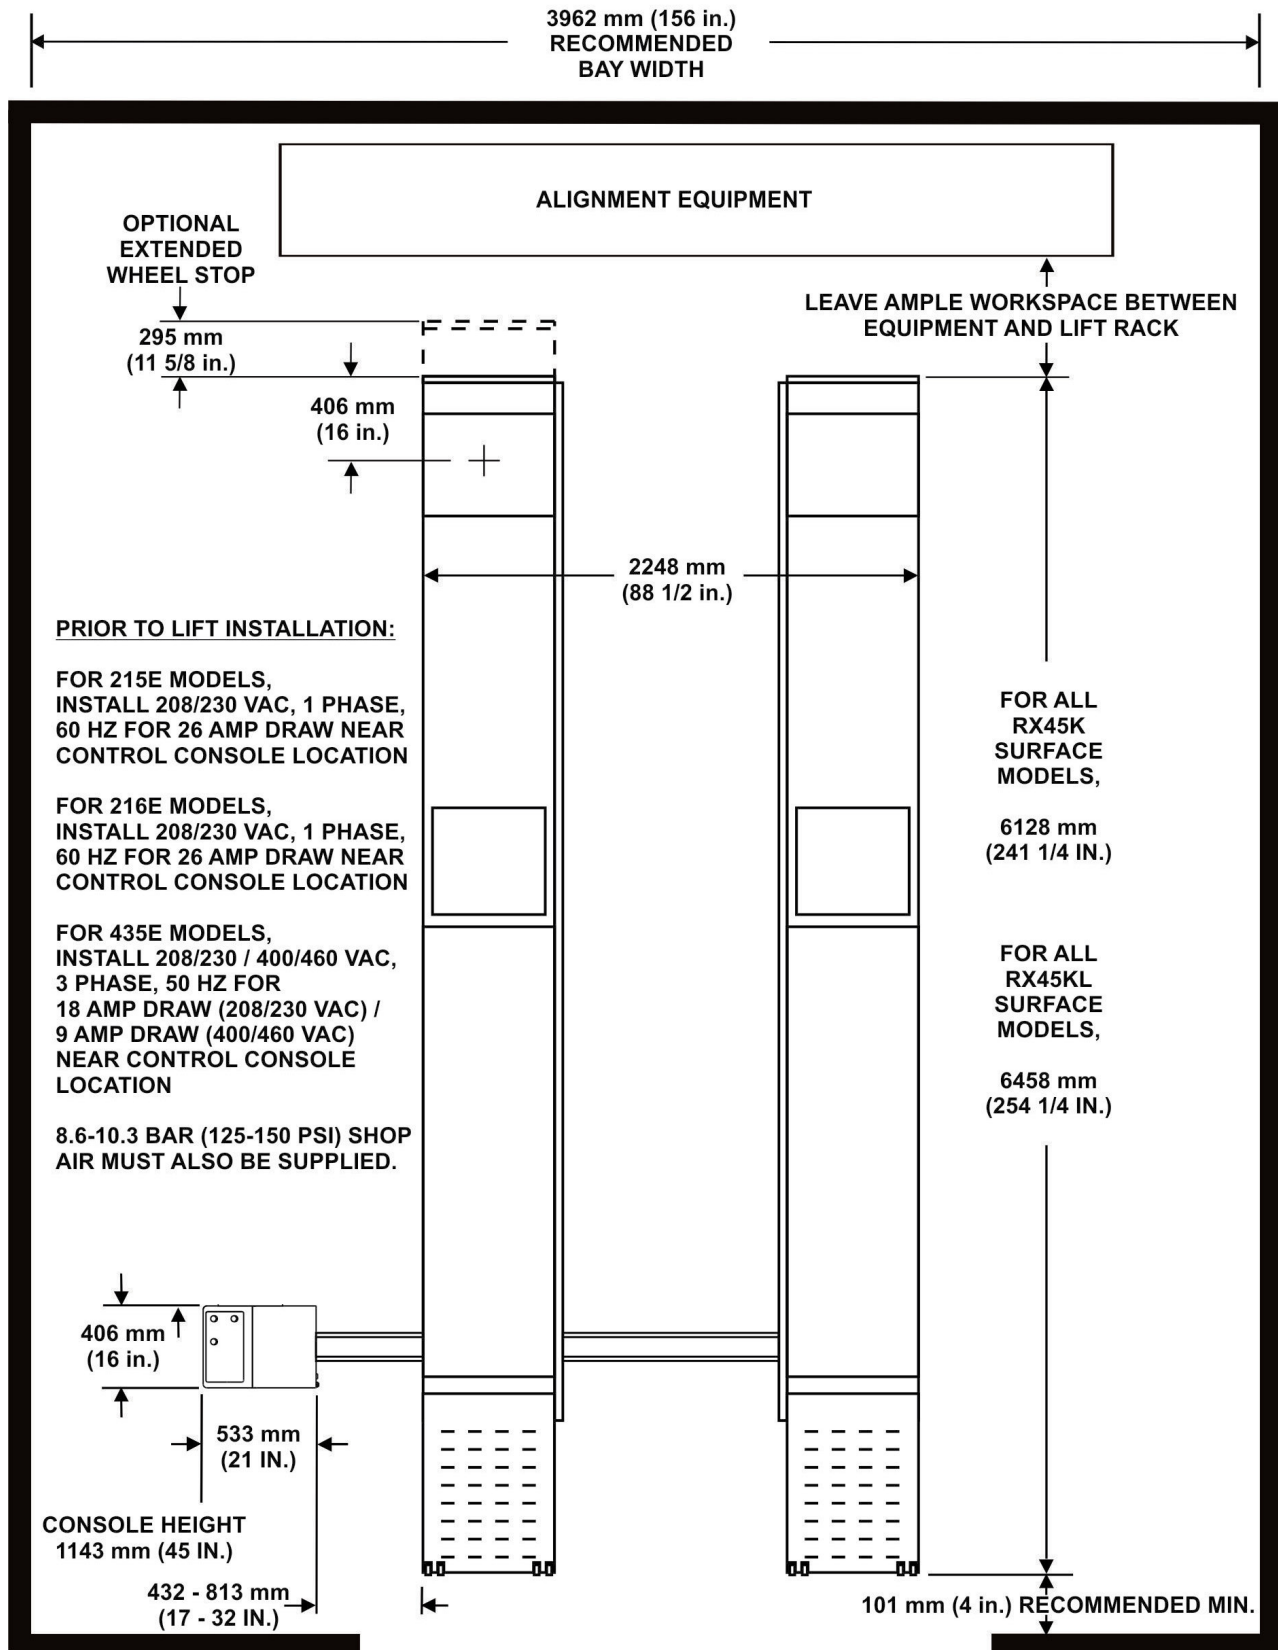

\* Non-standard positioning of control console is limited to a maximum space between console and rack of 72 in. (1829 mm) at the approach ramp end and 198 in. (5029 mm) at the turnplate end. Additional threshold will be required (refer to Installation Instruction for details).