


RX45KLFIS

Flush Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS []

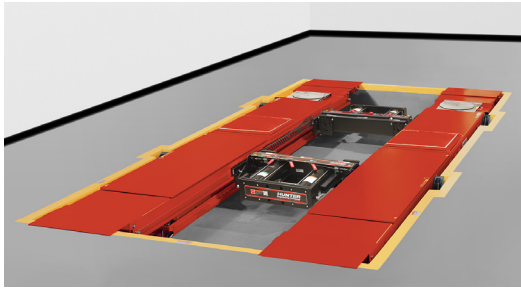


RX45KLFIS (Jacks Optional)

| | |
|----------------------------------|--|
| Floor Pocket Requirements | Refer to 7508-TE-05 for details |
| Power Requirements | |
| 215E | 200/208/230 VAC, 1 phase, 50Hz, 26 Amp |
| 216E | 200/208/230 VAC, 1 phase, 60Hz, 26 Amp |
| 435E | 208/230/400/460 VAC, 3 phase, 50Hz, 18 Amp (208/230) / 9 Amp (400/460) |
| Air Supply Requirements | 130 - 150 psi (9 - 10.3 bar) |
| Minimum Concrete Spec. | 3 in. (76 mm) thick, 3000 psi (20,700 kPa) rating |
| Maximum Floor Slope | 2 in. (51 mm) over 126 in. (3200 mm) |
| Max Vehicle Weight | 10,000 lbs. (4500 kg) |
| Alignment Height | All lock positions |
| Min. Four-Wheel Alignment | 88 in. (2235 mm) |
| Lifting Speed | 1 speed, 55 seconds |
| Lowering Speed | 2 speed, 25 seconds |
| Max. Wheelbase | |
| General Service | 180 in. (4572 mm) |
| Two-Wheel Alignment | 175 in. (4445 mm) |
| Four-Wheel Alignment | 158 in. (4013 mm) |

| Feature | std. | opt. |
|---------------------------------------|------|------|
| 6000-lb Swing Air Jacks (2) | | opt. |
| Two-Speed Lowering | ✓ | |
| FIA Fully Integrated Alignment | ✓ | |
| POWER SLIDE | ✓ | |
| INFLATION STATION | ✓ | |

| Dimension | |
|-----------------------------|---------------------------------|
| Outside Width (W1) | 88.5 in. (2248 mm) |
| Inside Width (W2) | 40 in. (1016 mm) |
| Length (L) | 228.375 in. (5801 mm) |
| Deck Length (DL) | 213.5 in. (5423 mm) |
| Runway Width (R) | 24 in. (610 mm) |
| Raised Height (H1) | 72 in. (1829 mm) |
| Stack Height (H2) | 9.25 - 10.25 in. (235 - 260 mm) |

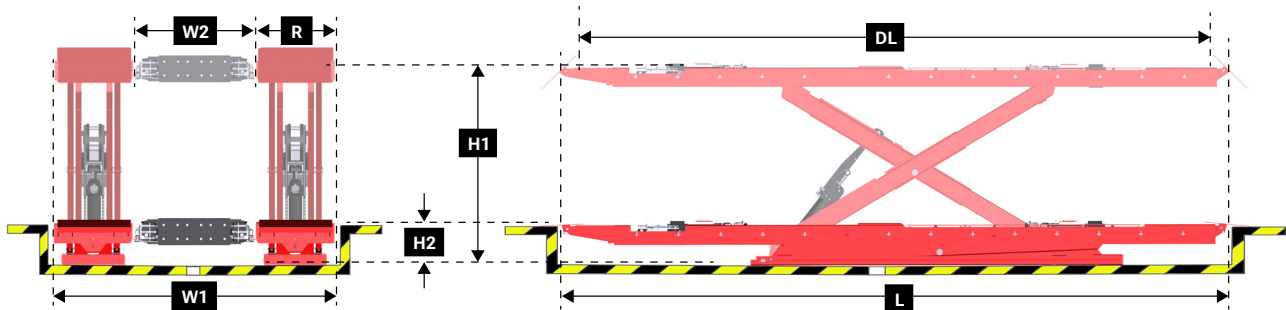

For lift rack information visit:
hunter.com/alignment-racks

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.


Form RS07520-05, 08-24
Supersedes Form 7520-TE, 04-18a
Copyright ©2024, Hunter Engineering Company

RX45KLFIS

Flush Mount Lift Rack



LAYOUT DIAGRAM (refer to 7509-TE-05 for construction drawings)

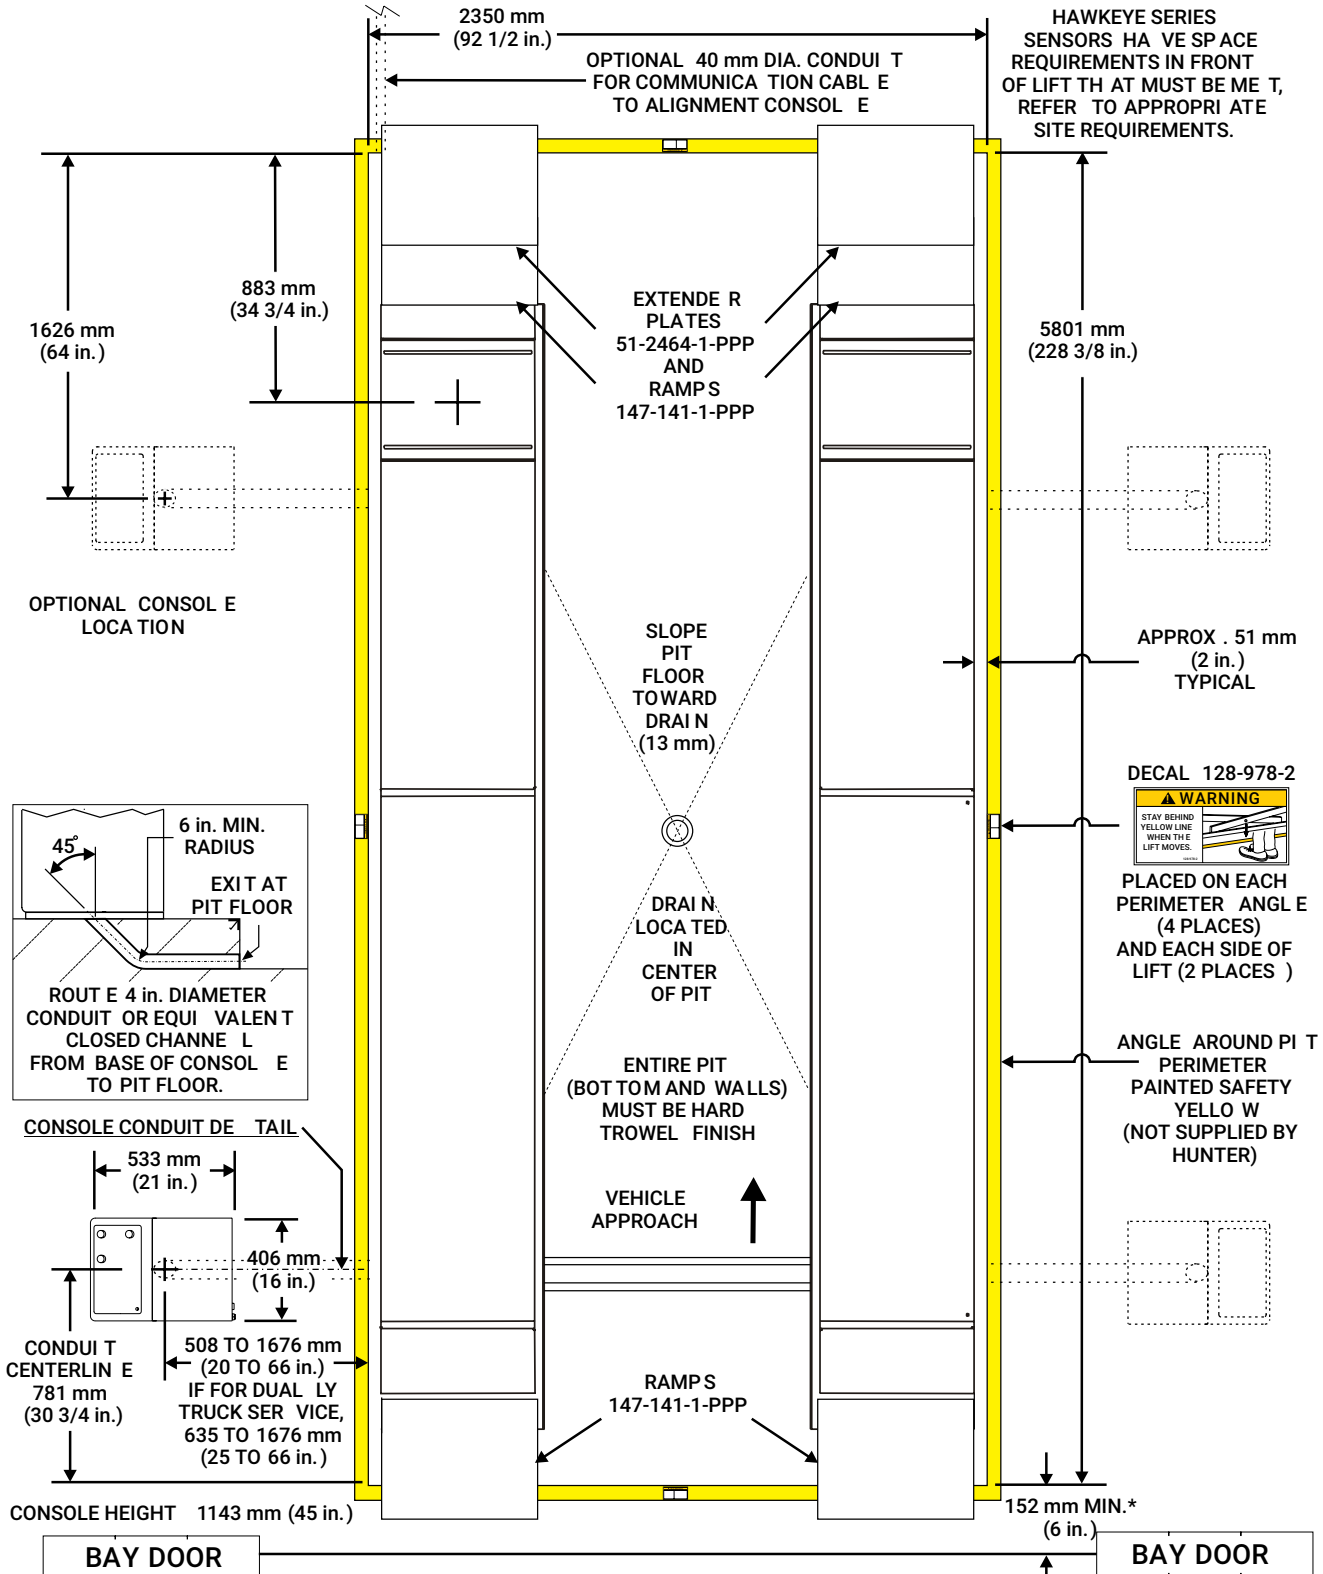

* LONGER VEHICLES WILL NEED TO BE SERVICED WITH THE BAY DOOR OPEN. TO ACCOMMODATE MOST VEHICLES, INCREASE THE SPACE BEHIND THE PIT TO 991 mm (39 in.) OR GREATER.

Dimensions shown are for end result. Tile thickness (if applicable) must be considered before pouring concrete. Positioning of control console is limited to a maximum space between console and rack of 1676 mm (66 in.) at the approach ramp end and 4877 mm (192 in.) at the turnplate end.