

# STANDARD ALIGNMENT

*Optimized for speed and efficiency*

**NEW**



Defining the Standard



Fast alignment  
readings



Capable WinAlign®  
Lite software



High durability,  
high uptime



Comprehensive  
vehicle coverage



## ALIGNMENT MEASUREMENTS IN JUST MINUTES

Standard alignment systems using HawkEye® digital imaging technology offers shops alignment service optimized for speed and efficiency with simple operation and low cost of ownership.

Digital cameras measure the position and orientation of the wheels with pinpoint accuracy using reflective targets.

## Select the vehicle

- ✓ Recall specifications




## Measure angles

- ✓ Install targets
- ✓ Capture measurements
- ✓ Review "before" results



## Make adjustments

- ✓ Follow the adjustment instructions
- ✓ Print before-and-after results

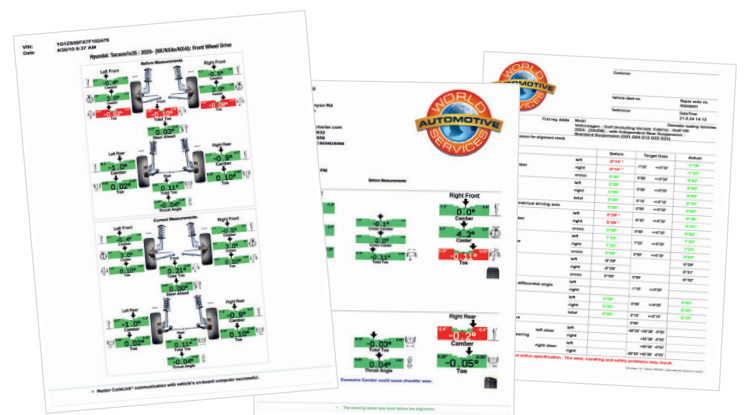

## Present your results

- ✓ Sell more alignments
- ✓ Generate greater profits





*Camera height is easily adjusted from the side of the unit.*

## Perform alignments at ANY height

The versatility of the HawkEye® digital imaging technology allows shops to perform alignments on the floor or at any lift height.



### **PATENTED**

## Reduce long-term cost of ownership


The reflective wheel targets provide a low cost of ownership and require virtually no maintenance.

- ✓ No electronics at the wheel
- ✓ No cables or batteries
- ✓ No downtime from accidental drops



*Increase productivity*


# POWERFUL SOFTWARE FEATURES

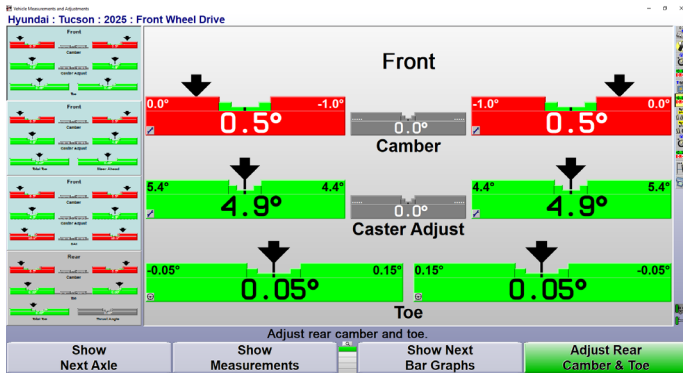

## STANDARD

### Live Bar Graph Measurements


See live measurements and perform adjustments with ease using large, color coded bar graphs in standard and customizable views.

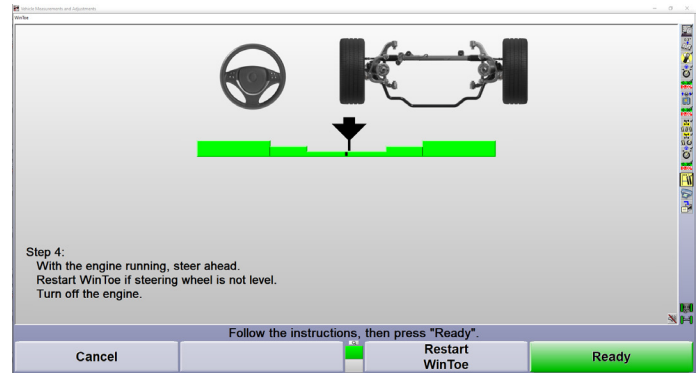

## EXCLUSIVE

### WinToe® adjustments


Ensure a straight steering wheel every time without repeated adjustments or using a steering wheel holder.

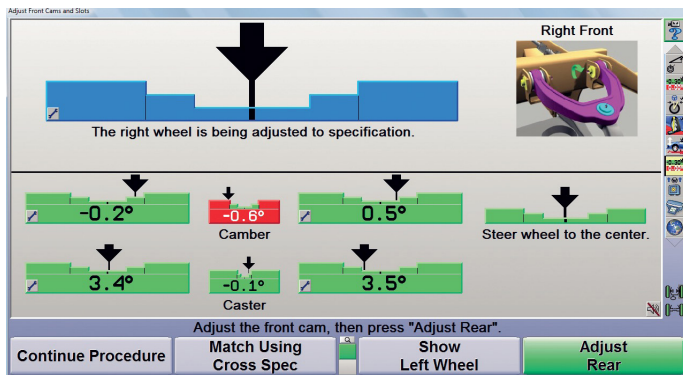

## STANDARD

### Power tools

Advanced adjustments made easy with built in Power Tools to guide the way for control arms, bushings, shims, and wheel off adjustments.

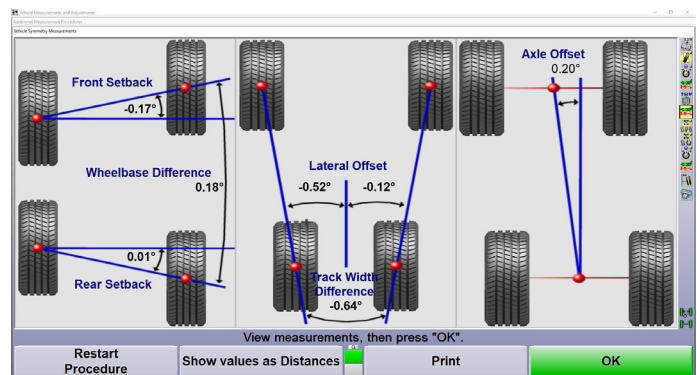

## STANDARD


### Advanced Measurements


Get a full picture of the vehicle's wheelbase and track width measurements plus wheelbase setbacks and track width offsets to properly diagnose and align vehicles.




Reduce time and save time and effort

# STREAMLINE THE PROCESS

 1 trip around vehicle

 0 trips to console

 72 total steps

 70 seconds

**FIA** Fully Integrated Alignment



1

**INFLATION  
STATION** 

4

3

**POWER  
SLIDE™** 

## 1 RX scissor lift console

Raising the vehicle triggers the sensors to look for wheel targets.

## 2 WinAlign® console

Communicates directly with lift to set tire pressure and automatically operate turnplates and slip plates.

## 3 PowerSlide® system

Slip plates and turnplates automatically lock and unlock at the appropriate times.

## 4 Inflation Station™

Automatically inflate all four tires simultaneously.

# GREATER VERSATILITY HELPS SERVICE MORE VEHICLES


## Hunter's innovative self-centering wheel adaptor

- ✓ Easy to use
- ✓ Lightweight, durable construction
- ✓ Fits a wide range of wheel configurations and sizes




### Adaptable rim studs

Fits steel or specialty rims with run-flat and flange-guard tires.




### Sturdy design

Durable, lightweight design provides rigidity and stability.



### Extended range

Stud slots extend coverage from 10 to 24.5 inches.

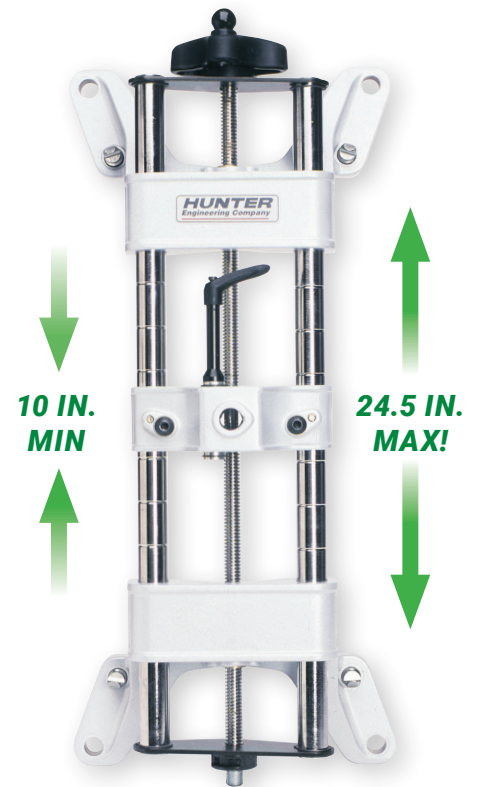

## EXTEND RANGE OF SERVICE WITH THESE OPTIONS

### OPTIONAL

#### Tire clamp adaptor fits difficult wheels

- ✓ Fastens to tires with 21 to 40 in. outside dimension
- ✓ Includes 4 tire clamps with protective rim sleeves



*Ideal for use on wheels without rim lips or when space between tire and rim is limited.*

### OPTIONAL

#### Extensions expand coverage

- ✓ Expands adaptor range up to 28 in.
- ✓ Includes 16 adaptor extensions, 4 for each adaptor





Find the right package for every shop

# CONFIGURATION OPTIONS

## Standard equipment

- ✓ Wireless handheld remote control and receiver
- ✓ Brake pedal depressor
- ✓ Steering wheel holder
- ✓ Integrated speaker
- ✓ Accessory storage bracket

## Specifications

Track width	80 in. front, 112 in. rear
Wheelbase	210 in.
Power requirements	100-240V, 10A, 50/60Hz



	LITE-CM	LITE-ML
LITE alignment software	✓	✓
High-definition targets	✓	✓
Windows® PC	✓	✓
24-in. LCD flat panel display	✓	✓
Rolling Console (with color printer)	✓	✓
Sensors (2-camera, manual-lift)	Cabinet-mounted Allows multi-bay use	Floor-mounted

## Options and Accessories



**Barcode Scanner**  
20-2900-1

Recall OE specs and vehicle-specific alignment procedures instantly.



**CodeLink®**  
20-2813-1

Perform steering system resets for supported vehicles.



**Wireless Remote Indicator**  
20-2882-1

See adjustments live when working under the vehicle rear.



**HawkEye® HS221  
Sensor Series**


Scan here for  
specs, features and  
measurements

# TAKE CONTROL OF YOUR EQUIPMENT, NUMBERS, AND PROFITABILITY



## Connect your equipment to your business

- ✓ Maximize your shop's performance
- ✓ Simplify customer discussions with selling tools
- ✓ View extensive undercar information
- ✓ Easily download newly released or revised vehicle alignment specifications with WebSpecs®

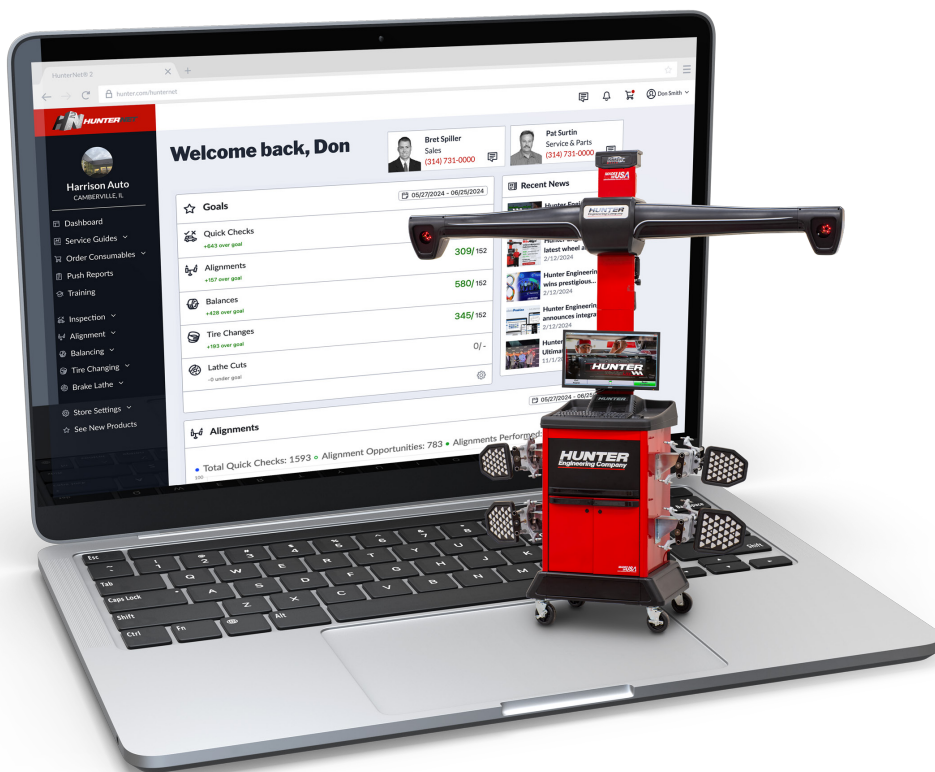

## Your local Hunter team is ready to help

- ✂ Receive same- or next-day service
- 📞 Get a free quote or on-site demo
- 📅 Register for ASE-accredited training courses
- 🔗 General information and questions



Contact your local team

[hunter.com/contact](https://hunter.com/contact)

Because of continuing technological advances, specifications, models and options are subject to change without notice.

WinAlign, HawkEye, WinToe, PowerSlide, and HunterNet are registered trademarks of Hunter Engineering Company. InflationStation is a trademark of Hunter Engineering Company.

**HUNTER**  
Engineering Company

[www.hunter.com](https://www.hunter.com)