

SPECIFICATIONS / FEATURES / MEASUREMENTS []



HS221:	CM	ML
Sensor Mount Type	Manually Adjustable Mobile Cabinet Mount	Manually Adjustable Single Column Floor Mount
Power Requirements	Supplied by Console	
HD Targets & Self-Centering	✓	✓
Vertical Camera Adjustment	✓	✓
Mobile - Bay-to-Bay	✓	
High Resolution Cameras	✓	✓
Multiple Target Storage Configurations	✓	✓



SPECIFICATIONS	
Weight of Target	11 lbs (5 kg)
Profile of Target	18 in (457 mm)
Installation Time	10 - 15 seconds
Rolling Compensation Style	Back / Forward
Camera Resolution	2,608 x 1,952 10,000,000 px
Track Width	80 in (2032 mm)
Wheel Base	210 in (5334 mm)
Distance to Wall	65 - 97 in (1651 - 2464 mm)
Suggested Distance	97 in (2464 mm)
Short Bay Distance (see site info)	65 in (1651 mm)

MEASUREMENTS	
S.A.I. & Included Angle	✓
Set Back	✓
Max Steering Angle	✓
Wheelbase Difference	To Lock*
Track Width Difference	✓
Tread Width Difference	✓
Lateral Offset	✓
Rear Set Back	✓
Axle Offset	✓

For alignment information visit:
hunter.com/alignment-machines


For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848

DIMENSIONS / WEIGHTS []

HS221:	CM	ML
Width (W)	105 in (2667 mm)	105 in (2667 mm)
Height (H)	105.5 in (2680 mm)	122.5 in (3112 mm)
Depth (D)	25 in (635 mm)	15 in (381 mm)
Vertical Camera Movement Range	60 - 95.5 in (1524 - 2426 mm) from floor	56 - 113.5 in (1422 - 2883 mm) from floor

Vertically Adjustable Manual Lift Camera Sensors

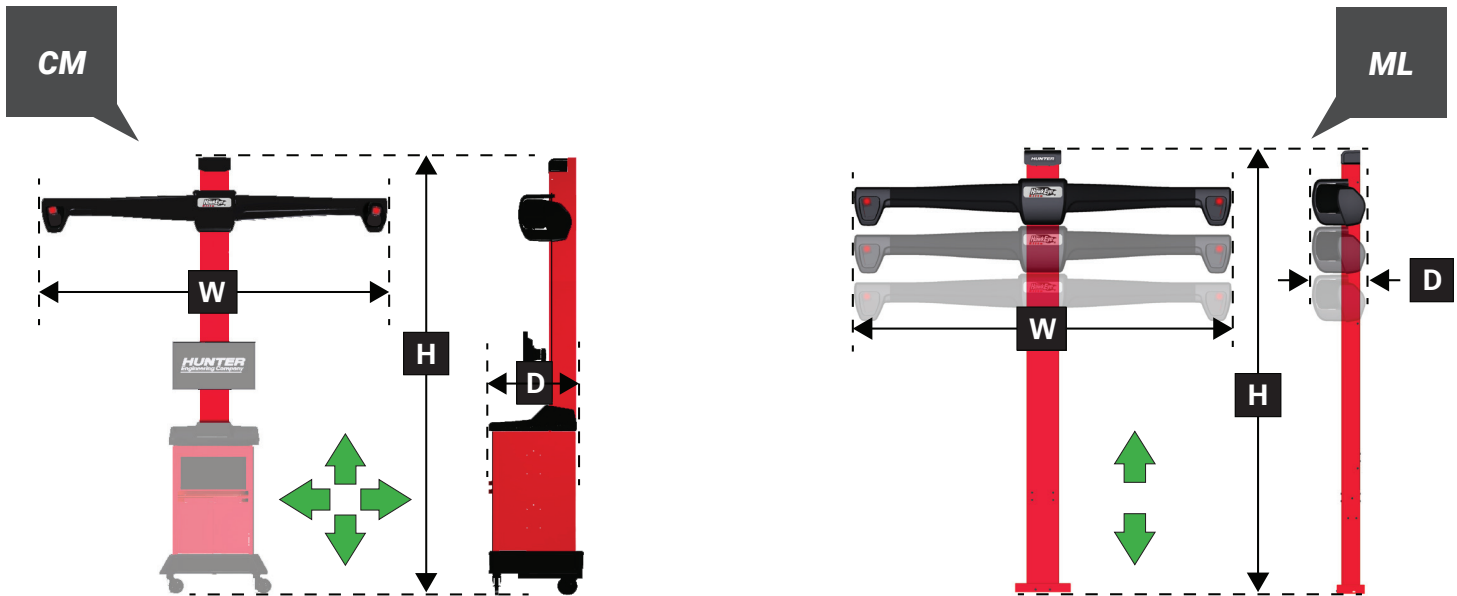


Included with all HS221 Sensors

Wheel Adaptors



Quick-Change Arms



Deep-Wheel Extensions

