
HawkEye XL™: HXL421CM



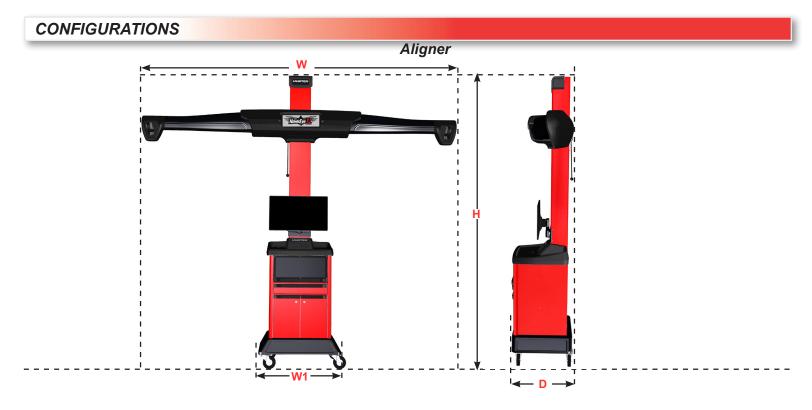

	STANDARD CABINET
LCD Monitor	24, 27 in. Wide-screen LED
Width (W)	134 in. ³⁴⁰³ mm
Height (H)	118 in. 2997 mm
Depth (D)	26 in. 660 mm
Base Width (W1)	33 in. 838 mm

	HXL421CM
Sensor Mount Type	Manual Adjustable Mobile Cabinet Mount
Power Requirements	Supplied by Aligner Cabinet
TDXL Targets	lacksquare
Vertical Camera Adjustment	lacksquare
Mobile - Bay-to-Bay	lacktriangledown
QuickComp	lacktriangle
High Resolution Cameras	Ø
FIA Compatible	lacksquare
Adaptor Hanger Brackets	lacksquare
Multiple Target Storage Configurations	lacktriangle
Customizable Lighted Sign	Ø

^{*}Side doors of Aligner cabinet have optional holes for target holder mounting.

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

For aligner information visit: www.hunter.com/hawkeye-xl

For local contact visit: https://www.hunter.com/contact/

For general inquiries visit: www.hunter.com or call 800-448-6848




HawkEye XL™: HXL421CM



SPECIFICATIONS / ADJUSTMENTS / MEASUREMENTS





SPECIFICATIONS

MEASUREMENTS	
S.A.I. & Included Angle	
Set Back	Ø
Max Steering Angle	To Lock*
Lateral Offset	Ø
Rear Set Back	Ø
Axle Offset	
SBDA	Ø **
Body Angle	Ø **
Body Wheel Offset & Setback	Ø **
Body Roll	Ø **



ADJUSTMENTS		
Way Up Way Out WinToe	⊘ ∗	
Wheel-Off Adjustment	Optional for medium and light duty	

- * Requires optional wide-angle target extensions.
- ** Requires optional Ride Height targets, only supported for two axle, light duty vehicles.

96 in.

700 in.

HXL421CM sensors compatible with WT68x and WA67x cabinets with WinAlign version 18 and newer.

eras to turnplates Recommended maximum distance from cameras to

furthest targets

INCLUDED WITH ALL HXL421CM SENSORS

Self Centering Clamp (Qty 6)



Hangers (Qty 6)



TDXL Targets (Qty 6)



Clamp to Target Adaptor (Qty 4)

Clamp to Target Adaptor with Rear Extensions (Qty 2)



