
## HAWKEYE® XL: HXL421FC

World-class in heavy duty wheel alignment!

# **HUNTER**Engineering Company.

### FIXED COLUMN CONFIGURATION

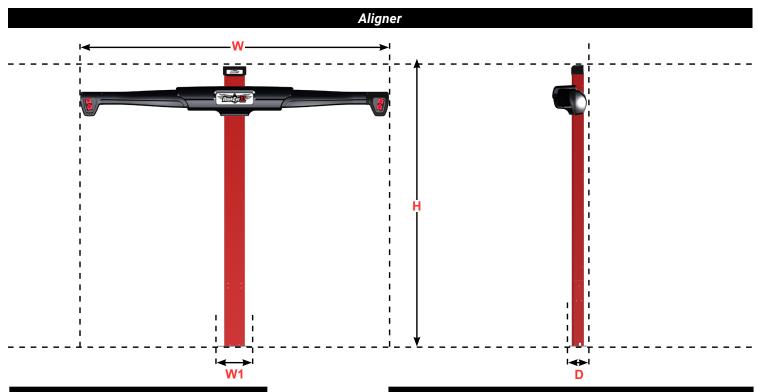

HXL421	IFC
Width (W)	<b>3403 mm</b> 134 in.
Height (H)	<b>3112 mm</b> 122.5 in.
Depth (D)	<b>381 mm</b> 15 in.
Base Width (W1)	838 mm 33 in.

	HXL421FC
Sensor Mount Type	Fixed Single Column Floor Mount
Power Requirements	Supplied by console
TDXL Targets	√
QuickComp	√
High Resolution Cameras	√
FIA Compatible	√
Adaptor Hanger Brackets	√
Multiple Target Storage Configurations	√
Customizable Lighted Sign	√



## HAWKEYE® XL: HXL421FC

World-class in heavy duty wheel alignment!



#### SPECIFICATIONS / ADJUSTMENTS / MEASUREMENTS



- \* Requires optional wide-angle target extensions.
- \*\* Requires optional Ride Height targets, only supported for two axle, light duty vehicles.

SPECIFICATIONS		
Weight of Target (with adaptor)	5.9 kg (13 lbs)	
Profile of Target	Length 381 mm Width 279 mm	
<b>Compensation Methods</b>	Forward Rolling and Jacking	
Camera Resolution	5 MP	
Track Width	2591 mm	
Min Distance from Turnplate to Wall	3302 mm	
Suggested Distance from cameras to center of turnplates	3429 mm	
Minimum distance from cameras to turnplates	3048 mm	
Recommended maximum distance from cameras to furthest targets	17780 mm	

ADJUSTMENTS		
Way Up Way Out WinToe	<b>√</b> *	
Wheel-Off Adjustment	Optional for medium and light duty	

MEASUREMENTS		
S.A.I. & Included Angle	√	
Set Back	√	
Max Steering Angle	To Lock*	
Lateral Offset	√	
Rear Set Back	√	
Axle Offset	√	
SBDA	<b>√</b> **	
Body Angle	<b>√</b> **	
Body Wheel Offset & Setback	<b>√</b> **	
Body Roll	<b>√</b> **	

#### **INCLUDED WITH ALL HXL421FC SENSORS**

Self Centering Clamp (Qty 6)



TDXL Targets (Qty 6)



Clamp to Target Adaptor (Qty 4)



Hangers (Qty 6)



Clamp to Target Adaptor with Rear Extensions (Qty 2)



For alignment information visit: hunter.com/hawkeye-xl

For local contact visit: hunter.com/contact

For general inquiries visit: www.hunter.com or call 800-448-6848