


HAWKEYE ELITE® XPANDABLE

HAWKELITEX, HAWKELITEXBLK

HUNTER
Engineering Company

DIMENSIONS / FEATURES []

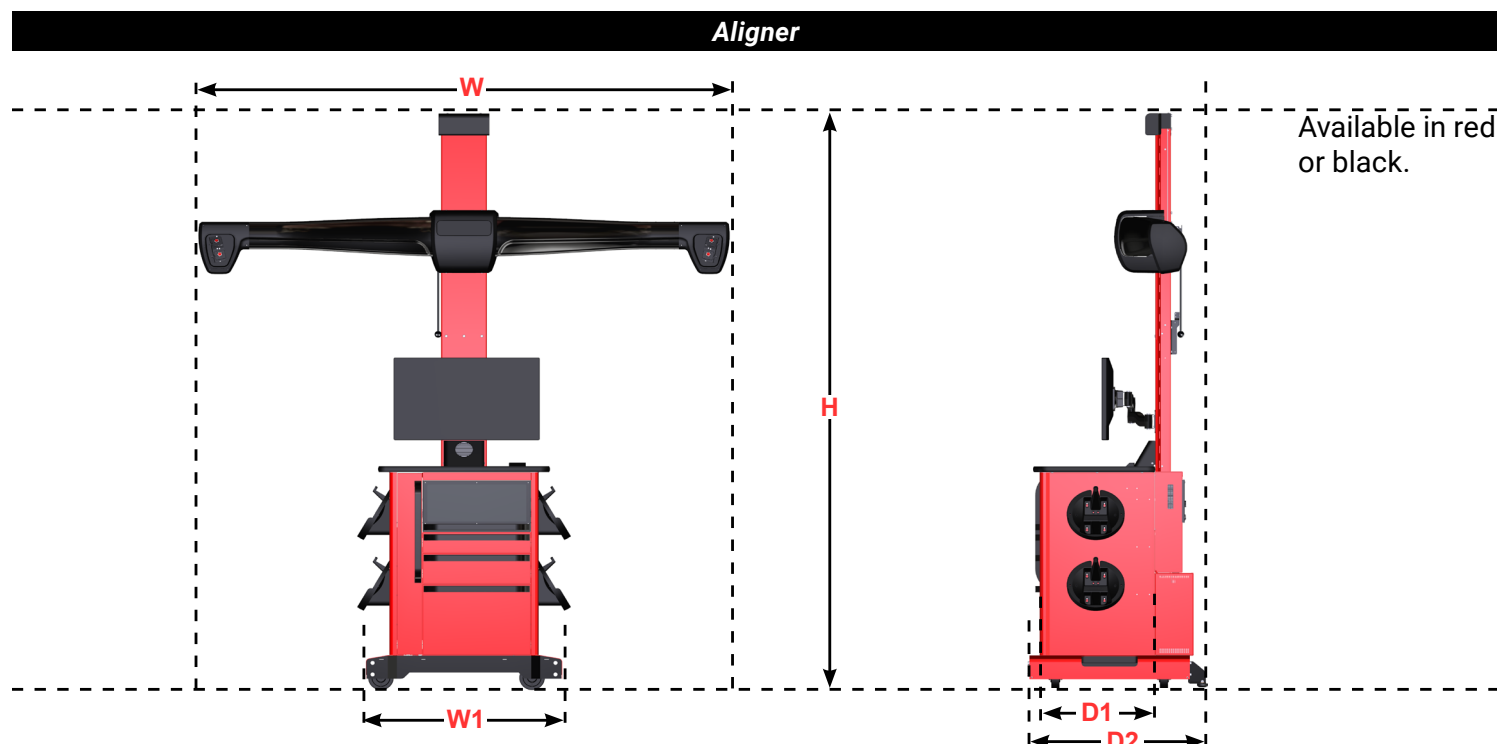

STANDARD CABINET	
LCD Monitor	32 in. Wide-Screen LED
Width (W)	105 in. 2667 mm
Height (H)	118 in. 2997 mm
Base Width (W1)	38 in. 965 mm
Cabinet Depth (D1)	23 in. 584 mm
Base Depth (D2)	35.5 in. 10820 mm

HAWKELITEX	
Sensor Mount Type	Manual Adjustable Mobile Cabinet Mount
Power Requirements	Supplied by Aligner Cabinet
TD Targets	✓
Vertical Camera Adjustment	✓
Mobile - Bay-to-Bay	✓
QuickComp	✓
High Resolution Cameras	✓
FIA Compatible	✓
QuickGrip Adaptors	✓
Multiple Target Storage Configurations	✓
Customizable Lighted Sign	✓

*Cabinet sides have optional holes for target holders.

For alignment information visit:
hunter.com/alignment-machines

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form AS08332-00, 05-25
Copyright © 2025, Hunter Engineering Company

HAWKEYE ELITE® XPANDABLE

HAWKELITEX, HAWKELITEXBLK

HUNTER
Engineering Company

SPECIFICATIONS / ADJUSTMENTS / MEASUREMENTS



* Max steering angle & toe-out on turns measurements require optional wide-angle targets (kit 20-2511-1).

** Requires Ride Height targets.

SPECIFICATIONS	
Metal on Metal Contact	Non-Contact
Weight of Target	6 lbs
Profile of Target	9 in.
Installation Time	5 seconds
Rolling Compensation Style	Forward
Camera Resolution	2,608 x 1,952 20,000,000 px
Track Width	80 in.
Wheel Base	210 in.
Distance to Wall	66 - 107 in.
Suggested Distance	99 in.
Short Bay Distance (see site info)	66 in.

ADJUSTMENTS	
Way Up Way Out WinToe	√*
Wheel-Off Adjustment	Optional

MEASUREMENTS	
S.A.I. & Included Angle	√
Set Back	√
Max Steering Angle	To Lock*
Live Ride Height	Standard**
Wheelbase Difference	√
Track Width Difference	√
Tread Width Difference	√
Lateral Offset	√
Rear Set Back	√
Axle Offset	√
SBDA	√**
Body Angle	√**
Body Wheel Offset & Setback	√**
Body Roll	√**

INCLUDED WITH ALL HAWKELITEX SENSORS

TD Targets



QuickGrip Adaptors



Deep-Wheel Extensions



Target Storage Brackets




Protective Rings for Deep Wheel Extensions



Protective Rings for Quick-Grip Adaptors



Quick-Change Arms

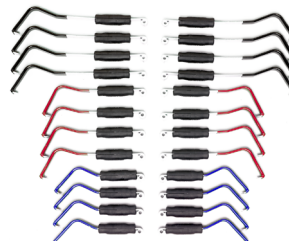

Ride Height Targets



For alignment information visit:
hunter.com/alignment-machines

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form AS08332-00, 05-25
Copyright 2025, Hunter Engineering Company