## ROAD FORCE® WALKAWAY™

Diagnostic Wheel Balancer




## SPECIFICATIONS / FEATURES / DIMENSIONS [



Power Requirements	196-253V, 10 amp, 50/60 Hz, 1 ph NEMA L6-20 plug included
Air Supply Requirements	100-175 psi (7 - 12 bar)
Approximate Air Consumption	4 CFM (113 Liters/Minute)
Internet Recommendations	Hardwire or Wireless add on, 10+mbps up and down
Roller Force	Variable up to 1,250 lbs (567 kg)
Rim Width Range	1.5 in to 20.5 in (38 mm to 521 mm)
Rim Diameter Range	10 in to 30 in (254 mm to 762 mm)*
ALU	14 in to 40 in (356 mm to 1016 mm)*
Max. Tire Diameter	40 in (1016 mm)
Max. Tire Width	20 in (508 mm)
Max. Tire Weight	175 lbs (79 kg)
Radial & Lateral Runout Accuracy	0.002 in (0.051 mm)
Imbalance Resolution	± 0.01 oz (0.28 g)
Placement Accuracy	512 positions, ± 0.35°
Balancing Speed	300 rpm
Motor	Programmable drive system and DC motor
Usable Power Cord Length	~138 in. (3505 mm)

\*Extreme wheel sizes may require manual data entry.

RFW-	33	32	31	30	23	22	21	20	13	12	11	10	03	02	01	00
Wheel Lift	√	√	√	√					√	√	√	√				
SpeedClamp®	√	√	√	√	√	√	√	√								
TDC Laser*	√	√			√	√			√	√			√	√		
Printer & Shelf	√		√		√		√		√		√		√		√	
Width (W)	<b>72 in.</b> 1829 mm	64 in. 1626 mm	<b>72 in.</b> 1829 mm	64 in. 1626 mm	<b>67 in.</b> 1702 mm	58 in. 1473 mm	63 in. 1600 mm	55 in. 1397 mm	<b>72 in.</b> 1829 mm	64 in. 1626 mm	<b>72 in.</b> 1829 mm	64 in. 1626 mm	67 in. 1702 mm	58 in. 1473 mm	63 in. 1600 mm	55 in. 1397 mm
Height (H)	89 in. 2261 mm	89 in. 2261 mm	72 in. 1829 mm	72 in. 1829 mm	89 in. 2261 mm	89 in. 2261 mm	72 in. 1829 mm	72 in. 1829 mm	89 in. 2261 mm	89 in. 2261 mm	72 in. 1829 mm	<b>72 in.</b> 1829 mm	89 in. 2261 mm	89 in. 2261 mm	72 in. 1829 mm	72 in. 1829 mm
Depth (D)	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm	59 in. 1498 mm
Shipping Weight	973 lb 441 kg	921 lb 418 kg	918 lb 416 kg	866 lb 393 kg	874 lb 396 kg	822 lb 373 kg	819 lb 371 kg	784 lb 355 kg	965 lb 437 kg	921 lb 417 kg	918 lb 416 kg	866 lb 392 kg	874 lb 396 kg	731 lb 331 kg	728 lb 330 kg	676 lb 306 kg

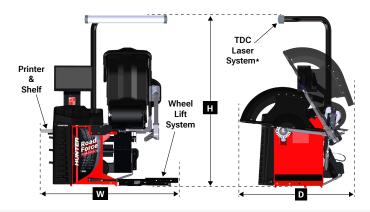

\*\*Road Force® Walkaway™ model numbers are trademarks of Hunter Engineering Company

The Road Force® Walkaway Wheel Balancer is a Class 3R laser product with power < 5mW.



LASER RADIATION - DO NOT STARE INTO THE BEAM OR VIEW DIRECTLY WITH OPTICAL INSTRUMENTS.

Viewing the laser output with magnifiers or related optical instruments within a distance of 100 mm from the laser aperture may pose an eye hazard.

For balancer information visit: hunter.com/wheel-balancers

For local contact visit: hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848