

Tire Changer Accessories



Visit hunter.com/shop to order select genuine Hunter® tire changer consumable parts online.
Outside the U.S.? Use the link to get in touch with your local Hunter team.



Accessories for

REVOLUTION™ AND MAVERICK®

The standard Revolution™ and Maverick® tire changers come equipped to handle virtually all tire and wheel combinations.

| | | |
|---|--------------|----------------------------------|
| A | RP6-3784 | Paste |
| B | RP6-1506 | Paste brush |
| C | 69-1394-2 | Pin protector |
| D | 221-759-2 | Valve core remover |
| E | 221-659-2 | Bead starting tool |
| F | RP11-2020688 | Valve puller |
| G | 192-233-1 | In-between cone |
| H | 192-223-2 | Small polymer cone |
| I | 192-226-1 | Double-sided polymer cone |
| J | 111-154-1 | Spare roller |
| K | 221-810-2 | SmartSet mount head (TCM only) |
| L | 179-15-2 | Glasses |
| M | 221-713-2 | Polymer mount head |
| N | 69-1392-2 | Rubber platen cover |
| O | 213-58-1 | Mirror (TCM only) (not pictured) |



The following options can be used to enhance serviceability of specialized applications.



Flange plate kit – 20-3158-1

Ideal for plastic clad wheels or reverse wheels where maximum protection is needed. Diameter range 98 to 240 mm.

Standard with TCRH, compatible with TCX51C



Flange plate accessory pin kit – 20-3675-1

For wheels with extreme lug hole and lug depth variances.



Dual wheel adaptor – 20-2964-1

Optional adaptor adds clamping capability for dual wheels, 19.5 in. wheels and other wheels with large center holes.



Specialty pin kit – 20-3877-1

Pins have rounded tips for spherical lug seats and are shorter to reduce stack height for reverse applications.



Thick bead kit – 20-3160-1

Wider hook for thicker beads. Suitable for skid steer, load range G-H-J-tires. Plus, reverse wheel plate for 19.5- and 17.5-in. rims.



Under-wheel light kit – 20-4153-1

Illuminates bottom bead for easier bead breaking and lubrication.

Compatible with TCM only, S/N EJC1384 and newer.



TCRH



TCM

Accessories for **TCX51C AND TCX51M**

Hunter TCX51C and TCX51M center-clamp tire changers includes a variety of accessories.

| | | |
|---|-----------------|---|
| A | 20-4019-1 | FastBlast with press arm and locking lower disc <i>Optional for TCX51M</i> |
| B | RP6-3784 | Mounting paste 3.5 kg |
| C | RP6-1506 | Applicator brush |
| D | RP11-8-11400327 | Bolt-on plastic head |
| E | 221-659-2 | Bead starting tool |
| F | 179-15-2 | Safety goggles |
| G | RP11-5-490223 | Plastic shovel protector (4) <i>Not applicable to TCX51M</i> |
| H | RP11-8-11400098 | Bead lever protector sleeve (4) |
| I | RP11-3009516 | Bead lever (standard) |
| J | RP11-4-145764 | 120 mm cone protector |
| K | RP11-4-145765 | 145 mm cone protector |
| L | RP11-4-103235 | 58 mm small bore cone |
| M | RP11-4-118294 | 75 mm small bore cone |
| N | RP11-5-102722 | Shaft spacer |




FastBlast with press arm and locking lower disc – 20-4019-1

Top-side blast inflation system is optimized to seat difficult tires.

✓ Large 6.5 gallon air tank features a higher capacity than most portable inflation devices

✓ Traditional jaw blast inflation is still standard and effective for most tires

Standard on TCX51C, optional for TCX51M



TCX51C

TCX51M



Flange plate kit – 20-3158-1

Required for plastic clad wheels or reverse wheels where maximum protection is needed. Diameter range 98 to 240 mm.



Large Bore Clamping Kit 20-4018-1

Adds clamping capability for truck wheels with large center holes. Also adds clamping height for high offset and wide wheels.



Rubber platen cover kit – RP11-8-11100470


Rubber pad & pin extensions allow reverse clamping of some wheels without a flange plate.

Standard accessories for **TCX-SERIES**

Hunter TCX-series tire changers include a variety of accessories to service a wide range of tire and wheel combinations.

| | | | TCX59 Pro | TCX58 | TCX53 Pro | TCX53xPLS | TCX51 | TCX51H Plus | TCX50 |
|---|-----------------|---|-----------|-------|-----------|-----------|-------|-------------|-------|
| A | FastBlast | FastBlast with press arm and locking lower disc | ✓ | ✓ | | | | | |
| | RP11-8-11100441 | FastBlast with press arm, no lower disc | | | | | | ✓ | |
| B | 20-3881-1 | Hybrid leverless mount head | ✓ | | ✓ | | | | |
| C | BP | Single bead press arm | | | | | ✓ | ✓ | |
| D | BPS | Bead press system w/ two press rollers and lower lifting disc | | | ✓ | ✓ | | | |
| E | 20-3882-1 | Bead press system exclusive to TCX59 Pro | ✓ | | | | | | |
| F | RP11-2121350 | Large pressing cone | | | ✓ | ✓ | | | |
| G | RP11-2413305 | Small pressing cone | | | ✓ | ✓ | | | |
| H | RP11-2202239 | Pressing cone extension | | | ✓ | ✓ | | | |
| I | RP6-3784 | Mounting paste 3.5 kg | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| J | RP6-1506 | Applicator brush | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| K | RP11-4-403749 | Bead press cone | ✓ | ✓ | | | | | |
| L | RP11-8-11100425 | Hi-grip jaw protector | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| M | RP11-8-11400327 | Bolt-on plastic head | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| N | 179-15-2 | Safety goggles | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| O | RP11-5-490223 | Plastic shovel protector (4) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| P | RP11-8-11400098 | Bead lever protector sleeve (4) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Q | 221-659-2 | Bead starting tool | ✓ | ✓ | | | | ✓ | |
| R | RP11-2202106 | Rim edge protector | ✓ | ✓ | | | | | |
| S | RP11-2020688 | Valve stem puller | ✓ | ✓ | | | | | |
| T | 221-759-2 | Valve core remover | ✓ | ✓ | | | | | |
| U | RP11-3009516 | Bead lever (standard) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| V | RP11-8-11100369 | Mount head inserts (traditional) | | ✓ | | | | | |

A Top-side blast inflation system is optimized to seat difficult tires.



Large 6.5 gallon air tank features a higher capacity than most portable inflation devices

Traditional jaw blast inflation is still standard and effective for most tires

FastBlast® inflation with press arm and locking lower disc highlighted



TCX59PRO



TCX58



TCX53HPLS



TCX51H



TCX50H


BEAD ASSISTANCE



Bead press arm for TCX50 series 20-3660-1

- ✓ The pressing head pushes the tire into the drop-center when mounting or demounting stiff sidewall tires, greatly reducing operator effort and risk of bead damage
- ✓ Lifting hook can be used to lift heavy beads into position
- ✓ Suitable for TCX50 machines with serial number IPD7742xx and up
- ✓ Optional press cone can be used with press head to push the wheel into position for easier external clamping

Standard with TCX51 (E, A or H models)

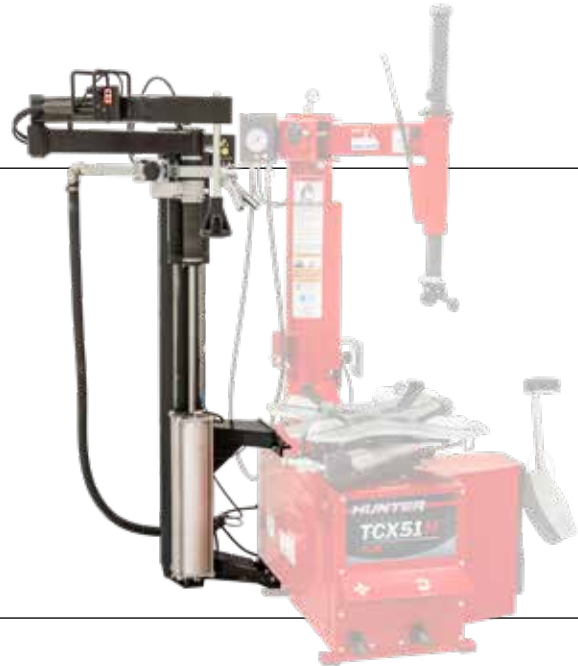

FastBlast™ bead press for TCX “H” models RP11-8-11100441

- ✓ Includes bead press foot with integrated lifting hook
- ✓ Adds FastBlast™ capability to quickly, safely, and easily seal truck, SUV, and aftermarket tires

*Standard on TCX51H Plus only.
Upgrade for TCX50H and TCX51H*



PATENTED

Bead press system for TCX50 series 20-4069-1

- ✓ Uniquely centers the pressing capabilities over the center of the wheel and tire to ensure maximum service strength and rigidity
- ✓ Lower locking disc can demount bottom beads, especially useful for large or heavy tires
- ✓ Provides effortless assistance with most difficult tires and custom wheels up to 26" diameter
- ✓ Not suitable for older TCX5X5 variations

Kit includes:

Bead press system with stationary arm, rotating arm and bead lifting arm

Small pressing cone
RP11-2413305

Large pressing cone
RP11-2121350

Pressing cone extension
RP11-2202239

Standard with TCX53 (E, A or H models)

Accessories for **TCX-SERIES**



Jaw extender & reducer (4 ea.) RP11-8-11100402

Extends range by 4 inches.
Reduces range by 5 inches.

Service for small wheels (6-8 in.), requires the use of the RP11-8-11100378 small wheel mount head.



Jaw reducer (4 ea.) RP11-8-11100430

Quickly slip over jaws. Works with all tabletops, with and without protectors installed.



Motorcycle wheel adaptor RP11-2201113

Raise clamping jaws to clear belt drive pulley and brakes used on motorcycles, including Harley Davidson. Plastic-covered to prevent wheel damage.



High grip jaw protectors (8 ea.)

Snap-fit design – **RP11-8-11100358**

Pinned design – **RP11-8-11100425**

Polymer jaw covers prevent metal-to-metal contact when performing external clamping.



Large Bore Clamping Kit 20-4018-1

Large bore clamping kit for TCX51C. Also adds vertical offset to handle very wide wheels.

Only compatible with TCX51C



Storage shelf – 20-3677-1

Large steel shelf system expands storage capacity. Left or right mount.



Blast inflator – RP11-8-11100403

Direct bursts of compressed air to seat difficult beads

Suitable for TCX50/51/53 only.



Plastic shovel protectors (4 ea.) RP11-5-490223

Clip-on side shovel protectors prevent damage when bead loosening low-profile tires on expensive alloy wheels.



BP press cone – RP11-4-403749

Clamping press cone.

Suitable for TCX51, TCX58, and TCX59

Standard on TCX58 and TCX59.

Mount heads and accessories for

TCX-SERIES

Plastic mount heads



"Wing" plastic mount head upgrade for new tire changers RP11-8-11400328

Includes 2 plastic heads and hardware to add rotation.

Suitable for TCX50 serial numbers higher than IKE721041 and TCX56 head kit serial numbers higher than VKI046785.



"Wing" plastic mount head upgrade for older tire changers RP11-8-11400329

Includes plastic head and all mounting hardware.

Suitable for TCX50 serial numbers lower than IKE721041 and TCX56 head kit serial numbers lower than VKI046785. Also suitable for all older TCX565, 550, 5x5 and 500 tire changers.



"Wing" plastic mount head RP11-8-11400327



Plastic mount head RP11-8314813

Old mount head fits all TCX-series tire changers

Steel mount head & accessories



"Wing" steel mount head RP11-5-107785


Includes steel head and all mounting hardware. Ideal for trailer and multi-ply tires.



Small-wheel steel mount head RP11-8-11100378

Easily service wheels down to 6" dia. (golf cart and scooter wheels). Use with extenders and reducers.

Compatible with TCX 50/51/53 E/A/H models only. Shown with RP11-8-11100370 plastic protectors (not included).

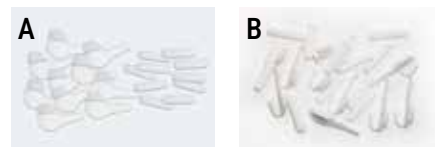

Plastic protectors

A. For steel mount heads (10 ea.) RP11-8-11100369


For use with TCX-series steel mounting head (RP11-5-107785)

B. For small-wheel steel mount heads (10 ea.) RP11-8-11100370

For use with new TCX-series steel mounting head (RP11-8-11100378)

Leverless mount head accessories

For V1 & V2 heads

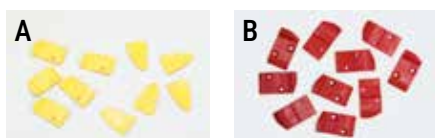

A. Inserts (10 ea.) RP11-8-11400293

B. Right side plastic protectors (10 ea.) 20-2684-3

For V3 heads



A. Inserts (incl. 10 left and 5 right) RP11-8-11400325

B. Single right-side insert RP11-8-1110326S

For V1, V2 & V3 heads



A. Rear plastic protectors (10 ea.) 20-2685-3

B. Replacement screw for protector (3 required) RP11-2-03438

Accessories for **TCA-SERIES**

| | | |
|---|---------------|---------------------|
| A | RP6-G1000A138 | Quick clamp |
| B | RP6-710090481 | Pin protector |
| C | RP6-710012940 | Pin extension |
| D | 145-341-2 | Air chuck |
| E | RP6-710090730 | Traction bar |
| F | 148-133-2 | Lubrication oil |
| G | RP6-3784 | Paste </td |
| H | 221-659-2 | Bead starting tool |
| I | RP6-1506 | Paste brush |
| J | RP6-710013421 | Support plate cover |
| K | 179-15-2 | Glasses |
| L | RP6-710014120 | Toolhead |
| M | RP6-1157 | Two-sided cone |
| N | RP6-G1000A86 | Mirror |



The following options can be used to enhance serviceability of specialized applications.



Flange plate kit RP6-G1000A87

Optional kit is ideal for plastic-clad wheels or reverse wheels where maximum protection is needed.



Specialty flange plate for center-clamp tire changers 20-3892-1

Rounded pins are compatible with spherical lug seat wheels. Base is also compatible with Hunter pin kit 20-3675-1



19.5 inch adaptor – 20-2341-1

Adds clamping capability for 19.5 in. wheels with large center holes.



* Machine no longer available in the U.S.

TCA34R *

Standard accessories for TC-SERIES

| | | | TC39 | TC37 | TC33BP | TC33PL | TC33 | TC33M | TC33MBP |
|---|---------------|-----------------------|------|------|--------|--------|------|-------|---------|
| A | 20-3781-1 | Bead press arm | | | ✓ | | | | ✓ |
| B | 20-3782-1 | Plus arm device | | | | ✓ | | | |
| C | RP6-G1000A138 | Quick clamp | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| D | 148-133-2 | Lubrication oil | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| E | 179-15-2 | Safety glasses | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| F | RP6-3784 | Mounting paste | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| G | RP6-1506 | Paste brush | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| H | RP6-710090730 | Traction bar | ✓ | ✓ | | | | | |
| I | Varies | Extra mount head | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| J | RP6-G800A11 | Shovel protector | | | ✓ | ✓ | ✓ | | |
| K | RP6-1157 | Two-sided cone | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| L | RP6-710013421 | Support plate cover | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| M | RP6-G1000A86 | Mirror | ✓ | ✓ | | | | ✓ | ✓ |
| N | RP6-G1000A11 | "HM" bead lever | | ✓ | | | | | |
| O | RP6-710090481 | Pin protector | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| P | RP6-710012940 | Drive pin extension | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Q | RP6-0326 | Bead protector sleeve | | ✓ | | | | | |



* Machine no longer available in the U.S.



TC39SS *



TC37 *




TC33BP*



TC33M *

Accessories for **TC-SERIES**

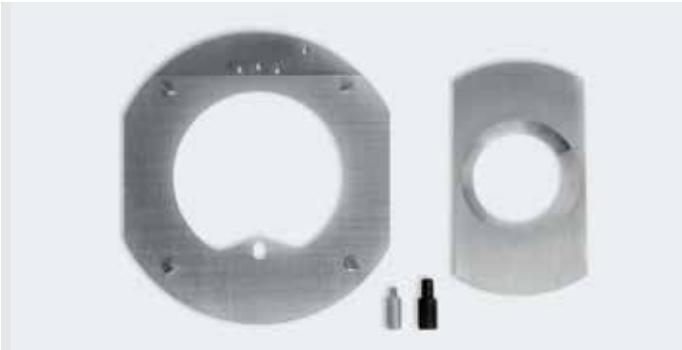

19.5-inch truck center cone adaptor kit 20-2341-1

Adapts large center-bore wheels to center-clamp tire changers.



Flange plate for center-clamp tire changers – RP6-G1000A87

Useful for plastic-faced wheels and/or reverse wheels where maximum finish protection is needed. Max diameter 230mm.



Rubber protection plate for center-clamp tire changers – RP6-710013421

Soft, rubber pad protects rim when servicing reverse wheels. Intended to be removed when not servicing reverse wheels.



Specialty flange plate for center-clamp tire changers – 20-3892-1

Rounded pins are compatible with spherical lug seat wheels. Base is also compatible with Hunter pin kit 20-3675-1



Long flange plate pins RP6-G1000A102

Optional pins are longer, allowing servicing of reverse wheels with extra deep spokes. For use with Hunter center-clamp flange plate RP6-G1000A87.

Requires longer clamp shaft RP6-710013641



Short drive pin – 135-486-2

Useful when servicing some reverse wheels. Also useful in combination with older [20-2341-1] 19.5 kits and GM 16 in. dually wheel service.

Standard with 19.5 in. kit 20-2341-1.



Drive pin protectors for center-clamp tire changers RP6-710090481 (1 ea.)

Plastic cap protects lug holes of reverse wheels when clamped face down.

Accessories for **TC-SERIES**



Polymer mount head (1 ea.)
221-675-2


Rides closer than steel designs, reducing stress to beads when demounting and mounting low-profile tires. Wear component designed to protect the tire and rim.

221-675-2-B Polymer mount heads (6 ea.)



Mechanical bead roller
RP6-G1000A7

Pushes the upper bead of the tire below the right hand area of the mount head keeping the tire in the proper location during mounting. Eliminates extra work to mount stiff tires.

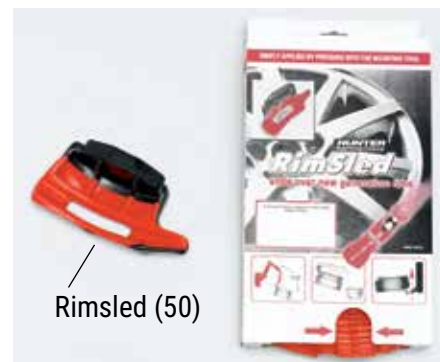

Rimsled (50)

Rim protector (box of 50) –
RP6-12916

Provides additional protection for painted or plastic-clad rims. Rimsled only fits “black” mount heads.



Wide toolhead – 221-798-2

Fiberglass reinforced nylon provides great wheel protection and long service life.

Suitable for TCA series and TC39 tire changers.



Plastic shovel protectors (1 ea.)
RP6-G800A11

Clip-on side shovel protectors prevent damaging metal-to-metal contact when bead loosening.



Shaft extender
RP6-790012540

Useful to extend the clamping shaft when used with older RP6-G1000A87 flange plates.



Cone cover, wheel hub protector
RP6-1156

Protects the wheel hub bore from contact when center-clamping.



Two-sided cone for LT wheels
RP6-1157

For use with the regular-sized clamping cone when the wheel hub bore is larger than the standard cone.

WHEEL LIFT SYSTEMS

Servicing large, heavy SUV, light-truck and custom wheels requires extra effort. Optional pneumatic wheel lifts help prevent potential injuries and fatigue from lifting heavy wheels into place. The pedal-controlled wheel lift quickly raises the wheel, leaving the technician's hands free to control and position it on the tire changer clamping system.

A wheel lift can be ordered with newly purchased tire changer or separately as a retrofit kit. See the chart below for part numbers.

Wheel lift part number (if ordered separately)

| RP6-G1000A146* | 20-2045-1 | 20-3863-1 | 20-4170-1 |
|-------------------------------|----------------------------------|-----------|-----------------------------|
| TC39 (Standard with TC39W) | TCX59 (Standard with TC59W) | TCX51C | TCM (Standard with TCMW) |
| TC37 (Standard with TC37W) | TCX58 (Standard with TC58W) | | |
| TC33 | TCX53E (Standard with TC53EW) | | |
| TC33M | Other TCX50-500 | | |

*not available in the U.S.

Integrated wheel lifts boost productivity and help prevent injury and fatigue




TCMPro, shown with pick and place wheel lift (20-4152-1)



CONNECTIVITY KIT

| | | |
|---|-----------|---|
| A | 20-3914-1 | TCM only |
| B | 20-3871-1 | TCX56, TCX57, TCX58, TCX59, TCX59Pro, and TCX5xH models |

- ✓ Record individual tire changes with inflation pressure
- ✓ Track tire changing trends
- ✓ See equipment return on investment
- ✓ Combine with other connect-able Hunter equipment for a complete shop view



| | |
|------------------------------|---|
| Power Requirements | Supplied by tire changer via provided cable |
| Internet Requirements | 10 Mbps wired or wireless internet connection |
| Wireless Requirements | Dual-band 2.4/5GHz 802.11 a/b/g/n Wi-Fi |
| Wired Requirements | Standard RJ45 ethernet connector |





Installs on back side of machine (TCM shown here)


Standard accessories for

HEAVY-DUTY TIRE CHANGERS

| | | | TCX635HD | TCX635PHD | TCX645HD |
|---|-----------------|------------------------------------|----------|-----------|----------|
| A | RP11-8-12100040 | Wheel ramp | | ✓ | |
| B | RP11-8-12100156 | Alloy wheel clamp jaws (4) | | ✓ | ✓ |
| C | RP11-2005957 | Steel wheel clamp | ✓ | ✓ | ✓ |
| D | RP11-2306808 | Alloy wheel clamp | ✓ | ✓ | ✓ |
| E | RP11-801251904 | Drop-center clamp | | | ✓ |
| F | RP11-8-12100181 | Mounting lever (steel & ALU heads) | | ✓ | |
| G | RP11-3006365 | Standard lever | ✓ | ✓ | ✓ |
| H | RP11-2105954 | Truck bead lever | ✓ | ✓ | ✓ |
| I | RP6-3784 | Mounting paste | ✓ | ✓ | ✓ |
| J | RP6-1506 | Brush | ✓ | ✓ | ✓ |

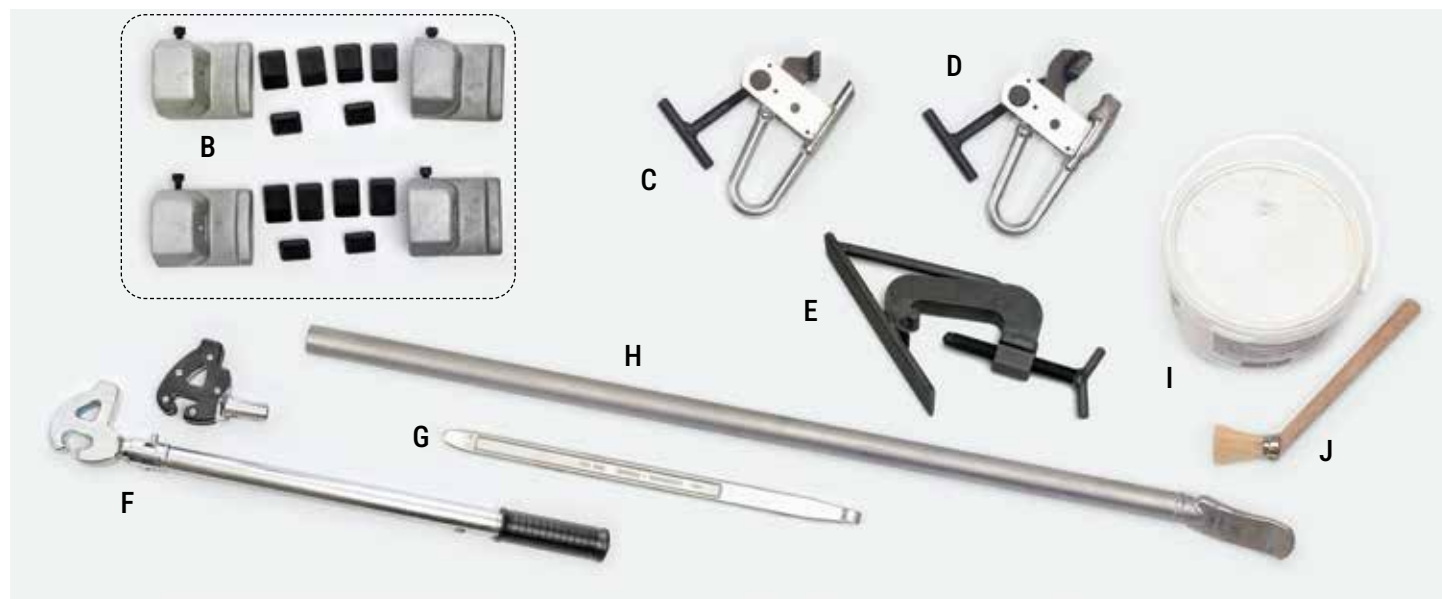

TCX635HD

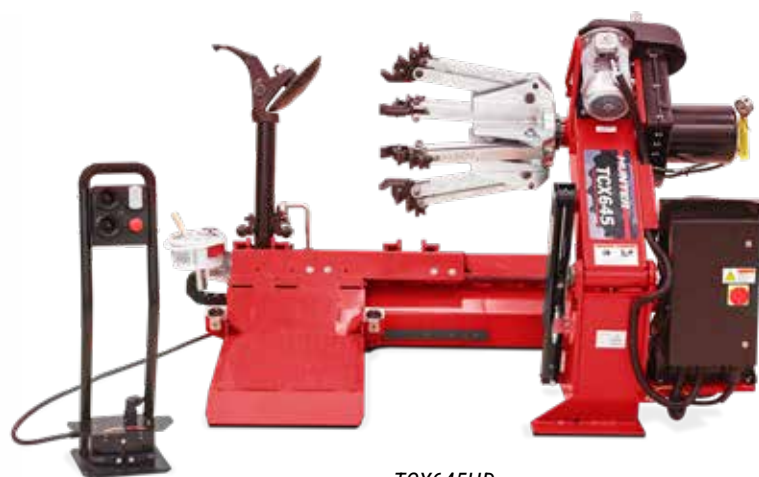

TCX645HD

HEAVY-DUTY TIRE CHANGERS

TCX635HD



Aluminum jaw covers (4 ea.) RP11-801254494

Prevents center-bore damage on aluminum wheels.

Suitable for TCX625 models prior to serial number IPC301799K.



Disk roller – RP11-2016908

Bead-loosening roller for all vintage TCX62xHD and TCX635 tire changers



Alloy wheel clamp jaws (4 ea.) – RP11-8-12100156

Clamping protection for alloy wheels.

Suitable for all TCX635 and TCX625 models after serial number IPC301799K.


Standard with TCX635PHD



Mounting lever – RP11-8-12100181

Speeds outside bead mounting. Includes steel wheel and ALU wheel heads.

Standard TCX635PHD



Entry/exit ramps RP11-8-12100040

Ease rolling tire onto changer.

Compatible with TCX625 and TCX635

Standard with TCX635PHD

TCX645HD



Tubeless roller RP11-2306040

Eases bead loosening, mounting and demounting of tubeless truck and bus tires.



Alloy wheel clamp jaws (4 ea.) RP11-8-12100156

Clamping protection for alloy wheels

Suitable for TCX640 and 645 models after serial number IPC301799K.



Tire cutter – RP11-8-12100185

Quickly and easily cut foam filled tires off the wheel



Drop-center clamp RP11-801251904

For skidder and similar type tires

Standard with TCX645HD



Self-centering tulip chuck extensions (4 ea.) RP11-8-12100155

Expands clamping size capacity to 56 inches.



Pneumatic bead press and traction device – RP11-8-12400015

Compatible with all HD tire changers



Wireless control kit 20-3842-1

Eases use of control console



Alloy jaws insert RP11-8-12100172

For use on units with serial number IIC735988 or greater.



Bead breaker roller – RP11-2016581

Break beads, demount and mount 22.5" tires faster using TCX645HDG2's carriage

Compatible with TCX635 & TCX645HDG2 only.

UNIVERSAL ACCESSORIES



A. High-performance bead lever "HM" – RP6-G1000A11

Ease servicing effort, specifically with low-profile tires.

B. Bead lever protector sleeve RP6-0326 (1) | RP6-0326 (box of 10)

Protects wheel flange during demounting.




C. Traditional flat design bead lever – RP11-3009516

For conventional demounting

D. Bead lever sleeve protectors (4 ea.) – RP11-8-11400098

Protects wheel flange during demounting.

For use with RP11-3009516

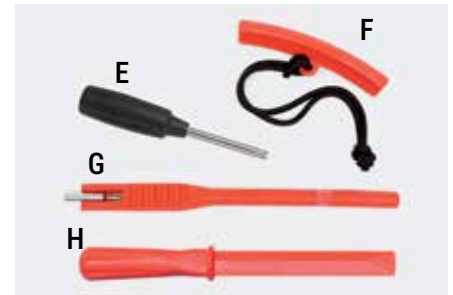

E. Valve core remover – 221-759-2

F. Rim edge protector – RP11-2202106

G. Valve stem puller – RP11-2020688

H. Bead starting tool – 221-659-2

I. Mounting paste (3.5 kg) RP6-3784

High-performance, pre-mixed paste eases mounting and allows faster bead sealing during inflation.

RP6-3784-C = 4 Buckets

RP6-3784-CP = 120 Buckets

J. Brush, angled applicator – RP6-1506



Lubri-Oil air equipment lubrication – 148-133-2

Lubri-Oil will not emulsify in water – will separate when contaminated with water overflow from the regulator.


Available in 16-oz bottles. Twelve (12) to a case when ordered in quantity. Lubri-Oil weight is ISO32.

K. 28-in. bead depressor tail with traction bar – RP6-G1000A67

Locks low-profile tire to rim, pushes into drop center, and keeps upper bead lubricated. Services up to 28 in. diameter rims.

L. Traction bar (only) RP6-710090730

Used to lock tire to rim.

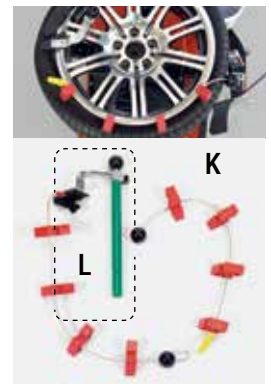

Drop-center mounting clamp RP6-70210E

Positions bead into the drop-center.

Not for extreme positive offset, flat-faced rims or soft-line flanges.

Your trusted service professionals

- ✂ 520+ independent Technical and Training Representatives in U.S. and Canada
- 🏠 All Reps complete a 9-week advanced training course
- 🚗 80% of Reps live within 60 miles of most customers
- 👤 On-site product training by Hunter-certified Technical and Training Reps
- ☆ 98% of customers recommend Hunter products based on service



Contact your
local team

hunter.com/contact



Because of continuing technological advances, specifications, models and options are subject to change without notice.

Maverick is a registered trademark of Hunter Engineering Company.
Revolution and FastBlast are trademarks of Hunter Engineering Company.

HUNTER
Engineering Company

www.hunter.com