

# Maverick™ Tyre Changer

*Power and precision made easy*

**NEW**

**MADE  
IN USA** ★  
*USING THE FINEST US & GLOBAL MATERIALS*



# Key features At-A-Glance

## EXCLUSIVE


### Groundbreaking Responsive Controls

- ✓ Fine control or fast on-demand
- ✓ Hydraulic precision easier than air controls
- ✓ Ergonomic for all day use
- ✓ Excellent tactile feedback — one-finger control for all functions



More Pressure  
= More Speed

Less Pressure  
= Finer Control



## PATENT PENDING

### Articulating Leverless System



- ✓ All tools automatically sync to rim diameter
- ✓ Rim diameter retained for maximum efficiency of wheel sets






TCM shown with optional wheel lift

**EXCLUSIVE**  
**Intelligent Safety and Productivity**

- ✓ Monitors roller and hook positions
- ✓ Prevents unintended wheel contact
- ✓ Logic automatically “homes” rollers, head, and wheel lift for hands-free productivity
- ✓ Smart software: customize travel and rotate speeds, ramp rate, and more

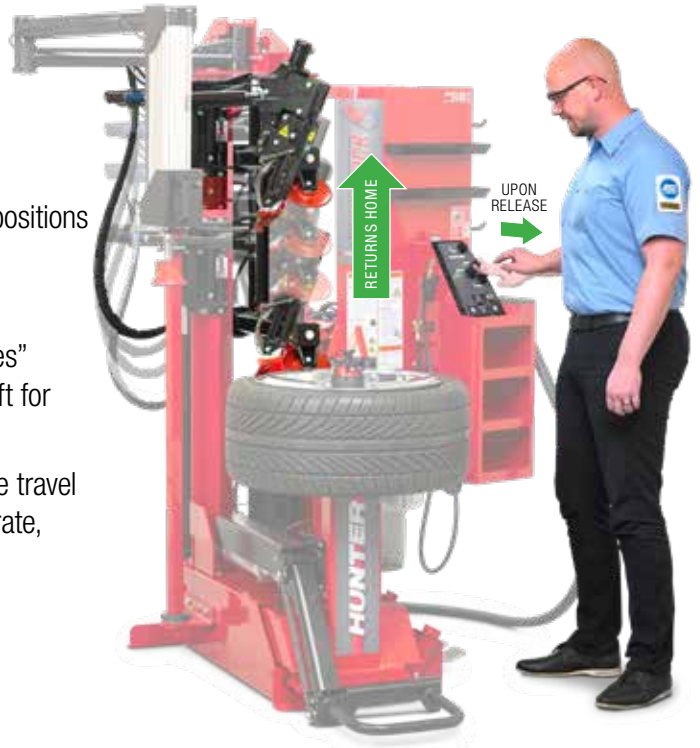

**EXCLUSIVE**  
**InflationStation™**

- ✓ Inflates at the press of a button
- ✓ Allows operator to walk away while filling
- ✓ 33% faster than standard inflation systems




**Variable Speed Rotation**

- ✓ 0-17 RPM for fast cycle times
- ✓ Fully variable *reverse* rotation for maximum control

**EXCLUSIVE**  
**SmartSet™ Leverless Head**

- ✓ Demounting hook deploys to catch and lift bead
- ✓ Mount head works with clad, raised spoke, and other unique wheel designs

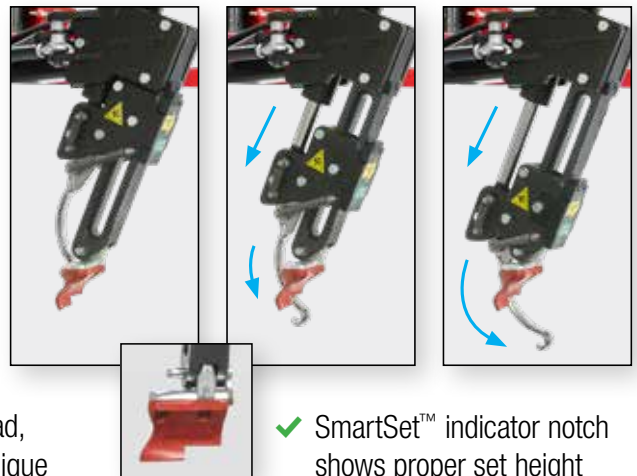

- ✓ SmartSet™ indicator notch shows proper set height

# Technician-Focused Features

PATENT PENDING

*Control console is built around the technician*

- ✓ Intuitive layout allows full focus on the tyre
- ✓ Padded wrist rest prevents fatigue
- ✓ Ample, accessible storage for tools, kits, and accessories



EXCLUSIVE

*SmartSet™ leverless advantages*

- ✓ Demounting hook deploys to catch and lift bead
- ✓ No risk of lever damage to operator or rim
- ✓ Mount head works great with clad, raised spoke and other unique wheel designs
- ✓ SmartSet™ indicator notch shows proper set height



PATENT PENDING

## RollerLock™ clamp

- ✓ Ball bearing threads clamp quickly and tightly
- ✓ Lever handles multiply clamping force
- ✓ Smooth shaft reduces center bore damage risk



## Hydraulic operation


- ✓ Self-contained hydraulics provide reliability
- ✓ Each tool can be moved quickly, slowly, or held as needed
- ✓ No erratic movement when loaded and unloaded
- ✓ Compressed air contamination not a factor



PATENT PENDING

## Double-duty bead press

- ✓ Plenty of power for tough applications
- ✓ Bead ledge allows pusher to be used as a lifting device also

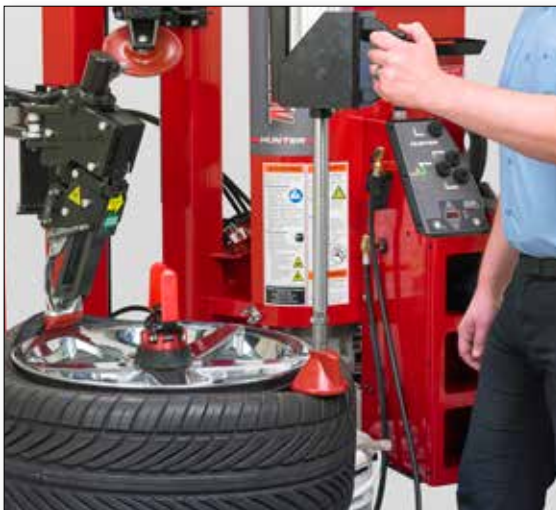

**EXCLUSIVE**

## *InflationStation™ boosts productivity*

InflationStation™ automatically fills tyre to desired pressure.

- ✓ Operator stands back or even walk away from inflation
- ✓ 33% faster than traditional foot pedal inflation systems



*Blast inflation directs large blast of air for tough bead seating.*



## *Match-mounting*



The Maverick™ tyre changer's bead rollers allow spinning of tyre on rim, helping match-mount stiffest point on tyre to low spot on rim.




When used with Hunter's Road Force Elite®, the Maverick™ quickly and easily helps eliminate vibration problems balancers alone can't fix.

## **Bead Massage**

During bead massage, rollers apply force to the tyre walls, assisting proper bead seating and reducing vibration concerns.

When combined with Road Force® match-mounting, virtually all vibrations can be eliminated.

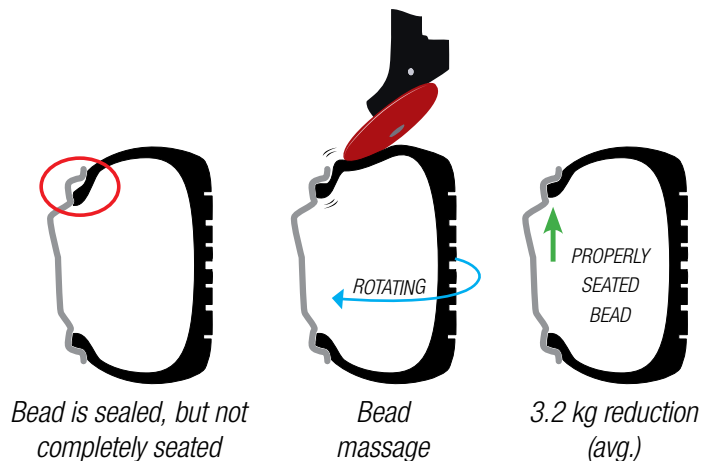

# Standard Accessories

The standard Maverick™ tyre changer comes equipped to handle virtually all tyre and wheel combinations.

<b>A</b>	RP6-3784	Paste
<b>B</b>	RP6-1506	Paste brush
<b>C</b>	69-1394-2	Pin protector (2)
<b>D</b>	221-759-2	Valve core remover
<b>E</b>	221-659-2	Bead starting tool
<b>F</b>	RP11-2020688	Valve puller
<b>G</b>	192-233-1	In-between cone (2)
<b>H</b>	192-225-1	Small polymer cone (2)
<b>I</b>	192-226-1	Double-sided polymer cone (2)
<b>J</b>	111-154-1	Spare roller
<b>K</b>	179-15-2	Glasses
<b>L</b>	221-810-2	Polymer mount head (2)
<b>M</b>	69-1392-2	Rubber platten cover (2)



# Optional Accessories

The following options can be used to enhance serviceability of specialized applications.



## Flange plate kit — 20-3158-1

Ideal for plastic clad wheels or reverse wheels where maximum protection is needed. Maximum diameter 240 mm.



## Dual wheel adaptor — 20-2964-1

Optional adaptor adds clamping capability for dual wheels, 19.5 in. wheels, and wheels with large center holes.



## Thick bead kit — 20-3160-1

Wider hook for thicker beads. Suitable for skid steer, load range G-H-J-tyres. Plus, reverse wheel plate for 19.5- and 17.5-in. rims.



## Flange plate accessory pin kit — 20-3675-1

For wheels with extreme lug hole and lug depth variances. 48.3 mm minimum length pins included. Extensions add 30.5 mm, for a total pin length of 129.5 mm.

## Compact wheel lift — 20-3884-1

- ✓ Lifts the heaviest assemblies with ease
- ✓ Auto lowering saves time and prevents damage
- ✓ Configurable pedal operation




**MADE IN USA**  
USING THE FINEST US & GLOBAL MATERIALS



# Specifications


<b>Power Requirements</b>	<b>TCM:</b> 208-230V, 1Ph, 60Hz, 18A <b>TCME-215:</b> 208-230V, 1Ph, 50Hz, 18A <b>TCME-435:</b> 230-380V, 3Ph, 50Hz, 10/6A
<b>Air Supply Requirements</b>	8.6 ± 1.7 bar (125 ± 25 psi)
<b>Mount / Demount Tool</b>	Polymer head w/ Leverless
<b>Clamping Type</b>	Center w/RollerLock
<b>Bead Loosening Type</b>	Upper / Lower Roller
<b>Match Mounting Capable</b>	Yes
<b>Rim Diameter Range</b>	254 mm – 864mm (10 in. – 34 in.)
<b>Maximum Tyre Diameter</b>	1270 mm (50 in.)
<b>Maximum Wheel Width</b>	483 mm (19 in.)
<b>Drive</b>	Variable up to 17 rpm Clockwise/Counter Clockwise Torque: 949 Nm (700 ft-lbs)
<b>Shipping Weight</b>	550 kg (1211 lbs)

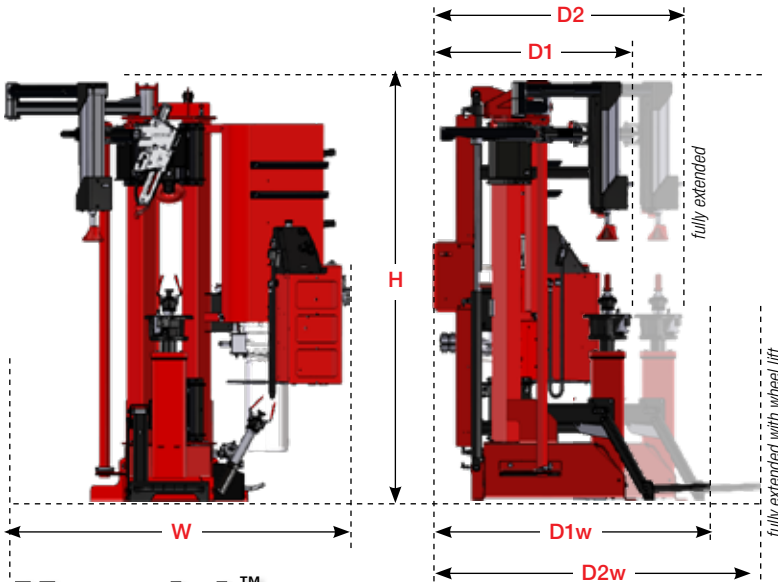

## Maverick™

	Width (W)	Height (H)	Depth (D1)	Depth (D2)	Weight
<b>TCM (standard)</b>	1346 mm 53 in	1956 mm 77 in	1168 mm 46 in	1448 mm 57 in	483 kg 1065 lbs
<b>TCM (with wheel lift)</b>			1524 mm 60 in	1803 mm 71 in	514 kg 1132 lbs

Machine can be placed right against a wall for maximum space efficiency.

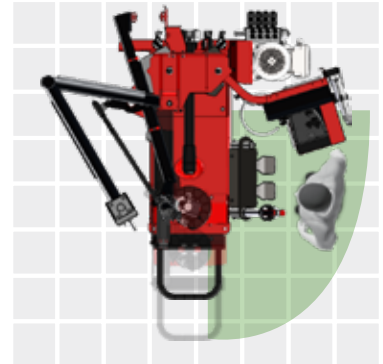

### WDK Accessories Kit — 20-3985-1



Because of continuing technological advancements, specifications, models and options are subject to change without notice.

0523BH

Copyright © 2023, Hunter Engineering Company

**HUNTER**  
Engineering Company

[www.hunter.com](http://www.hunter.com)

11250 Hunter Drive, Bridgeton, MO 63044, USA

Tel: 1-314-731-3020, Fax: 1-314-731-0132

Email: [international@hunter.com](mailto:international@hunter.com)

Form CB08056-05, 05/23  
Supersedes Form CB08056-05, 03/23