

# TCX645HD

Heavy Duty Tire Changer

**HUNTER**  
Engineering Company


## SPECIFICATIONS [ ]



TCX645HD

Power Requirements	230V +/-10%, 3 Ph, 60Hz, 26A
Maximum Tire Diameter	90.5 in. (2299 mm)
Maximum Wheel Width	42 in. (1067 mm)
Maximum Wheel Weight	2,200 lbs (1000 kg)
Minimum Rim-Center Hole Diameter	3.94 in. (100 mm)
Rim Diameter Range	14 - 56 in. (355 - 1422 mm) with optional accessories
Match Mounting Capable	Yes
Torque; Low/High Speed	3172 ft-lbs. (4300 N-m) 2213 ft-lbs. (3000 N-m)
Rotation Speed	10 rpm and 5 rpm
Shipping Weight	1,631 lbs. (740 kg)
Width (W)	80 - 94 in. (2032 - 2388 mm)
Height (H)	37 - 61 in. (940 - 1550 mm)
Depth (D)	64 - 83 in. (1626 - 2108 mm)

ACCESSORIES	TCX645HD
Alloy Wheel Clamp	✓
Drop Center Skidder Clamp	✓
Steel Wheel Pliers	✓
Aluminum Wheel Pliers	✓
Lubricant & Application Brush	✓
Standard Lever	✓
Bead Lever	✓

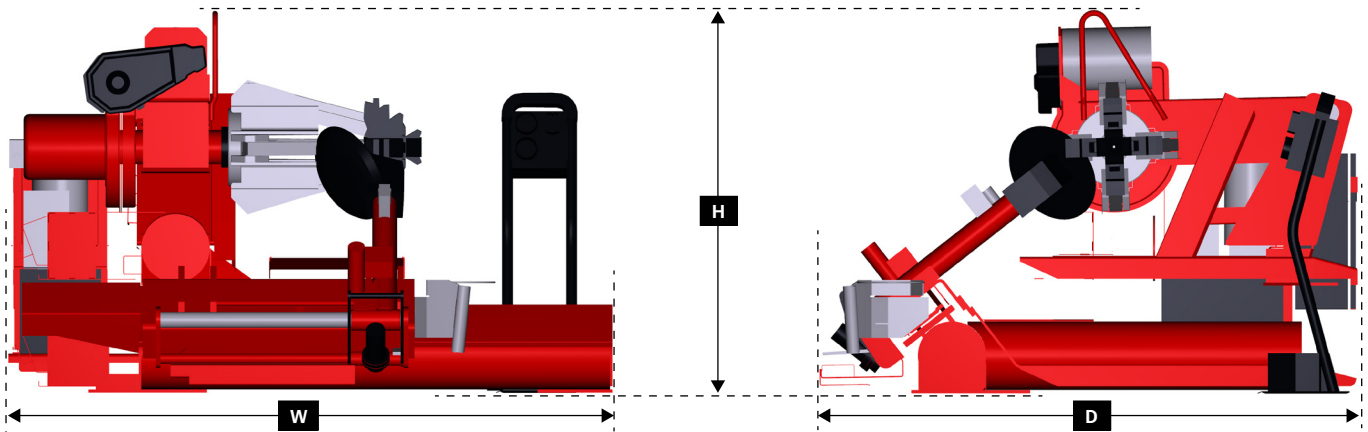

For tire changer information visit:  
[hunter.com/tire-changers](http://hunter.com/tire-changers)

For local contact visit:  
[hunter.com/contact](http://hunter.com/contact)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form CS07811-00, 02-25  
Supersedes Form CS07811-00, 05-24  
Copyright ©2025, Hunter Engineering Company