


# TCX635HD

Heavy Duty Tire Changer

**HUNTER**  
Engineering Company


## SPECIFICATIONS [ ]

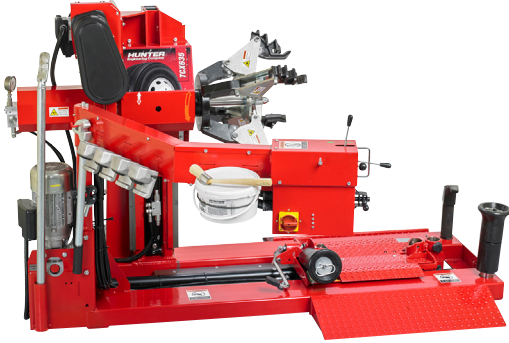

TCX635HD (with Optional Accessories)

Power Requirements	TCX635-2-1-6: 230V, 1Ph, 60Hz TCX635-2-3-6: 230V, 3Ph, 60Hz TCX635-4-3-5: 400V, 3Ph, 50Hz
Maximum Tire Diameter	58 in (1,473 mm)
Maximum Wheel Width	27 in (686 mm)
Maximum Wheel Weight	1,545 lbs (700 kg)
Minimum Rim-Center Hole Diameter	3.94 in (100 mm)
Rim Diameter Range	14.5 - 24.5 in (368 - 622 mm)
Match Mounting Capable	Yes
Torque	1,625 ft-lbs. (2,203 N-m)
Rotation Speed	9 rpm CW & CCW
Shipping Weight	1,168 lbs (530 kg)
Width (W)	86 in. (2,184 mm)
Height (H)	40 - 52 in (1,016 - 1,321 mm)
Depth (D)	28 - 65 in (711 - 1,651 mm)

TCX635 - ACCESSORIES	HD
Aluminum Wheel Clamp	✓
Steel Wheel Clamp	✓
Tire Paste & Brush	✓
Hook & Hook Pin	✓
Roller	✓
Lever	✓
Pocket V Cover	✓
Two Ramps	
Mounting Lever	
Aluminum Jaw Covers	

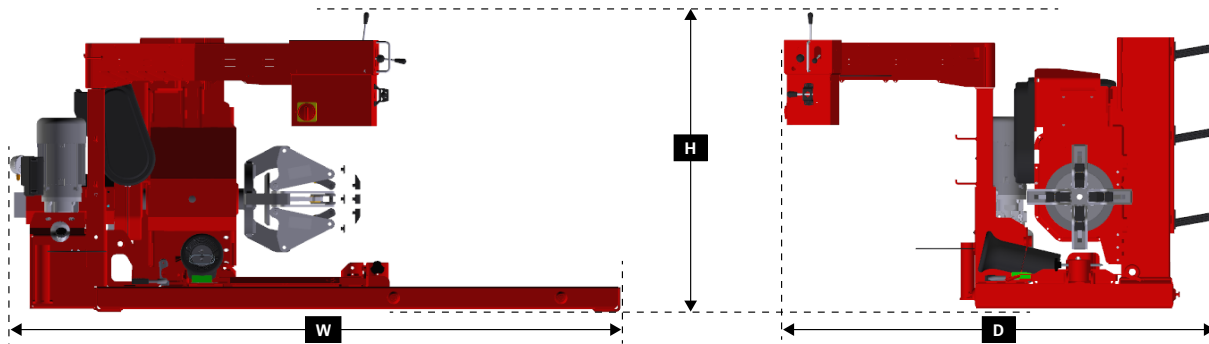

For tire changer information visit:  
[hunter.com/tire-changers](http://hunter.com/tire-changers)

For local contact visit:  
[hunter.com/contact](http://hunter.com/contact)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form CS07823-05, 05-24  
Supersedes Form CS07823-05, 02-21  
Copyright ©2024, Hunter Engineering Company