

TCX51C™


Center-Clamp Tire Changer

HUNTER
Engineering Company

SPECIFICATIONS []



Power Requirements	208-230V / 50/60Hz / 1 ph
Air Supply Requirements	115 - 145 psi (8 - 10 bar)
Base Machine Weight	925 lbs / 420 kg
Usable Power Cord Length	~114 in. (2895 mm)
Mount / Demount Tool	Polymer Standard Head
Clamping Type	Center
Bead Loosening Type	Side Shovel
Match Mounting Capable	Yes
Rim Diameter Range	10 in. - 30 in. (254 mm - 762 mm)
Maximum Tire Diameter	44 in. (1,130 mm)
Maximum Wheel Width	14 in. (356 mm)
Drive Speed	7 and 17 rpm CW / 7 rpm CCW
Bead Press Features	Upper Press Foot, FastBlast Inflation, Lower Locking Disc.
Wheel Lift Capacity (If equipped)	175 lbs (79 kg)
Width (W)	77 in (1956 mm)
Height (H)	80 in (2032 mm)
(H1) *Height between Center Clamp and Standard Mount / Demount Head	11 in (279 mm)
Height (H)	77 in (1956mm)
Depth (D)	55 in (1397 mm)

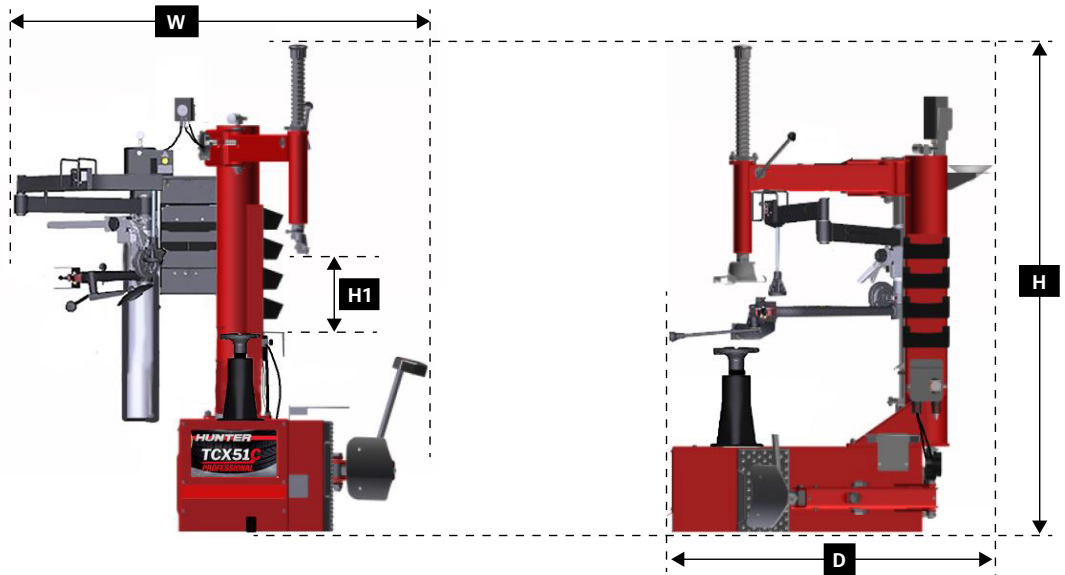

For tire changer information visit:
hunter.com/tire-changers

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form CS07962-00, 05-24
Supersedes Form CS07962-00, 01-23
Copyright ©2024, Hunter Engineering Company