

SPECIFICATIONS []



TCMPRO




TCMW



TCM (base model)

Power Requirements	208-230 VAC, 1 Ph, 60Hz, 14A, NEMA 20 amp plug, L6-20P
Air Supply Requirements	125 ± 25 psi (8.6 ± 1.7 bar)
Usable Power Cord Length	~114 in. (2895 mm)
Mount / Demount Tool	Polymer Leverless
Clamping Type	Center w/ Quick Clamp
Bead Loosening Type	Upper and Lower Roller
Match Mounting Capable	Yes
Rim Diameter Range	10 in. - 34 in. (254 mm - 863 mm)
Maximum Tire Diameter	50 in. (1,270 mm)
Maximum Wheel Width	19 in. (381 mm)
Maximum Wheel Weight	175 lbs (79 kg)
Drive	Variable up to 17 rpm CW / CCW Torque: 700 ft-lbs (949 Nm)
Shipping Weight	1230-1330 lbs (557-603 kg)

	Width	Height	Depth (D1)	(Fully Ext.) Depth (D2W)	Weight
TCM (standard)	53 in 1346 mm	77 in 1956 mm	46 in 1168 mm	57 in 1448 mm	1065 lbs 483 kg
TCMW (with lift)			60 in 1524 mm	71 in 1803 mm	1132 lbs 514 kg
TCMPRO (with lift and light)			70 in 1778 mm	81 in 2057 mm	1145 lbs 520 kg

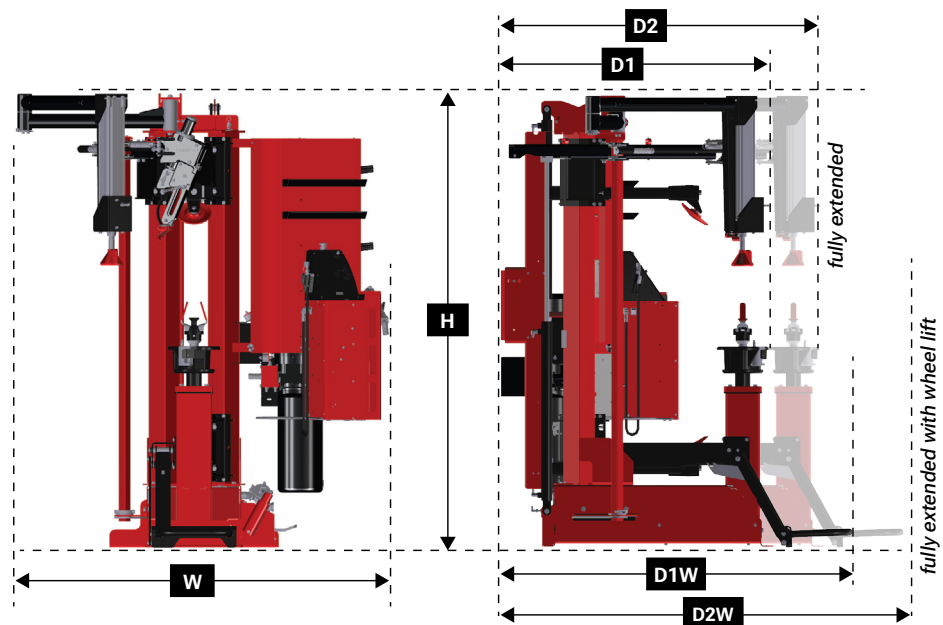

For tire changer information visit:
hunter.com/tire-changers

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848