

BENCH LATHES

BL Series Brake Lathes

HUNTER
Engineering Company


SPECIFICATIONS []



BL70E shown
with optional bench and hood

	BL10	BL70E (with ACT / Digi-Cal)
Power Requirements		
Domestic	115 V, 15 A, 50-60 Hz, 1ph	115 V, 15 A, 50-60 Hz, 1ph
Optional	220 V, 7.5 A, 50-60 Hz, 1ph	220 V, 7.5 A, 50-60 Hz, 1ph
International	220 V, 7.5 A, 50-60 Hz, 1ph	220 V, 7.5 A, 50-60 Hz, 1ph
Optional	115 V, 15 A, 50-60 Hz, 1ph	NA
	Base Model	With Anti-Chatter Technology
Rotor Diameter**	6-22 in. (152.4 - 584.2 mm)	6-22 in. (152.4 - 584.2 mm)
Rotor Max Width	5 3/8 in. (136.5 mm)	5 3/8 in. (136.5 mm)
Rotor Max Thickness	2 in. (50.8 mm)	2 in. (50.8 mm)
Drum Diameter**	6 - 24 in. (152.4 - 609.6 mm)	6 - 24 in. (152.4 - 609.6 mm)
Drum Max Width	8 in. (203.2 mm)	8 in. (203.2 mm)
Max Arbor Weight*	200 lbs (90.7 kg)*	200 lbs (90.7 kg)*
Motor	1.5 hp (1.12 kw)	1.5 hp (1.12 kw)
Spindle Speeds	85 / 110 / 175 rpm	85 / 110 / 175 rpm
Feed Rate	002 - .014 in. / rev (.05 - .36 mm/rev.) Infinitely Variable	002 - .014 in. / rev (.05 - .36 mm/rev.) Infinitely Variable

BL-	10E	10+	10+	70E	70E+	70E+
Tablet				✓	✓	✓
Rotor Capability	✓	✓	✓	✓	✓	✓
ACT / DigiCal 2.0				✓	✓	✓
Bench (Opt. Mobile Cabinet)		✓	✓		✓	✓
Dust Collection Hood			✓			✓
Std. Width (W) (Opt. Mobile Cabinet W)	48 in. (1219 mm)	43.5 in. (1105 mm) 54.5 in. (1384 mm)	48 in. (1219 mm) 54.5 in. (1384 mm)	43.5 in. (1105 mm)	45 in. (1143 mm) 54.5 in. (1384 mm)	48 in. (1219 mm) 54.5 in. (1384 mm)
Std. Height (H) (Opt. Mobile Cabinet W)	13 in. (330 mm)	75.5 in. (1918 mm) 46 in. (1168 mm)	75.5 in. (1918 mm) 54 in. (1143 mm)	13 in. (330 mm)	75.5 in. (1918 mm) 52 in. (1321 mm)	75.5 in. (1918 mm) 54 in. (1168 mm)
Std. Depth (D) (Opt. Mobile Cabinet D)	36.5 (927 mm)	41 in. (1041 mm) 43 in. (1092 mm)	53.5 in. (1359 mm) 45.7 in. (1161 mm)	36.5 (927 mm)	41 in. (1041 mm) 45.7 in. (1161 mm)	53.5 in. (1359 mm) 45.7 in. (1161 mm)

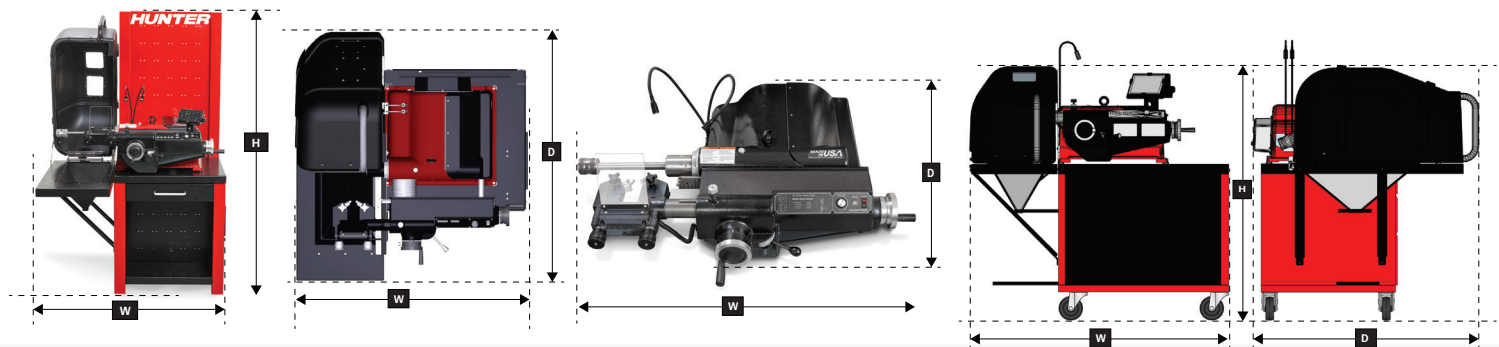

For balancer information visit:
hunter.com/brake-lathes

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call **800-448-6848**

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form LS07698-05, 05-25
Supersedes Form LS07698-05, 06-24
Copyright ©2025, Hunter Engineering Company