

QUICK CHECK® DRIVE

Inspection Live

HUNTER
Engineering Company

SPECIFICATIONS []



QCD1 (Pedestal Optional)

Power Requirements	115-230V, 15 Amp*, 50/60 Hz, 1 Ph **
Minimum Internet Speed with BDC	20 MBps download / 20 MBps upload (Ethernet cable required)
Processor	3.7 Ghz Intel Core i3
Memory	16 GB of DDR3 SDRAM
Hard Drive	250 GB Solid State Hard Drive (or greater)
DVD-RW/CD-RW Drive	Standard
Monitor Class - QCD92	22 in. Widescreen LCD touchscreen
Monitor Class - QCD72	24 in. Widescreen LCD
Operating System	Windows 10, 64 Bit
Unmanned Console	Standard
Printer (Optional)	HP Color Printer
Power Line Filter	Standard
Cable Length	75 ft. (22 m) per tower (Cat5e)
Test Entry Speed	2 - 8 mph (3 - 13 kph)
Minimum Required Light Condition	600 Lux
Productivity Tools	
Hunter QuickCheck® Software	Standard
Vehicle Specifications (30+ years)	Weekly Updates included with Inspection Live Subscription
HunterNet®	Standard
Quick Check Inspection Printout	Standard
Body Damage Cameras	Hardware Standard - Access included in Inspection Live Subscription
License to VIN Service (US & Canada Only)	Requires CARFAX EULA on File (US & Canada Only)

* Amperage shown is minimal circuit rating.

** Isolated Ground Recommended

For balancer information visit:
hunter.com/vehicle-inspection

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call **800-448-6848**

Because of continuing technological advancements, specifications, models and options are subject to change without notice.



Form QS07560-00, 08-25
Supersedes Form 7560-T, 06-24
Copyright ©2025, Hunter Engineering Company

QUICK CHECK® DRIVE

Autonomous Alignment and Tread Depth for the Service Drive

HUNTER
Engineering Company


DIMENSIONS []

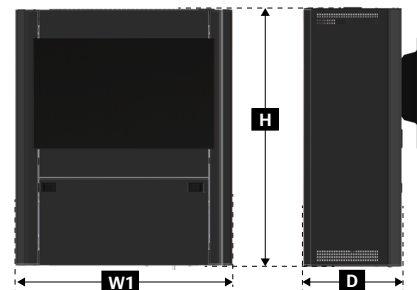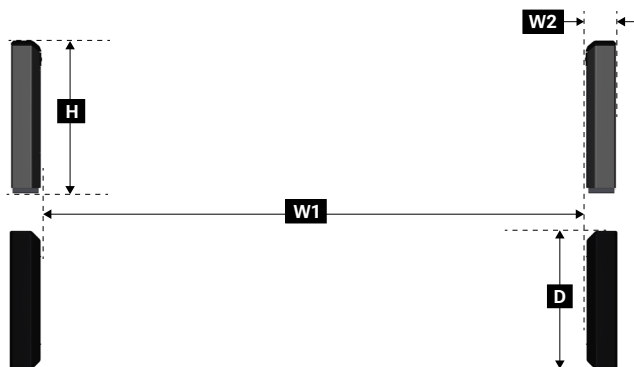


Domestic International	QCD Sensors	Cabinet LIVE1 & WU590E
Width 1 (W1)	126 - 156 in. (3200 - 3962 mm)	24 in. (610 mm)
Width 1 (W1) Medium Duty Hybrid	144 - 168 in. (3658 - 4267 mm)	24 in. (610 mm)
Width 2 (W2)	8 in. (203 mm)	-
Height (H)	41 in. (1041 mm)	28.5 in. (724 mm)
Height with optional pedestal	-	69.5 in. (1765 mm)
Depth (D)	37 in. (940 mm)	13.5 in. (343 mm)
Shipping Weight	140 lbs (per tower) (64 kg)	155 lbs (70 kg)

OPTIONAL IN-GROUND CONDUIT SPECIFICATIONS


PEDESTAL



TOWER ONE

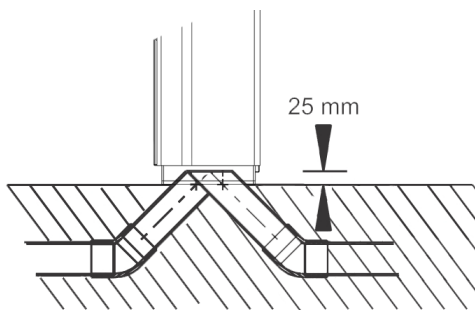

TOWER TWO

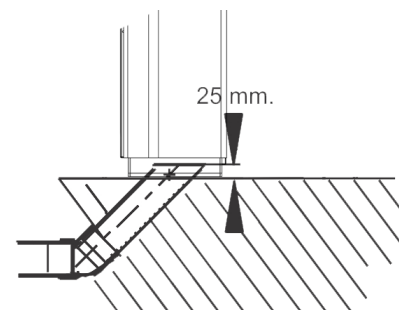

ROUTE 51 MM MIN. DIAMETER
CONDUITS (OR EQUIVALENT
CLOSED CHANNEL) AS SHOWN.

ROUTE CONDUIT FROM CONSOLE TO FIRST TOWER.
ROUTE A SECOND CONDUIT FROM FIRST TOWER
TO SECOND TOWER.

CONDUIT UNDER
SECOND TOWER:
25 MM ABOVE GROUND

* 51 mm (2 in.) conduit recommended throughout installation.

Hunter strongly recommends placing protective bollards to prevent accidental vehicle impacts on Quick Check Drive DRV-1 sensor towers.

For alignment information visit:
hunter.com/vehicle-inspection

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form QS07560-00, 08-25
Supersedes Form 7560-T, 06-24
Copyright ©2025, Hunter Engineering Company