

RX63L & RX72L Scissor Lifts

New, longer runways!

NEW



RX63L/72L Scissor Lifts

*Massive capacity
with a small footprint*

STANDARD

Extra-wide runways



- ✓ 660 mm (26 in.) runways accept wide, heavy vehicles

PATENTED

Sensor feedback system*



- ✓ Sensors keep runway level
- ✓ Safely stops if obstructed


STANDARD

Unmatched Safety Systems




- ✓ Velocity fuses instantly stop lift in event of hydraulic failure
- ✓ Precision-fit teeth lock runways at 16 level height positions

Low drive-on and high raise height

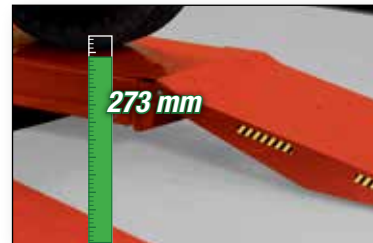

- ✓ Only 273 mm (10.75 in.) fully lowered
- ✓ Reduces clearance issues



- ✓ Comfortable 1828 mm (72 in.) maximum height



Stainless steel turnplates

- ✓ Maximum corrosion resistance for long life
- ✓ Optional PowerSlide® turnplates (shown) lock/unlock automatically
- ✓ Optional stainless steel slipplates



- ✓ Adjustable turnplate locations give 2235-4267 mm (88-168 in.) four-wheel alignment capability

* Shown with protective cover removed

STANDARD


Two Swing Air Jacks



- ✓ 4080-kg (9000-lb.) capacity
- ✓ Technicians' favorite

EXCLUSIVE

Louvered ramps

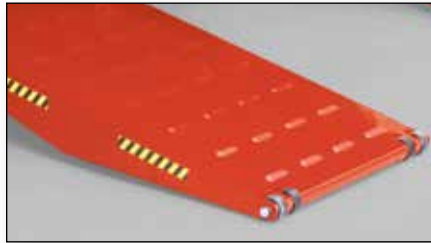

- ✓ Prevent wheel spin in wet conditions
- ✓ More effective than diamond tread or abrasive strips

PATENTED

Control panel



- ✓ Complete operation from the console
- ✓ Optional PowerSlide®, Inflation Station and FIA control



RX63KLIS shown with optional light kit and stainless steel slipplates

EXCLUSIVE

Movable work steps



- ✓ 10 secure positions
- ✓ Lightweight design

PATENTED OPTIONAL

Inflation Station



- ✓ Automatically fills or bleeds each tire
- ✓ No dangling air lines

NEW! Longer runways



- ✓ 4953 mm (195 in.) two-wheel alignment capable
- ✓ Rolling compensation for more trucks/vans

Exclusive features, enhanced capabilities

EXCLUSIVE

Fast descent speed

- ✓ 50% faster lowering times
- ✓ Ensures a soft landing by automatically slowing the last several inches

**FAST
descent**

0:25

0:50

Others



STANDARD

Swing Air Jacks

- ✓ Lift vehicles off the runways during alignment procedures and other multi-service operations
- ✓ 4082-kg (9,000-lb.) capacity
- ✓ Folding design provides lowest profile

133-84-1 — 4082-kg (9,000-lb.) capacity Swing Air Jack

EXCLUSIVE

RX72KL flush-mount

- ✓ Accommodate lowered vehicles or expensive spoilers
- ✓ Ideal for “showcase” shops
- ✓ Drive-thru capability



OPTIONAL

Extend your service life with enhanced corrosion protection

- ✓ Zinc-rich-primed, powder-coated and caulked runways
- ✓ Zinc-rich-primed and powder-coated bases and ramps
- ✓ Stainless steel slipplates and turnplates



Available in red (-PRR) or black (-PRB) only

Powerslide® turnplate used on PS and IS models shown



EXCLUSIVE **OPTIONAL**

AlignLights system

- ✓ Bright and efficient LED light source underneath the vehicle
- ✓ Automatically turns on when the lift is raised and turns off when the lift is lowered to the floor
- ✓ AlignLights is an ALI-listed accessory

20-3438-1 — AlignLights system



OPTIONAL

Approach ramp extensions

Extensions lessen the ramp incline for high-floor-slope installs and ease of service for specialty vehicles.



432 mm (17 in.) kit – 20-3113-1
Adds 127 mm (5 in.) to RX63K



1270 mm (50 in.) kit* – 20-2189-1
Adds approximately 965 mm (38 in.) to RX63K

Drive-thru conversion*



1320 mm (52 in.) kit
20-2498-1 For camera sensors


* Quick-release pins included.

FIA Fully Integrated Alignment



FIA streamlines the entire alignment process.

Rack to aligner links automate tasks once performed by the technician manually, eliminating time-consuming trips around the vehicle and to-and-from the console.

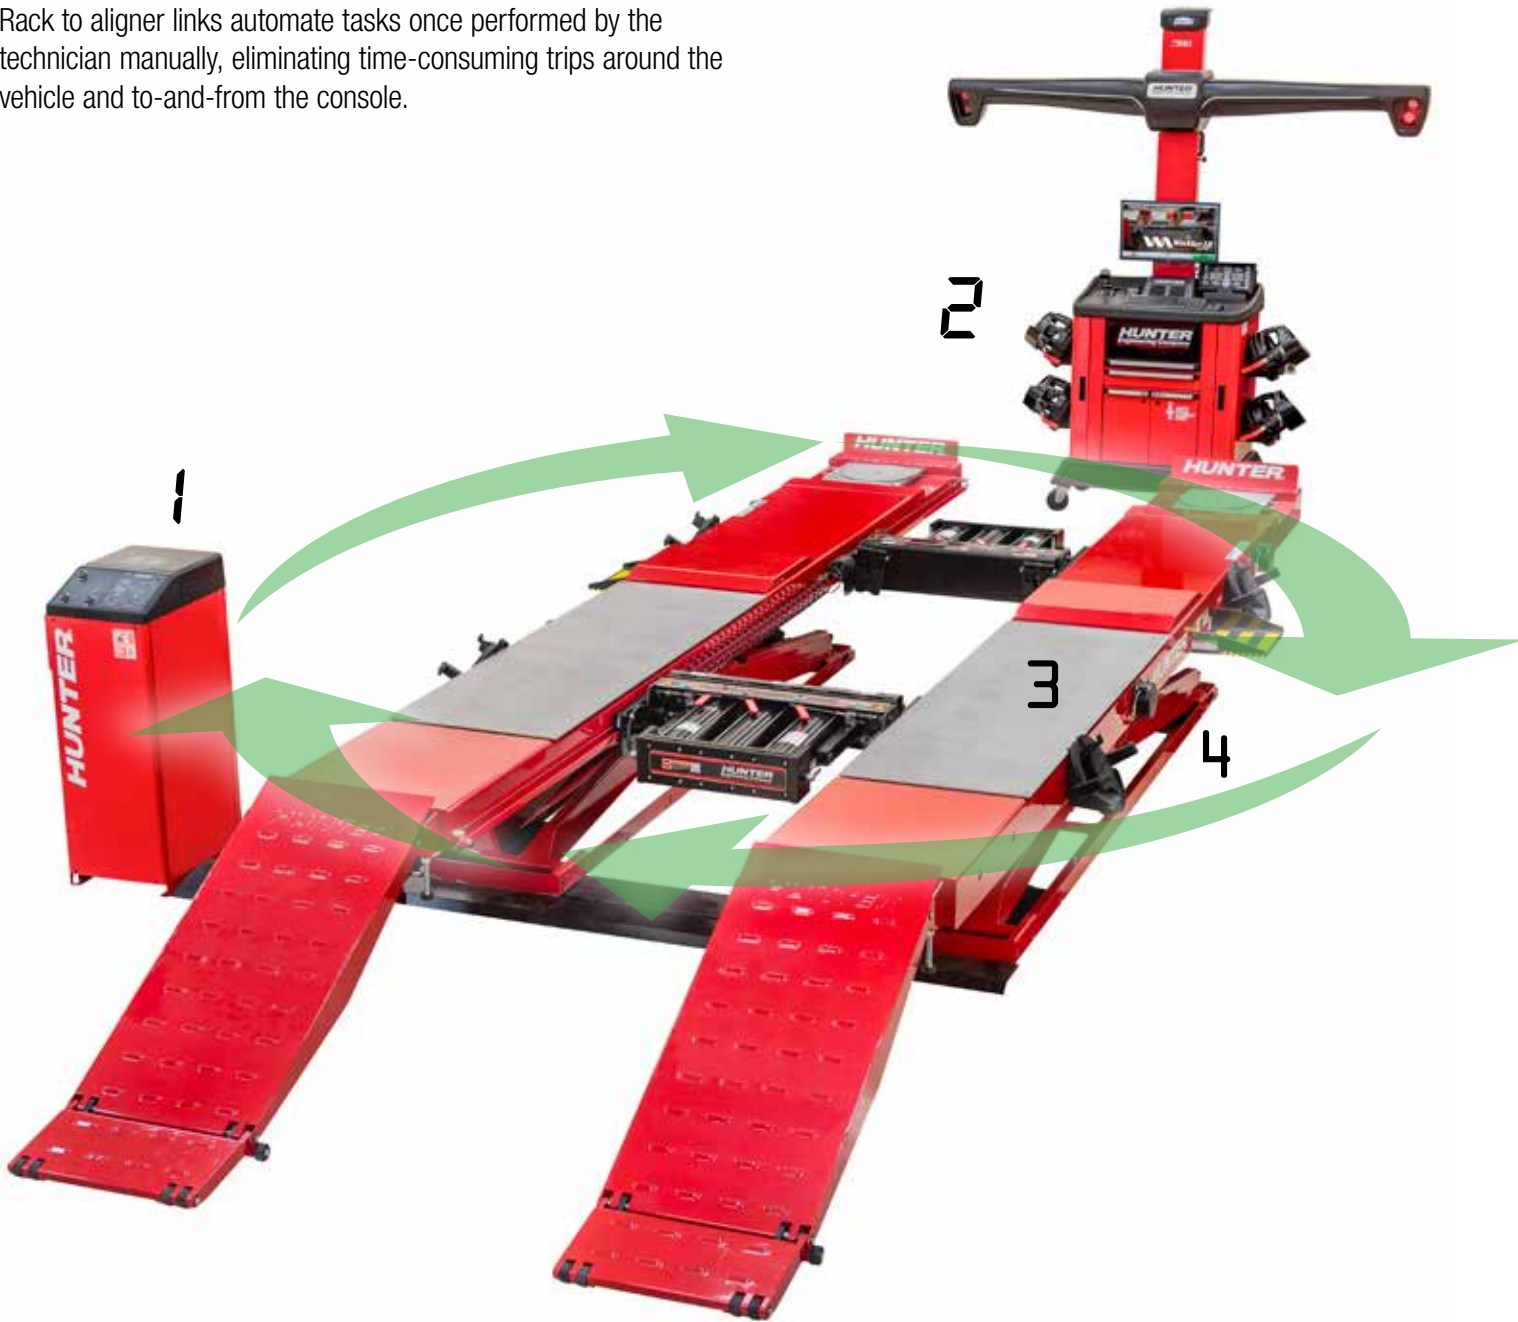

Shown with optional aligner console, sensors, bar code reader, target support brackets, and lights




PATENTED

PowerSlide® edition


- ✓ Locks slipplates and turnplates with the touch of a button or automatically through an FIA-equipped aligner*
- ✓ No more struggles with lock pins
- ✓ Avoid wear and tear and extend the life of your turnplates



STANDARD

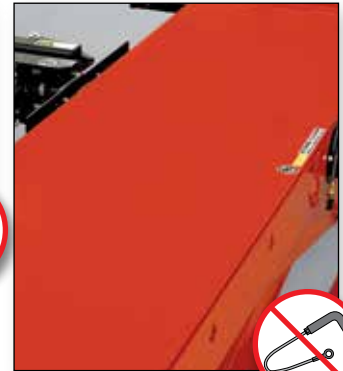


STANDARD

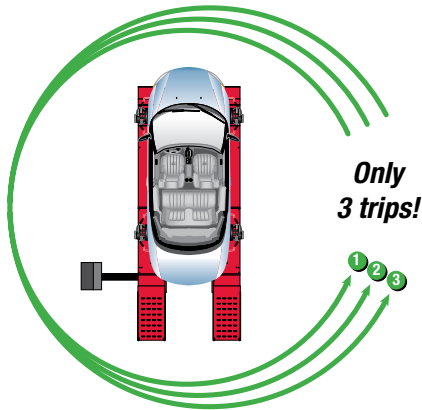

Minimize trips around the car

- 1 Mount targets
- 2 Make adjustments
- 3 Remove targets
- 4 Jack vehicle and compensate sensors
- 5 Lower leveling legs (if equipped)
- 6 Remove slipplate and turnplate pins
- 7 Replace slipplate and turnplate pins
- 8 Raise leveling legs (if equipped)


Yesterday's technology

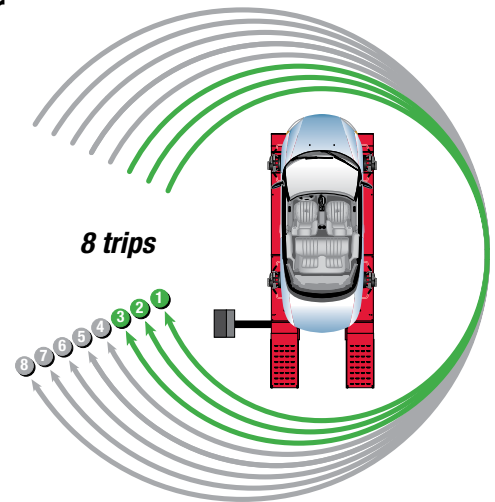

PATENTED

Inflation Station edition

- ✓ Includes PowerSlide® slipplates and turnplates
- ✓ Automatically inflate all four tires simultaneously
- ✓ Record starting and final pressure*
- ✓ Hose recoils to keep work area clear

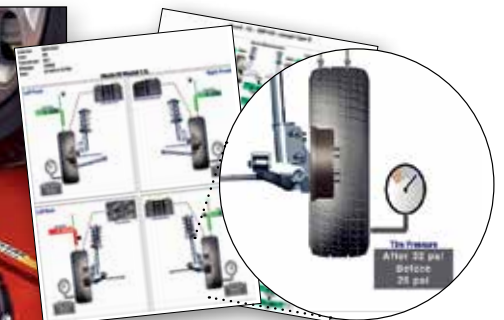

Printouts show starting and final tire pressures.


* Requires FIA equipped aligner with WinAlign® 10.x software or greater

Specifications

	Flush-mount RX72KLF	Surface-mount RX63KL
Max. vehicle weight	7200 kg (16,000 lbs.)	6300 kg (14,000 lbs.)
Max. wheelbase		
General service	5105 mm (201 in.)	4750 mm (187 in.)
Two-wheel alignment	4953 mm (195 in.)	4623 mm (182 in.)
Four-wheel alignment	4267 mm (168 in.)	4013 mm (158 in.)
Min. four-wheel alignment	2235 mm (88 in.)	
Lowered height	N/A	273 mm (10.75 in.)
Max. lifting height	1778 mm (70 in.)	1828 mm (72 in.)
Alignment height	All lock positions	
Runway width	660 mm (26 in.)	
Tread width		
Min. inside	1016 mm (40 in.)	
Max. outside	2350 mm (92.5 in.)	
Air supply requirements	9-10.3 bar (130-150 psi)*	
Speed	Lifting: 1 speed, 60 seconds Lowering: 2 speed, 25 seconds	

* 8.6 bar (125 psi) required for full jack capacity

RX63KL Plan View

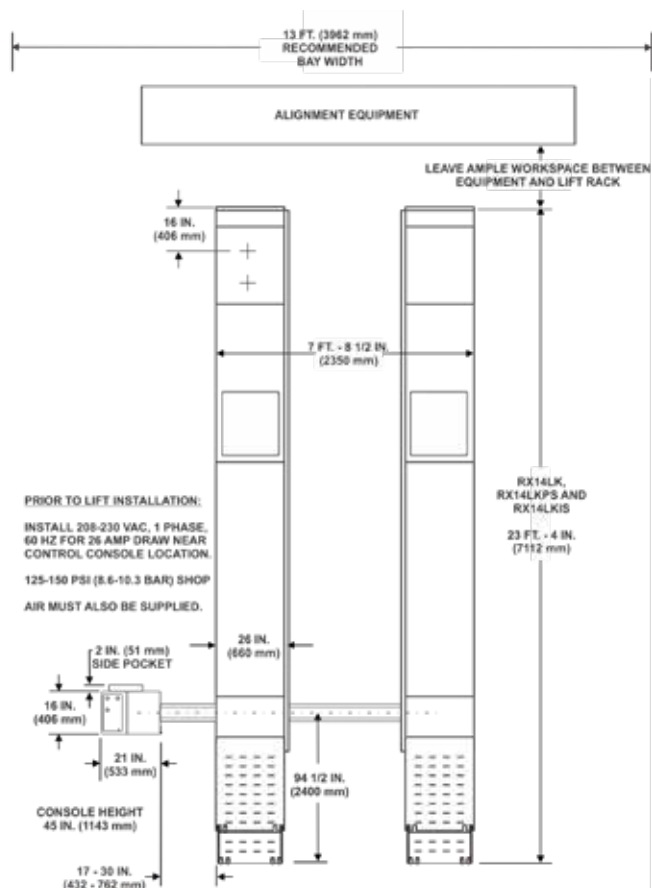

Contact your local Hunter Representative for details on site requirements.

Models

	RX72KLFIS	RX63KLIS	RX72KLFPS	RX63KLPS
4082-kg (9,000-lb.) Swing Air Jacks	✓	✓	✓	✓
Two-speed lowering	✓	✓	✓	✓
Fully Integrated Alignment	✓	✓	✓	✓
PowerSlide® slippates and turnplates	✓	✓	✓	✓
Inflation Station	✓	✓		
Flush-mounted	✓		✓	

Add one of the following suffixes to the model number for desired power configuration (ex. RX63KLIS-435E):

Suffix	Power configuration
-215E	208/230V, 1PH, 50Hz
-216E	208/230V, 1PH, 60Hz
-435E	208/230/400/460V, 3PH, 50Hz

Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and WinAlign are registered trademarks of Hunter Engineering Company. The PowerSlide logo is a trademark of Hunter Engineering Company.



Be sure to check out other Hunter literature for more quality products from Hunter Engineering.

HUNTER

Engineering Company

www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044, USA
Tel: +1-314-731-3020, Fax: +1-314-731-0132
Email: international@hunter.com