


# RX55KFPS

Flush Mount Lift Rack

## SPECIFICATIONS [ ]

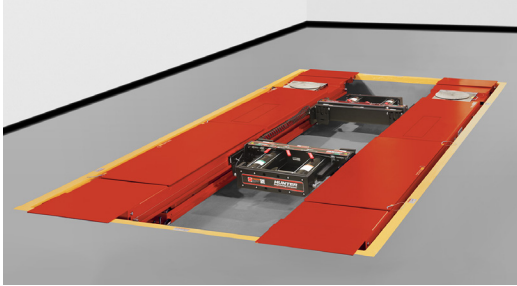


**RX55KFPS (Jacks Optional)**

<b>Floor Pocket Requirements</b>	Refer to 7511-TE for details
<b>Power Requirements</b>	
215E	200/208/230 VAC, 1 phase, 50Hz, 26 Amp
216E	200/208/230 VAC, 1 phase, 60Hz, 26 Amp
435E	208/230/400/460 VAC, 3 phase, 50Hz, 18 Amp (208/230) / 9 Amp (400/460)
<b>Air Supply Requirements</b>	130 - 150 psi (9 - 10.3 bar)
<b>Minimum Concrete Spec.</b>	3 in. (76 mm) thick, 3000 psi (20,700 kPa) rating
<b>Maximum Floor Slope</b>	2 in. (51 mm) over 126 in. (3200 mm)
<b>Max Vehicle Weight</b>	12,000 lbs. (5500 kg)
<b>Alignment Height</b>	All lock positions
<b>Min. Four-Wheel Alignment</b>	88 in. (2235 mm)
<b>Lifting Speed</b>	1 speed, 55 seconds
<b>Lowering Speed</b>	2 speed, 25 seconds
<b>Max. Wheelbase</b>	
General Service	180 in. (4572 mm)
Two-Wheel Alignment	175 in. (4445 mm)
Four-Wheel Alignment	158 in. (4013 mm)

Feature	std.	opt.
6000-lb Swing Air Jacks (2)		✓
Two-Speed Lowering	✓	
<b>FIA</b> Fully Integrated Alignment	✓	
<b>POWER SLIDE</b>	✓	
<b>INFLATION STATION</b>		

Dimension	
Outside Width (W1)	88.5 in. (2248 mm)
Inside Width (W2)	40 in. (1016 mm)
Length (L)	228.375 in. (5801 mm)
Deck Length (DL)	213.5 in. (5426 mm)
Runway Width (R)	24 in. (610 mm)
Raised Height (H1)	71 in. (1803 mm)
Stack Height (H2)	10.5 - 11.5 in. (267 - 292 mm)

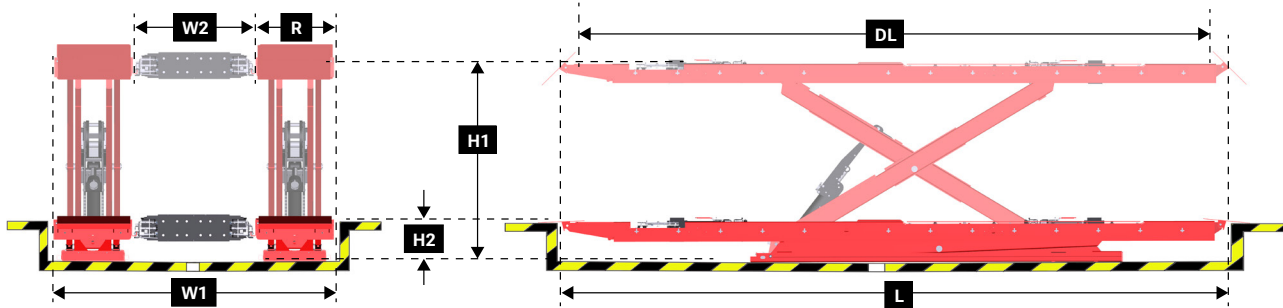

For lift rack information visit:  
[hunter.com/alignment-racks](http://hunter.com/alignment-racks)

For local contact visit:  
[hunter.com/contact](http://hunter.com/contact)


For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

# RX55KFPS

Flush Mount Lift Rack



## LAYOUT DIAGRAM (refer to 7511-TE-05 for construction drawings)

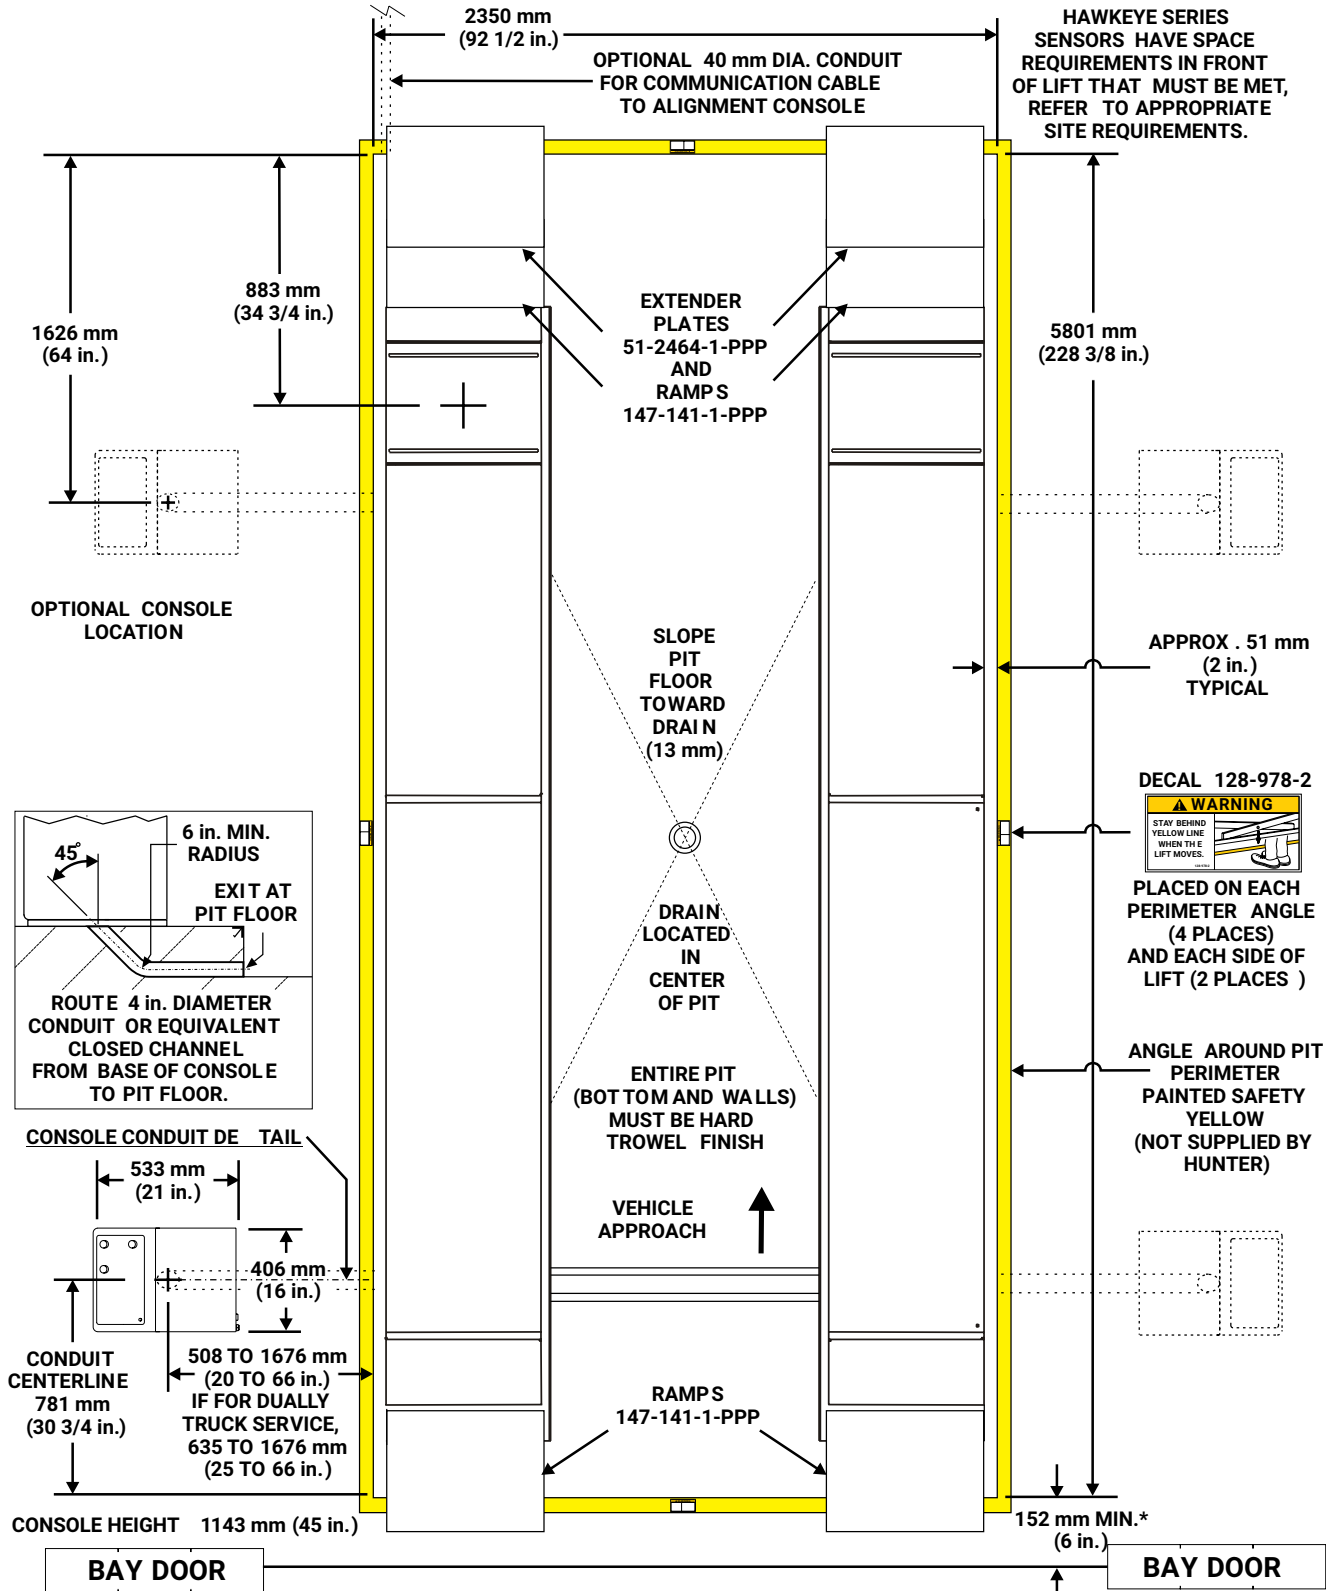

\* LONGER VEHICLES WILL NEED TO BE SERVICED WITH THE BAY DOOR OPEN. TO ACCOMMODATE MOST VEHICLES, INCREASE THE CLEARANCE BEHIND THE PIT TO 200 mm (8 in.) OR GREATER

Dimensions shown are for end result. Tile thickness (if applicable) must be considered before pouring concrete. Positioning of control console is limited to a maximum space between console and rack of 1676 mm (66 in.) at the approach ramp end and 4877 mm (192 in.) at the turnplate end.