## RX14 KL, KLPS & KLIS

**Surface Mount Lift Rack** 



## SPECIFICATIONS []




Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	130 - 150 psi (9 - 10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 psi (20,700 kPA) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)
Max Vehicle Weight	14,000 lbs. (6300 kg)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed, 60 seconds
Lowering Speed	2 speed, 25 seconds
Max Wheelbase	
General Service	201 in. (5105 mm)
Two-Wheel Alignment	195 in. (4953 mm)
Four-Wheel Alignment	168 in. (4267 mm)

Feature	KL	KLPS	KLIS
9000-lb Swing Air Jacks (2)	~	<	~
Two-Speed Lowering	~	~	~
Fully Integrated Alignment		~	•
FOWER SLIDE		~	~
INFLATION STATION			~

	Dimension
Outside Width (W1)	92.5 in. (2350 mm)
Inside Width (W2)	40 in. (1016 mm)
Length (L)	280 in. (7112 mm)
Elevated Length (L2)	255 in. (6464 mm)
Runway Width (R)	26 in. (660 mm)
Raised Height (H1)	72 in. (1829 mm)
Stack Height (H2)	10.75 in. (273 mm)

Options	Add Length	Kit#
Approach Ramp Extensions (Back)	5 in. (127 mm)	20-3113-1
Approach Ramp Extensions (Back)	37 in. (940 mm)	20-2189-1
Drive-Thru Kit (Front)	53 in. (1346 mm)	20-2498-1

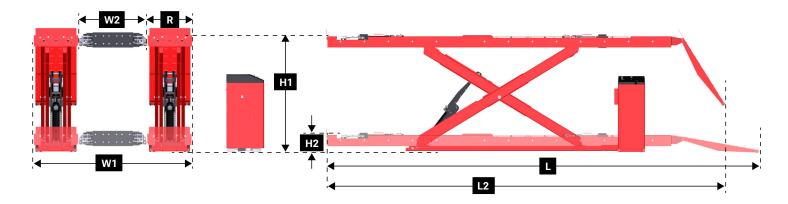

For lift rack information visit: hunter.com/alignment-racks

For local contact visit: hunter.com/contact


For general inquiries visit: www.hunter.com or call 800-448-6848

## RX14 KL, KLPS & KLIS

Surface Mount Lift Rack



## LAYOUT DIAGRAM

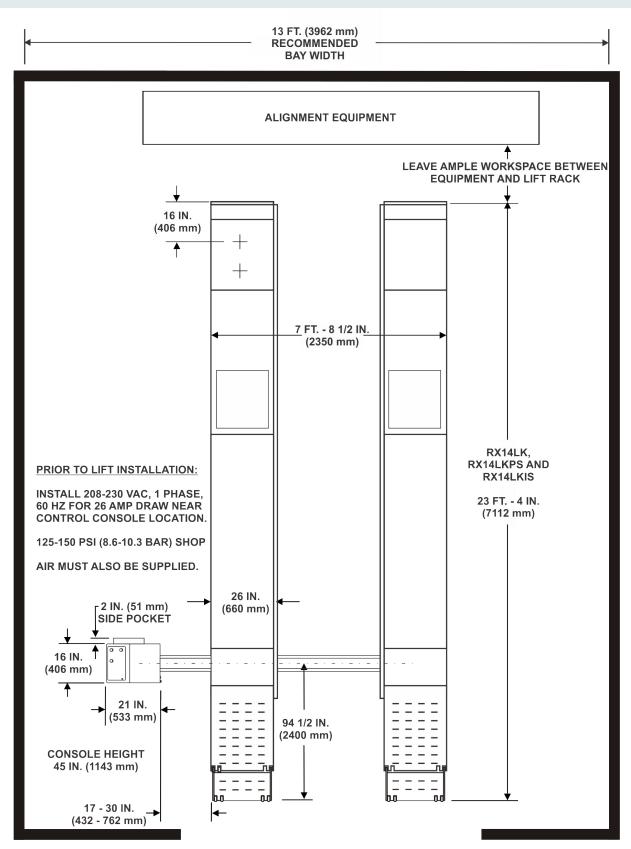

<sup>\*</sup> Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 16.5 feet (5029 mm) at the turnplate end. Additional threshold and perhaps hydraulic hoses will be required (refer to Installation Instruction for details).