


RX16KLF & RX16KLFPS

Flush Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS

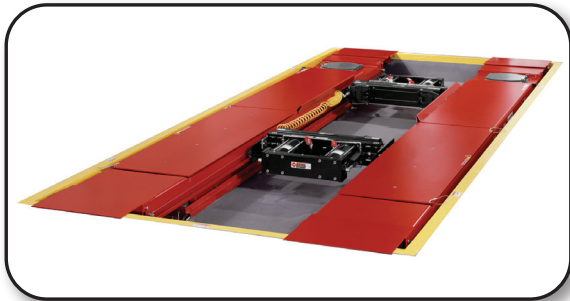

RX16KLFPS Shown

Site Specifications

Floor Pocket Requirements	Refer to RF08114-00 for full details
Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	130-150 PSI (9-10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700kPA) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)


Product Specifications

Max. Vehicle Weight	16,000 lbs. (7200 kg)
Max. Wheelbase	
General Service	201 in. (5105 mm)
Two-Wheel Alignment	195 in. (4953 mm)
Four-Wheel Alignment	168 in. (4267 mm)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed, 60 seconds
Lowering Speed	2 speed, 25 seconds

MODEL FEATURES / DIMENSIONS

Features	KLF	KLFPS
9000-lb Swing Air Jacks (2)	✓	✓
Two-Speed Lowering	✓	✓
FIA Fully Integrated Alignment		✓
POWER SLIDE		✓
INFLATION STATION		

Dimension	
Outside Width (W1)	92.5 in. 2350 mm
Inside Width (W2)	40 in. 1016 mm
Length (L)	237 in. 6020 mm
Runway Width (R)	26 in. 660 mm
Raised Height (H1)	70 in. 1778 mm
Depth (H2)	12.5 to 13 in. 318 to 330 mm

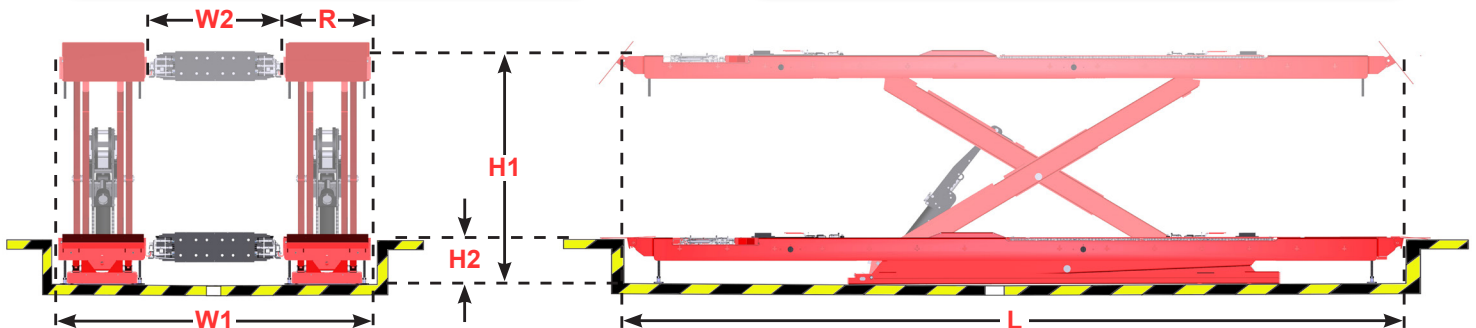

Continued on Page 2

For lift rack information visit:
www.hunter.com/alignment-racks

For general inquiries visit:
www.hunter.com
or call
314-731-0000


For local contact visit:
www.hunter.com/contact

RX16KLF & RX16KLFPS

Flush Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS (Refer to RF08114-00 for construction drawings.)

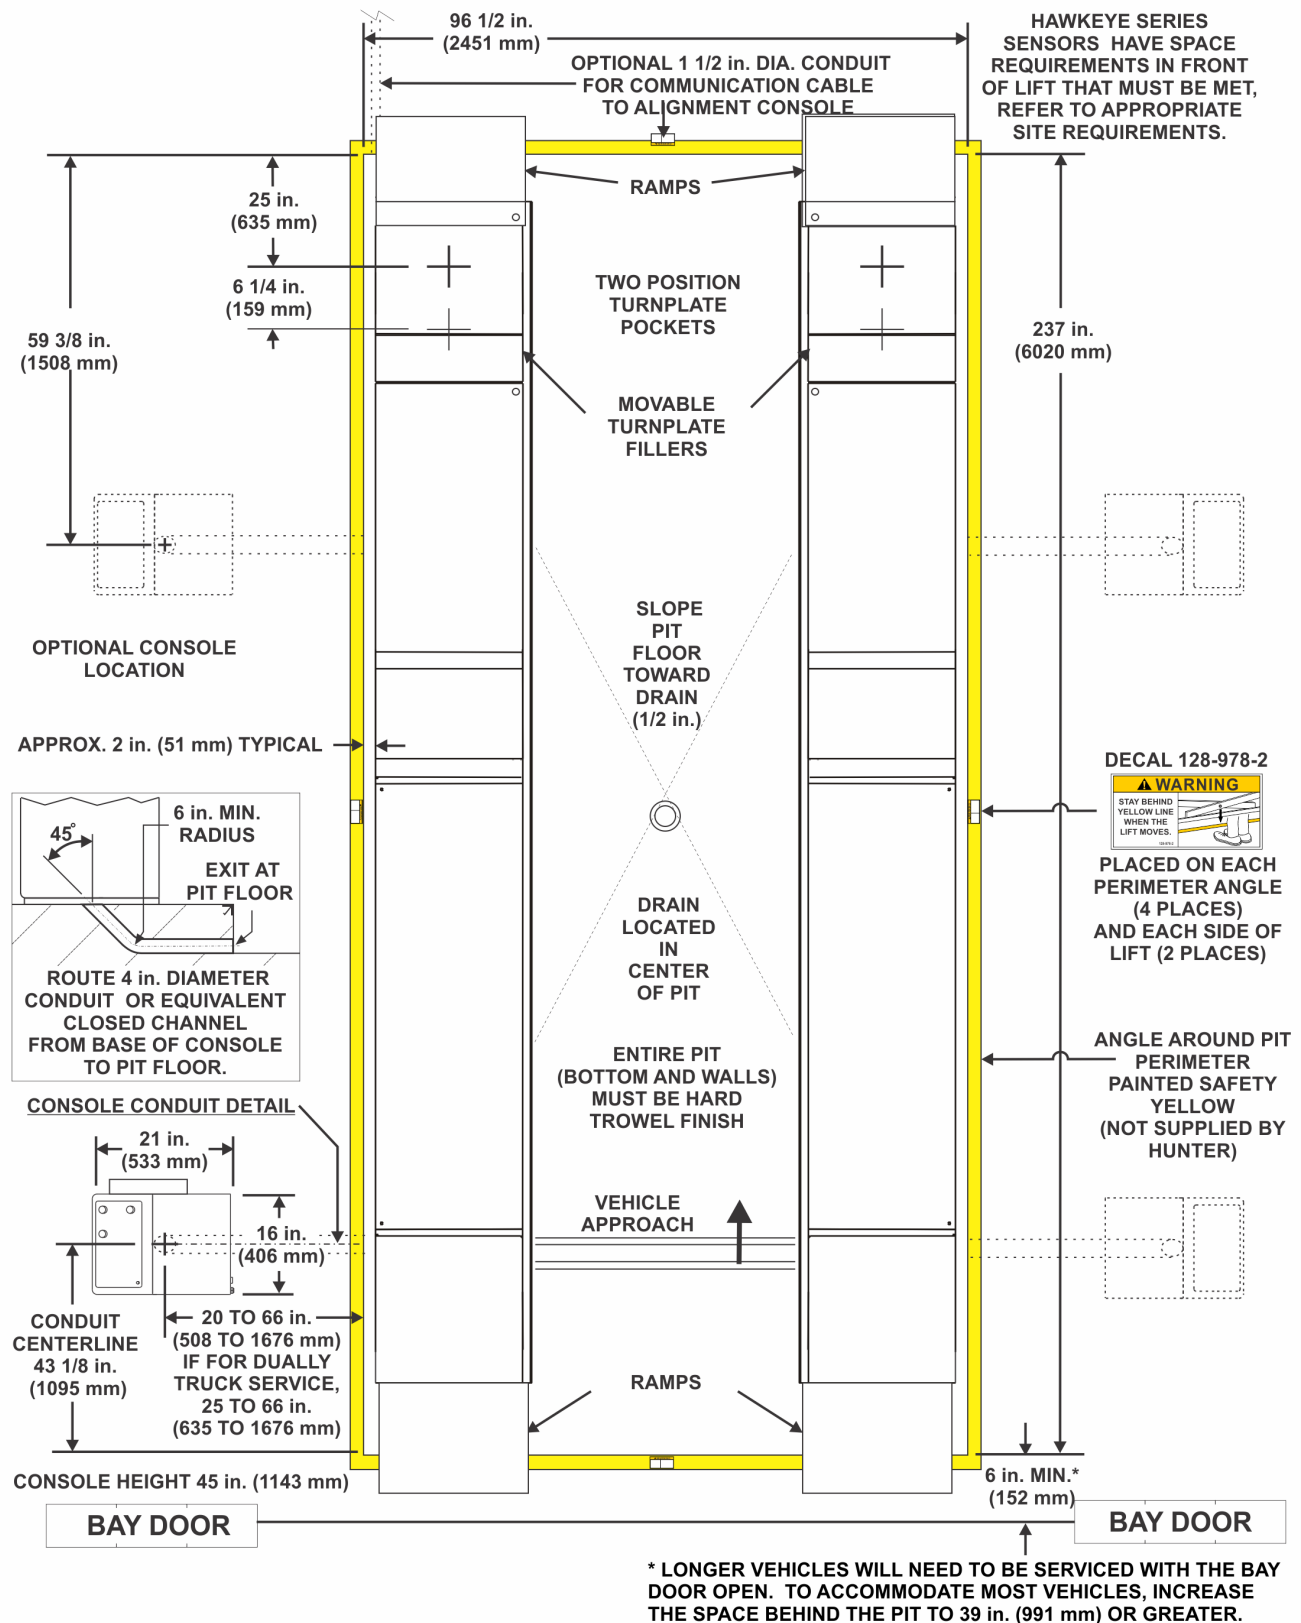

Dimensions shown are for end result. Tile thickness (if applicable) must be considered before pouring concrete. Positioning of control console is limited to a maximum space between console and rack of 5 1/2 feet (1676 mm) at the approach ramp end and 16 feet (4877 mm) at the turnplate end.