

RX63KLPS & RX63KLIS

Surface Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS



RX63KLIS Shown (jacks optional)

Site Specifications

Air Supply Requirements	9-10.3 bar (130-150 PSI)
Minimum Concrete Spec.	76 mm (3 in.) thick, 20,700 kPa (3000 PSI) rating
Maximum Floor Slope	51 mm (2 in.) over 3200 mm (126 in.)

Product Specifications


Max. Vehicle Weight	6300 kg (14,000 lbs.)
Max. Wheelbase	
General Service	4750 mm (187 in.)
Two-Wheel Alignment	4623 mm (182 in.)
Four-Wheel Alignment	4013 mm (158 in.)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	2235 mm (88 in.)
Lifting Speed	1 speed, 60 seconds
Lowering Speed	2 speed, 25 seconds

Power Requirements (for available models)

215E	200/208/230 VAC, 1 phase, 50 HZ, 26 Amp
216E	200/208/230 VAC, 1 phase, 60 HZ, 26 Amp
435E	208/230/400/460 VAC, 3 phase, 50 HZ, 18 Amp (208/230) / 9 Amp (400/460)

MODEL FEATURES / DIMENSIONS / OPTIONS

Features	PS	IS	opt.	Dimensions		Options	Add Length	Kit #
Fully Integrated Alignment	☑	☑		Width (W1)	2350 mm 92.5 in.	Approach Ramp Extensions (Back)	127 mm 5 in.	20-3113-1
POWER SLIDE	☑	☑		Inside Width (W2)	1016 mm 40 in.	Approach Ramp Extensions (Back)	940 mm. 37 in.	20-2189-1
INFLATION STATION		☑		Length (L)	7112 mm 280 in.	Conventional Sensor Extensions (Front)	305 mm 12 in.	20-2497-1
Two-Speed Lowering	☑	☑		Elevated Length (L2)	6172 mm 243 in.	Drive-Thru Kit (Front)	1346 mm 53 in.	20-2498-1
9000-lb Swing Air Jacks (2)			opt.	Runway Width (R)	660 mm 26 in.			
				Raised Height (H1)	1829 mm 72 in.			
				Stack Height (H2)	273 mm 10.75 in.			

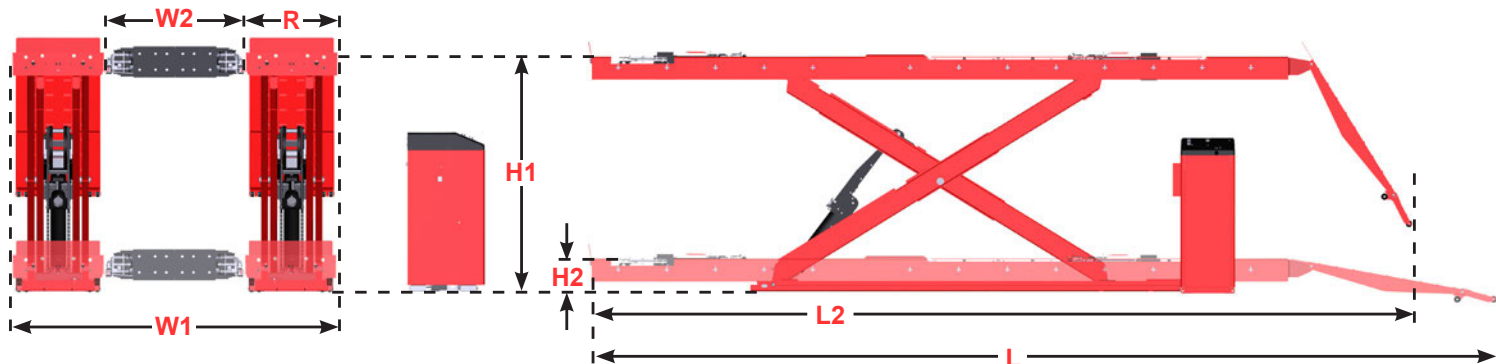

Continued on Page 2

For lift rack information visit:
www.hunter.com/lift-racks


For general inquiries visit:
www.hunter.com/internat/countries.cfm

RX63KLPS & RX63KLIS

Surface Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS (Refer to RF08166-05 for construction drawings)

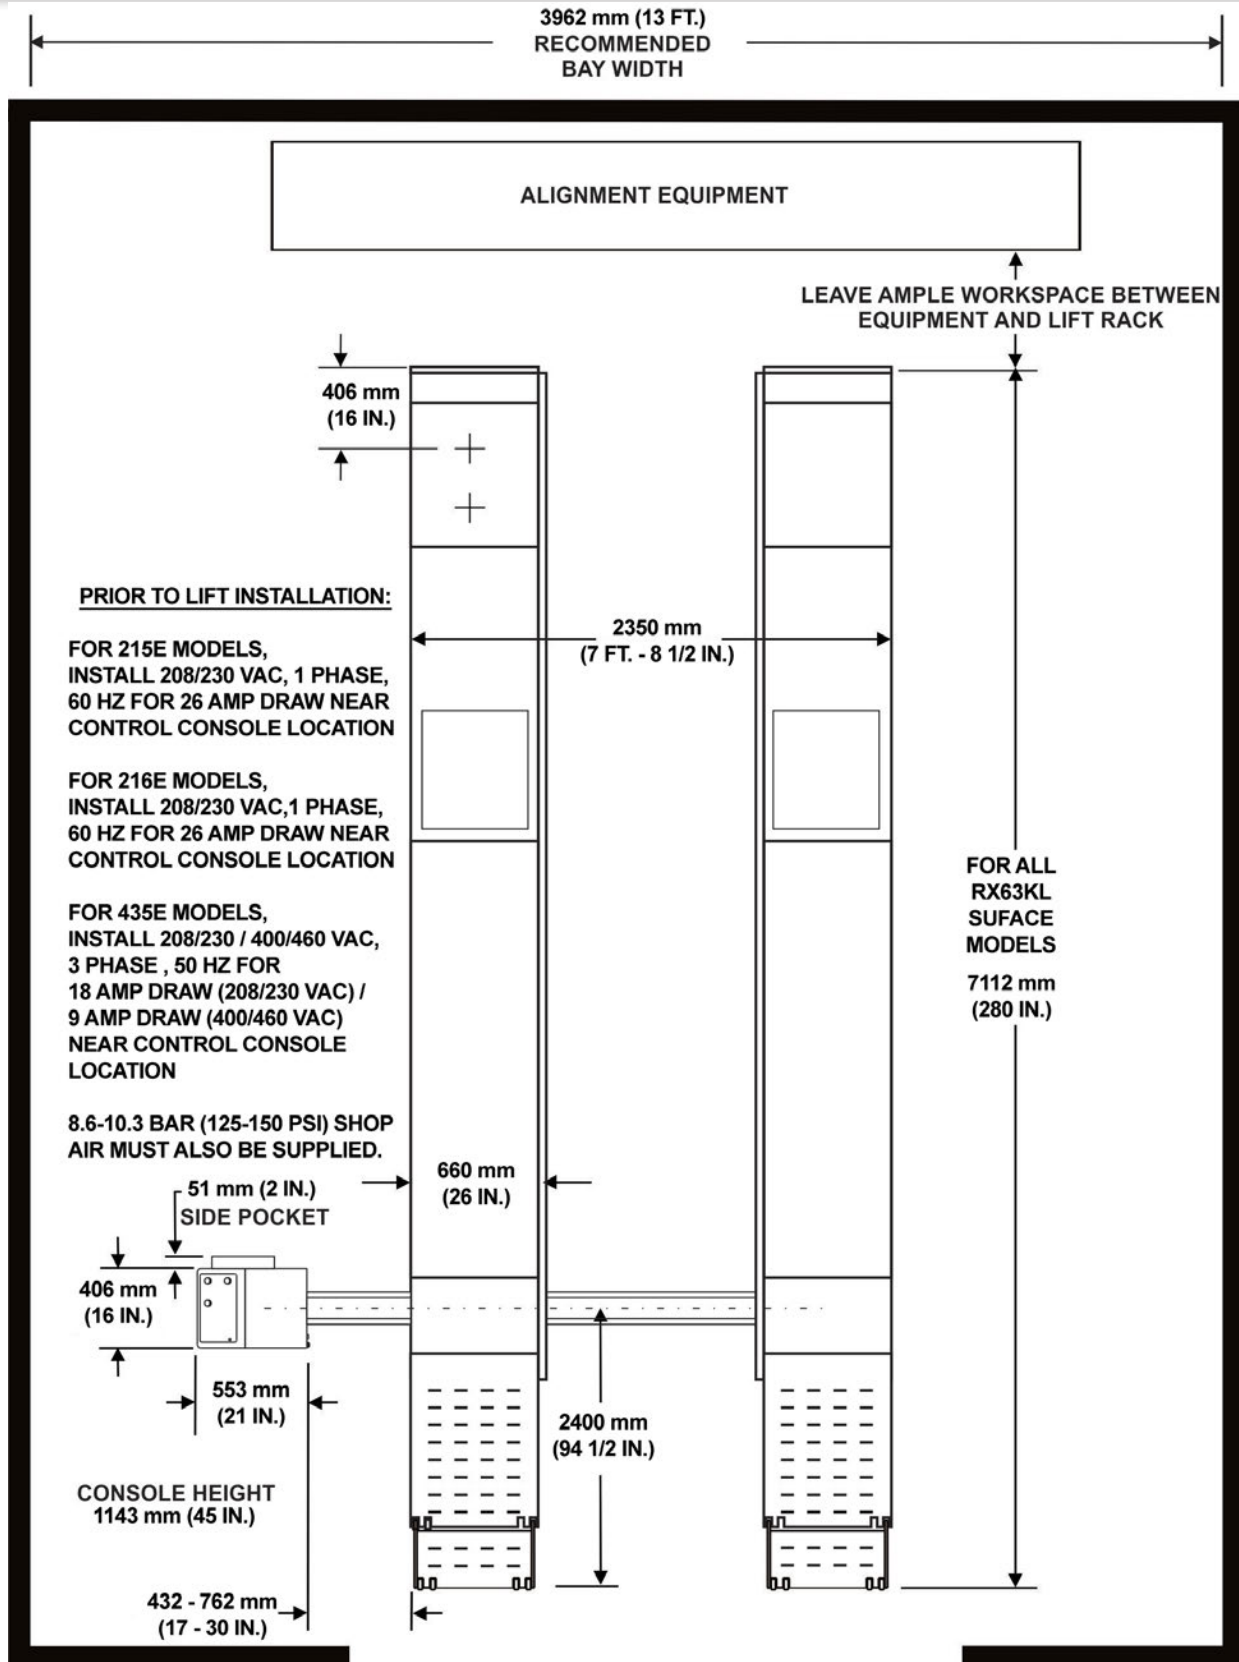

*Non-standard positioning of control console is limited to a maximum space between console and rack of 1829 mm (6 feet) at the approach ramp end and 5029 mm (16.5 feet) at the turnplate end. Additional threshold and perhaps hydraulic hoses will be required (refer to Installation Instruction for details).