

RX72KLFPS

Flush Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS



RX72KLFPS Shown (jacks optional)

Power Requirements (for available models)

| | |
|------|---|
| 215E | 200/208/230 VAC, 1 phase, 50 HZ, 26 Amp |
| 216E | 200/208/230 VAC, 1 phase, 60 HZ, 26 Amp |
| 435E | 208/230/400/460 VAC, 3 phase, 50 HZ, 18 Amp (208/230) / 9 Amp (400/460) |




Site Specifications (Refer to 7514-TE for full site requirements)

| | |
|-------------------------|---|
| Air Supply Requirements | 9-10.3 bar (130-150 PSI) |
| Minimum Concrete Spec. | 76 mm (3 in.) thick, 20,700 kPa (3000 PSI) rating |
| Maximum Floor Slope | 51 mm (2 in.) over 3200 mm (126 in.) |


Product Specifications

| | |
|---------------------------|-----------------------|
| Max. Vehicle Weight | 7200 kg (16,000 lbs.) |
| Max. Wheelbase | |
| General Service | 5105 mm (201 in.) |
| Two-Wheel Alignment | 4953 mm (195 in.) |
| Four-Wheel Alignment | 4267 mm (168 in.) |
| Alignment Height | All lock positions |
| Min. Four-Wheel Alignment | 2235 mm (88 in.) |
| Lifting Speed | 1-speed 60 seconds |
| Lowering Speed | 2-speed, 25 seconds |

MODEL FEATURES / DIMENSIONS

| Features | std. | opt. |
|---|------|------|
|  | ✓ | |
|  | ✓ | |
|  | | |
| 2-Speed Lowering | ✓ | |
| 9000-lb Swing Air Jacks | | opt. |

| Dimension | |
|--------------------|---------------------------------|
| Outside Width (W1) | 2451 mm 96.5 in. |
| Inside Width (W2) | 1016 mm 40 in. |
| Length (L) | 6020 mm 237 in. |
| Runway Width (R) | 660 mm 26 in. |
| Raised Height (H1) | 1778 mm 70 in. |
| Depth (H2) | 318 to 330 mm 12.5 to 13 in. |

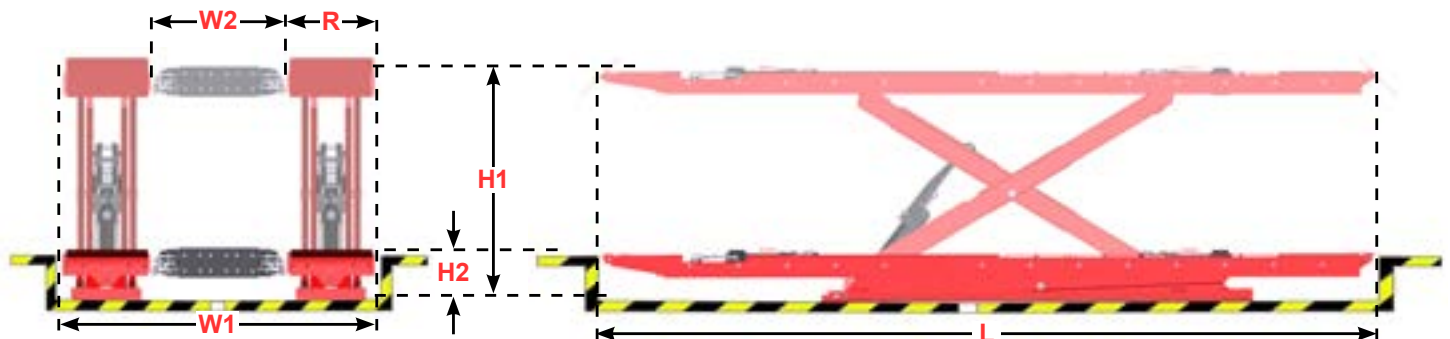

For lift rack information visit:
www.hunter.com/alignment-racks

For local contact visit:
hunter.com/hunter-international

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.


Form RS08162-00, 09-23a
Supersedes Form RS08162-00, 09-23
Copyright © 2023-2024, Hunter Engineering Company

RX72KLFPS

Flush Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS (Refer to RF08165-05 for construction drawing)

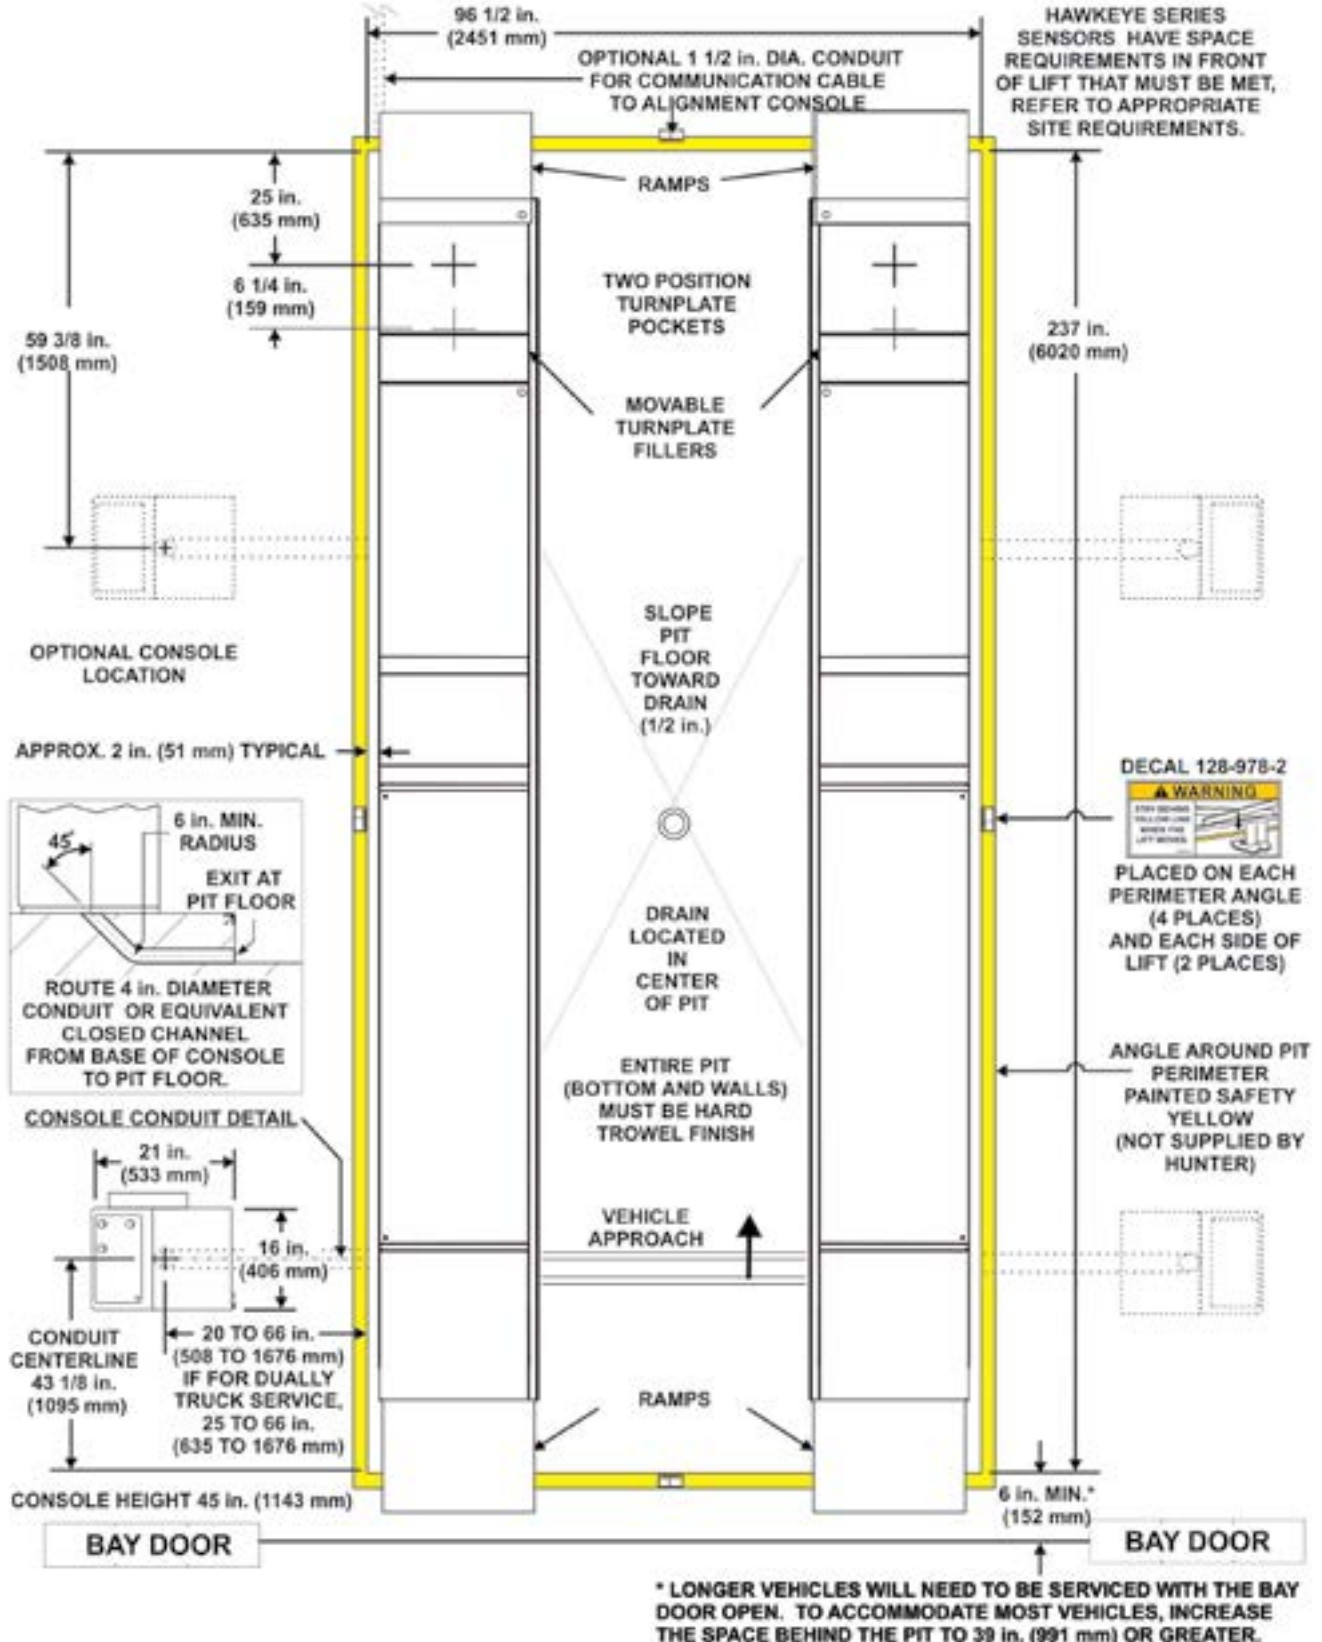

Dimensions shown are for end result. Tile thickness (if applicable) must be considered before pouring concrete. Positioning of control console is limited to a maximum space between console and rack of 1676 mm (66 in.) at the approach ramp end and 4877 mm (192 in.) at the turnplate end.