
HAWKEYE® XL: HXL421FC

World-class in heavy duty wheel alignment!



FIXED COLUMN CONFIGURATION [

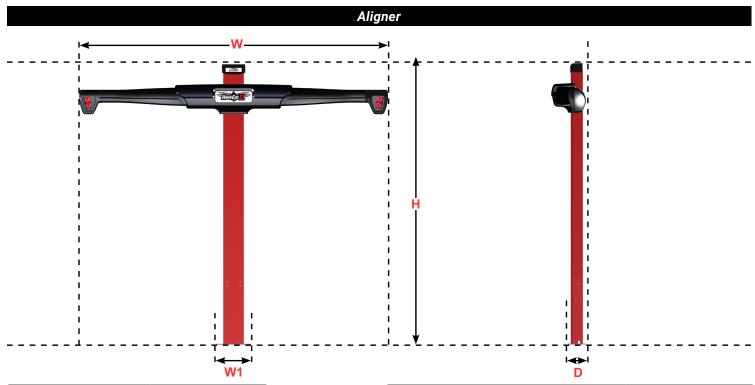

HXL421FC		
Width (W)	134 in. 3403 mm	
Height (H)	122.5 in. 3112 mm	
Depth (D)	15 in. 381 mm	
Base Width (W1)	33 in. 838 mm	

	HXL421FC
Sensor Mount Type	Fixed Single Column Floor Mount
Power Requirements	Supplied by console
TDXL Targets	√
QuickComp	√
High Resolution Cameras	√
FIA Compatible	√
Adaptor Hanger Brackets	√
Multiple Target Storage Configurations	√
Customizable Lighted Sign	√



HAWKEYE® XL: HXL421FC

World-class in heavy duty wheel alignment!



SPECIFICATIONS / ADJUSTMENTS / MEASUREMENTS



^{*} Requires optional wide-angle target extensions.

^{**} Requires optional Ride Height targets, only supported for two axle, light duty vehicles.

SPECIFICATIONS		
Weight of Target (with adaptor)	13 lbs	
Profile of Target	Length 15 in. Width 11 in.	
Compensation Methods	Forward Rolling and Jacking	
Camera Resolution	5 MP	
Track Width	102 in.	
Min Distance from Turnplate to Wall	130 in.	
Suggested Distance from cameras to center of turnplates	135 in.	
Minimum distance from cameras to turnplates	120 in.	
Recommended maximum distance from cameras to furthest targets	700 in.	

ADJUSTMENTS		
Way Up Way Out WinToe	√ ∗	
Wheel-Off Adjustment	Optional for medium and light duty	

MEASUREMENTS		
S.A.I. & Included Angle	√	
Set Back	√	
Max Steering Angle	To Lock*	
Lateral Offset	√	
Rear Set Back	√	
Axle Offset	√	
SBDA	√ **	
Body Angle	√ **	
Body Wheel Offset & Setback	√ **	
Body Roll	√ **	

INCLUDED WITH ALL HXL421FC SENSORS

Self Centering Clamp (Qty 6)



TDXL Targets (Qty 6)



Clamp to Target Adaptor (Qty 4)



Hangers (Qty 6)







Clamp to Target Adaptor with

For alignment information visit: hunter.com/hawkeye-xl

For local contact visit: hunter.com/contact

For general inquiries visit: www.hunter.com or call 800-448-6848